

Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Surge protection plug for the base element, normal mode voltage coarse and fine protection for two floating double wires in IT. Design: 12 V DC

Product Features

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Base element remains an integral part of the installation
- ✓ Consistent plug-in signal circuit protection
- ✓ Protection for fieldbus systems, PROFIBUS, and signal circuits with 3 to 5-wire technology
- ✓ Impedance-neutral disconnection of plug for test and maintenance purposes



Key commercial data

package_quantity	10
GTIN	4017918591113

Technical data

Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Pitch unit	1 Div.

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	PA
Inflammability class according to UL 94	V0
Color	black
Standards for air and creepage distances	DIN VDE 0110-1
Standards for air and creepage distances	IEC 60664-1
Mounting type	On base element

Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

Technical data

General

Design	DIN rail module, two-section, divisible
Number of positions	5
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00

Protective circuit

IEC test classification	C1
IEC test classification	C2
IEC test classification	C3
IEC test classification	D1
VDE requirement class	C1
VDE requirement class	C2
VDE requirement class	C3
VDE requirement class	D1
Nominal voltage U_N	12 V DC
Maximum continuous operating voltage U_C	13 V DC
Maximum continuous operating voltage U_C	9 V AC
Maximum continuous voltage U_C (wire-wire)	13 V DC
Maximum continuous voltage U_C (wire-wire)	9 V AC
Maximum continuous voltage U_C (wire-ground)	13 V DC (with PT 2x2-BE)
Nominal current I_N	450 mA (45°C)
Operating effective current I_C at U_C	$\leq 5 \mu A$
Residual current I_{PE}	$\leq 4 \mu A$ (with PT 2x2-BE)
Residual current I_{PE}	$\leq 1 \mu A$ (with PT 2x2+F-BE)
Nominal discharge current I_n (8/20) μs (Core-Core)	10 kA
Nominal discharge current I_n (8/20) μs (Core-Earth)	10 kA
Total surge current (8/20) μs	20 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Core)	10 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Earth)	10 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Core)	67 A
Impulse discharge current (10/350) μs, peak value I_{imp}	2.5 kA
Output voltage limitation at 1 kV/μs (Core-Core) spike	$\leq 50 V$
Output voltage limitation at 1 kV/μs (Core-Earth) spike	$\leq 450 V$
Output voltage limitation at 1 kV/μs (Core-Earth) spike	$\leq 1 kV$ (with PT 2x2+F-BE)
Output voltage limitation at 1 kV/μs (Core-Core) static	$\leq 25 V$
Output voltage limitation at 1 kV/μs (Core-GND) static	$\leq 450 V$
Residual voltage at I_n, (conductor-conductor)	$\leq 25 V$
Residual voltage with I_{an} (10/1000)μs (conductor-conductor)	$\leq 23 V$
Voltage protection level U_P (Core-Core)	$\leq 100 V$ (C2 (10 kV/5 kA))
Voltage protection level U_P (Core-Earth)	$\leq 450 V$ (C2 (10 kV/5 kA))

Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

Technical data

Protective circuit

Response time t_A (Core-Core)	≤ 500 ns
Response time t_A (Core-Earth)	≤ 500 ns
Input attenuation a_E , sym.	0.2 dB (≤ 5 MHz)
Cut-off frequency f_g (3 dB), sym. in 100 Ohm system	typ. 70 MHz
Capacity (Core-Core)	typ. 30 pF
Resistance in series	2.2 Ω
Max. required back-up fuse	500 mA (e.g. T in acc. with IEC 127-2/III)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 (2.5 kA)

Connection data

Connection method	Screw connection (in connection with the base element)
Connection type IN	PLUGTRAB plug-in system
Connection type OUT	PLUGTRAB plug-in system
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
-------------	----------

Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

classifications

UNSPSC

UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

approvals

UL Listed / cUL Listed / cULus Listed / UL Listed / GOST / GL /

Approval details

UL Listed 

cUL Listed 

cULus Listed 



Nominal voltage UN	24 V
Nominal current IN	0.45 A
mm²/AWG/kcmil	

GOST 

GL

accessories

Marker pen

Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

accessories

X-PEN 0,35 - 0811228



Terminal marking

ZBF 5:UNBEDRUCKT - 0808642



ZBF 5/WH-100:UNBEDRUCKT - 0808668



Labeled terminal marker

ZBF 5,LGS:FORTL.ZAHLEN - 0808671



ZBF 5,LGS:GERADE ZAHLEN - 0810821



Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

accessories

ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



ZBF 5,QR:FORTL.ZAHLEN - 0808697



Device marking

ZBN 18:UNBEDRUCKT - 2809128



accessories

ZBF 15:SO/CMS - 0814717



ZBF 5:SO/CMS - 0808707



Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

accessories

ZBN 18:SO/CMS - 0800763




Drawings

Diagram



Surge protection connector - PT 2X2-HF-12 DC-ST - 2839570

Dimensioned drawing

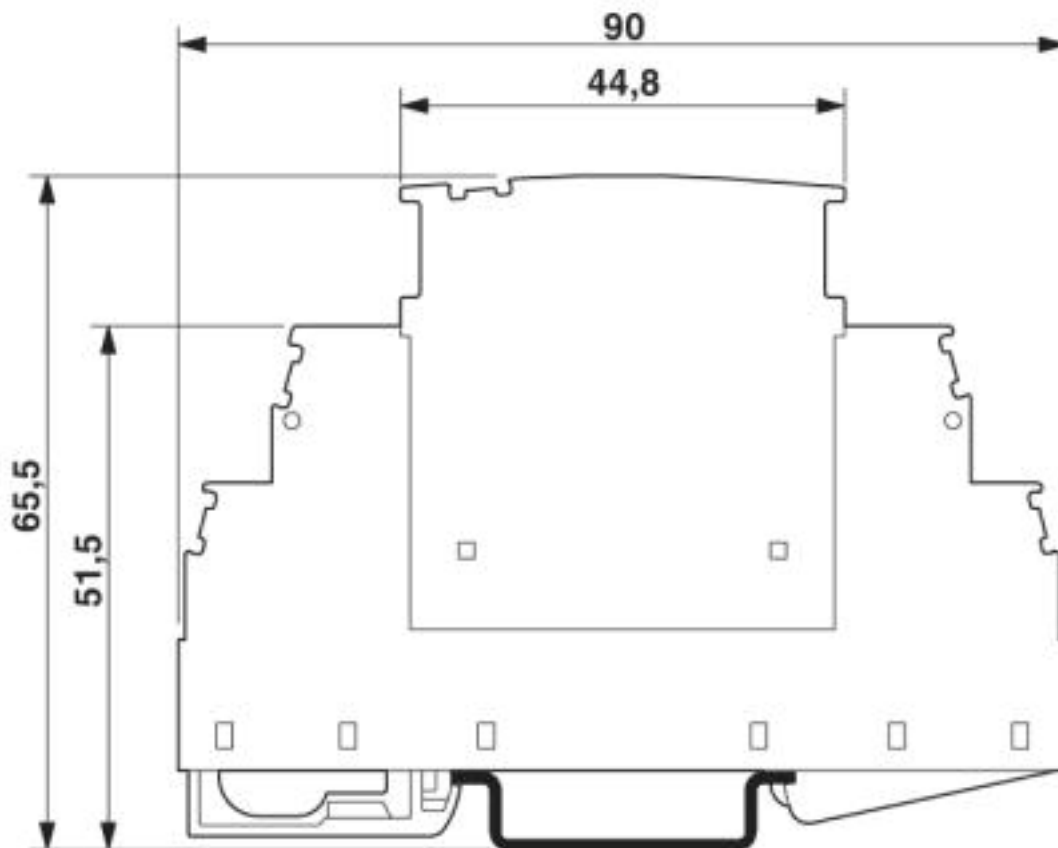

The figure shows the complete module consisting of a base element and connector

Circuit diagram

