U.I. Lapp GmbH

DATASHEET



EPIC® TB-H-BE 16

70315100 14.11.2013

For convenient, clear wiring in control cabinets. Assembly in panel-mount base housings.

Standard H-BE inserts for use with switch cabinets

Pluggable with H-BE male inserts in hoods

Fastening on side = "left" means that when mounting the terminal adapter on the left wall of a control cabinet, the PE connection and pin "1" are on the "top" side





Info

Plug connection for control cabinets

Application range

Control cabinet manufacturing Plant engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Rated impulse voltage:

Article: TB-H-BE 16 BRE

Version: female
Fastening on side: right
Contacts: 1 - 16
Pieces / PU: 10

Rated voltage (V): IEC: 500 V UL: 600 V CSA: 600 V

6 kV

Rated current (A): IEC: 16 A

UL: 16 A CSA: 16 A

Contacts: Copper alloy, hard silver-plated

Number of contacts: 16 + PE

Termination methods: Screw termination: 0.5 - 4 mm²

Cycle of mechanical operation: 200


Temperature range: -40 °C to +100 °C, short-term up to +125 °C


Degree of soiling: 3


Product Management	Document: EPIC® TB-H-BE 16	1/2
--------------------	----------------------------	-----


U.I. Lapp GmbH	DATASHEET	LAPP GROUP
	EPIC® TB-H-BE 16	70315100
	EFIC® IB-II-BE 10	14.11.2013



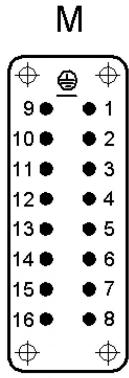

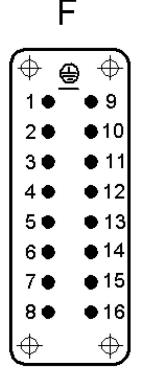

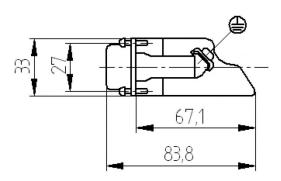

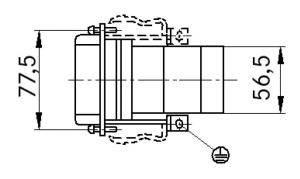

Product Management	Document: EPIC® TB-H-BE 16	2/2
		1