

8600 Rocker Switches - Miniature 10A 250Vac Single & Double Pole

rocker switches



- ▶ Miniature rocker switch
- ▶ Ratings up to 16A, 250Vac
- ▶ Single & double pole
- ▶ ON/OFF, C/O, biased and centre off switching
- ▶ Push on, solder and PCB terminals
- ▶ Illuminated and non-illuminated
- ▶ Matching indicators
- ▶ Panel cut out
single: 19.3 x 12.9
double: 19.3 x 21.9



10(4)A 250Vac T90 (unless noted below)



UL CSA See ratings below
UL 65°C, file E45221, CSA file LR10990


In house test

Inrush 50A to EN61058-1 & 10A 24Vdc



RoHS compliant

3mm contact gap except where marked μ .
Technical data on pages 4 & 5 (switches), 6 (indicators).



TERMINAL	FUNCTION		ROCKER
<p>H</p> <p>4.8 x 0.8</p>	<p>Approvals & ratings vary with function</p>	<p>ON OFF Switches are ON when pressed over terminal 3</p>	<p>V Curved</p>
	<p>ON - OFF</p>	<p>8600 10(4)A 16A 250V, 10A 277V 1/2HP 277V, 1/4HP 125V</p>	<p>8650 10(4)A 10A 277V 1/2HP 277V, 1/4HP 125V</p>
	<p>ON - OFF (momentary ON)</p>	<p>8601 6(1)A 16A 250V, 6A 277V</p>	<p>8651 6(1)A 6A 277V</p>
	<p>ON - OFF (momentary OFF)</p>	<p>8602 10A 16A 250V, 10A 277V</p>	<p>8652 10(4)A 6A 277V</p>
	<p>ON - OFF Lit</p>	<p>N/A</p>	<p>8653 10(4)A 6A 277V</p>
	<p>ON - ON</p>	<p>8610 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V</p>	<p>8660 6(1)A 10A 277V, 1/2HP 277V 1/2HP 277V, 1/4HP 125V</p>
	<p>ON - ON (momentary 1 side)</p>	<p>8611 6A 277V</p>	<p>8661 6A 277V</p>
	<p>ON - OFF - ON</p>	<p>8620 μ See page 16</p>	<p>8670 μ See page 16</p>
<p>Double Pole switches with "X" terminals are supplied without terminal barriers</p>	<p>Indicator</p>	<p>8630</p>	<p>H Slotted for actuator (8600 and 8610 only)</p> <p>F Flat Indicator only (Single pole)</p>



H8600VB ---
T8600VB ---



H8600VB ---
T8600VB ---



H8630FB ---
T8630FB ---



H8650VB ---
T8650VB ---



H8660VB ---
T8660VB ---



H8653VB ---
T8653VB ---

BODY

B Single pole

Panel cut-out

12.9

Bezel

15.0

21.0

Single Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

B (Double Pole) with terminal barrier
BC (Double Pole) w/o terminal barrier

Panel cut-out

21.9

Bezel

24.0

21.0

Double Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

OPTIONS

Finish
Matt finish only.

Colour
Call sales for custom colours.
A full range is available for large orders.

Legend printing
Select from the examples or call sales for custom legend.


Lamp voltage
Call sales for details of available voltages.

Blanking plate A8634FB
Dummy unit to fill unused panel holes.
Single pole size only.

Protective covers
L167 for SP
L180 for DP
(designed to IP65)
Snap on to bodies with V rocker or F lens, this reduces maximum acceptable panel thickness to 2.2mm.

Single Pole options
Most switches shown can have single pole switching in double pole bodies.

DIMENSIONS (mm)

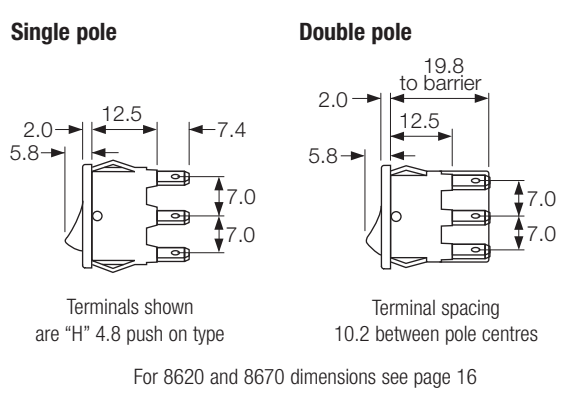

Examples of printing



Cut-outs must be punched in the direction of insertion