# LA6

## Signal Tower



#### Display a variety of colors in various ways to improve your processes.


Outer

Mounting Hole (Ø5) Ø40.

(346)

#### **FEATURES**

- Indicate abnormal conditions with a variety of color patterns.
   Can freely set up multiple colors. For example, a serious condition can be indicated with the "All-point Lighting" where the entire signal tower is the same color, thus conveying important information.
- Use "Operating Modes" to enhance a visual status condition.
   The downloadable program can be used to make patterns change at set intervals so the signal tower can be used to count time or set a pace.
- Simple and easy to use complimentary programming software. The downloadable complimentary programming software can be used to easily control which colors are displayed and how they are to behave.

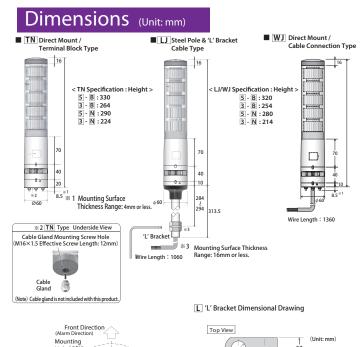

60 — 81


Bottom View

Side View

Wiring Hole (Ø12<sup>®2</sup>)

( TN Type)

#### How to Order

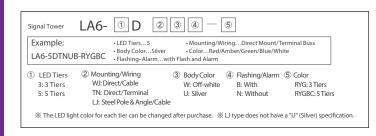



#### Replacement Parts



Headcover (Off-white) B31310001-7F1 (Silver) B31310001-9F1



USB Port Cover (Off-white) B22100071-7F1 (Silver) B22100071-9F1



Waterproof Ring 'B' B25110042-F1



Pole Bracket (Off-white) B22210134-7F1



Waterproof O-ring B25110047-F1




The alarm has a total of 11 sounds to

The water-resistant speaker design is able to play clear sounds of up to 85 dB (at 1m) despite it's compact size. Alarm sounds can be

match various applications.

set up with every display pattern.

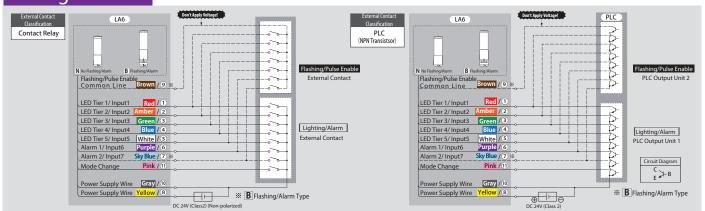

# Specifications

Consumption   Maximum   LAG-5 D_DEM-YYYY   W   LAG-5 D_DEM-YYYY   SW   LAG-5 D_DEM-YYY   S.SW     Test Condition   Power Consumption test with alarm set at Alarm Sound No.1 at maximum volume	Model		LA6-aDaaa-a						
Special Consumption									
Standard   Me5 Dm-N NYGE   SW									
Consumption			LA6-5 D□□N-RYGBC	5W		LA6-5 [	D□□B-RYGBC	6.5W	
LAS-3D-IN-NYY	Rated Power		LA6-3D□□N-RYG	3.5W		LA6-3D	⊃□B-RYG	4.5W	
Fest Condition   Fest	Consumption	Maximum	LA6-5 D□□N-YYYYY	7W		LA6-5 [	D□□B-YYYYY	8W	
Signal Wire Current			LA6-3D□□N-YYY	4.5W		LA6-3D	0□□B-YY	5.5W	
Standby Current   Maximum 15mA   -25 ii to +60 ii	Test Condition		Power Consumption test with alarm set at Alarm Sound No.1 at maximum volume						
Operating Ambient Temperature Departing Humidity Range Class than 90% RH (No Dew or Condensation) Storage Temperature Range Storage Humidity Range Class than 90% RH (No Dew or Condensation) Mounting Direction Mounting Direction Protection Rating Test Condition  LA6-□□Lian  Sweep Durability: Total amplitude of a murp pt 10 - 57.5 Hz), Acceleration: 20.0 m/s2 (57.5 - 150 Hz) Fixed pitch durability: Acceleration 20.0 m/s2 (57.5 - 150 Hz) Fixed pitch durability: Acceleration 20.0 m/s2 (57.5 - 150 Hz) Fixed Vibration Resistance  Vibration Resistanc	Signal Wire Current								
Temperature   Capacity   Capaci	Standby Current		Maximum 15mA						
Storage Humidity Range Storage Humidity Range Cless than 90% RH (No Dew or Condensation) Mounting Location Mounting Location Mounting Direction Protection Rating Test Condition  LA6-DLDD  LA6-DLDD  Sweep Durability: Total amplitude: 0.3 mmp-p (10 - 57.5 Hz), Acceleration: 20.0 m/s2 (57.5 - 150 Hz)  Fixed Vibration Resistance  Wibration Resistance  Test Condition	Operating Ambient Temperature								
Less than 99% RH No Dew or Condensation	Operating Humidity Range		Less than 90% RH (No Dew or Condensation)						
Mounting Direction   Indoor Only	Storage Temperature Range								
Mounting Direction   Protection Rating   Pro	Storage Humidity Range		·						
Test Condition	Mounting Location		· · · · · · · · · · · · · · · · · · ·						
Test Condition	Mounting Direction								
Sweep Durability: Total amplitude: 0.3 mmp-p (10 - 57.5 Hz), Acceleration: 20.0 m/s2 (57.5 - 150 Hz)	Protection Rating								
LAG-DICLICID		tion							
LAG-BINDED   LAG	Vibration Resistance		LA6-uuLJuu Acceleration: 20.0 m/s2 (57.5 - 150 Hz) Fixed pitch durability: Acceleration 20.0 m/s2						
Test Condition Insulation Resistance More than 1 Mohm at DC500V between the power input lead and chassis. Withstand Voltage Display Color (Typical Luminous Intensity)  Alarm Sound (Typical Frequency)  Sound Level Test Condition  Alarm Sound No. 1   2400Hz & 3375Hz Multiplexed Beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 12   400Hz Fast intermittent beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 10   2400Hz Fast intermittent beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 10   2400Hz Fast intermittent beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 10   2400Hz Fast intermittent beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 10   2400Hz Fast intermittent beep No. 11   4000Hz & 4800Hz Multiplexed Beep No. 10   2400Hz Fast intermittent beep No. 12   2400Hz Fast intermittent beep No. 13   3600Hz Fast intermittent beep No. 14   2400Hz Fast intermittent beep No. 15   3600Hz Continuous beep No. 10   2400Hz Fast intermittent beep No. 10   2400Hz Fast			LAG						
Test Condition   Tested while installed in an upright position   Insulation Resistance   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mohm at DCS00V between the power input lead and chassis.   More than 1 Mo			Fixed vibration Frequency Durability: Acceleration 10.0 m/s2						
More than 1 Mohm at DC500V between the power input lead and chassis.	Tost Condition								
Source   S									
Display Color			· · · · · · · · · · · · · · · · · · ·						
Purple (800 mcd) pink (850 mcd) cyan (2150 mcd)   Purple (800 mcd) pink (850 mcd) cyan (850 mcd)   Purple (800 mcd) pink (850 mcd) cyan (850 mcd)   Purple (800 mcd) pink (850 mcd) cyan (850 mcd)   Purple (850 mcd) cyan (850 mcd) cyan (850 mcd) cyan (850 mcd)   Purple (850 mcd) cyan	<del></del>								
Flash Rate    60 ±2 fpm     No. 1   2400Hz Continuous beep sound   No. 2   2400Hz Rapid intermittent beep     No. 3   2400Hz Long intermittent beep   No. 4   2400Hz Fast intermittent beep     No. 5   3600Hz Continuous beep   No. 6   3600Hz Rapid intermittent beep     No. 7   3600Hz Long intermittent beep   No. 6   3600Hz Rapid intermittent beep     No. 7   3600Hz Long intermittent beep   No. 8   3600Hz Rapid intermittent beep     No. 9   2400Hz & 3375Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep     No. 11   4000Hz & 4800Hz Multiplexed Beep     No. 11   4000Hz & 4800Hz Multiplexed Beep     No. 10   2400Hz & 3600Hz Multiplexed Beep     No. 11   4000Hz & 4800Hz Multiplexed Beep     No. 10   2400Hz & 3600Hz Multiplexed Beep     No. 11   4000Hz & 4800Hz Multiplexed Beep     No. 10   2400Hz & 3600Hz Multiplexed Beep     No. 11   4000Hz & 4800Hz Multiplexed Beep     No. 10   2400Hz & 3600Hz Multiplexed Beep     No. 1	(Typical Luminous Intensity)		Purple (800 mcd) pink (850 mcd) cyan (2150 mcd) lemon (2150 mcd)  * Due to the characteristics of the LED elements, a variation in difference of the color tone and brightness of						
Alarm Sound (Typical Frequency)  No. 3 2400Hz Long intermittent beep No. 6 3600Hz Rapid intermittent beep No. 7 3600Hz Long intermittent beep No. 8 3600Hz Fast intermittent beep No. 9 2400Hz & 3375Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 11 4000Hz & 4800Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 11 4000Hz & 4800Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 11 4000Hz & 4800Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multip	Flash Rate								
No. 5   3600Hz Continuous beep   No. 6   3600Hz Rapid intermittent beep			<u> </u>						
No. 7   3600Hz Long intermittent beep   No. 8   3600Hz Fast intermittent beep   No. 9   2400Hz & 3375Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz Multiplexed Beep   No. 11   4000Hz & 4800Hz Multiplexed Beep   No. 10   2400Hz & 3600Hz	Alarm Sound (Typical Frequency)								
No. 9 2400Hz & 3375Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 11 4000Hz & 4800Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 11 4000Hz & 4800Hz Multiplexed Beep No. 10 2400Hz & 3600Hz & 3600Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep No. 10 2400Hz & 3600Hz & 3						No. 6	No. 6 3600Hz Rapid intermittent beep		
No. 11   4000Hz & 4800Hz Multiplexed Beep   Sound Level   Maximum: 85dB     Test Condition   Alarm Sound No.1 measured from the front direction of the alarm opening at 1m									
Maximum: 85dB   Test Condition   Alarm Sound No.1 measured from the front direction of the alarm opening at 1m			No. 9 2400Hz & 3375Hz Multiplexed Beep No. 10 2400Hz & 3600Hz Multiplexed Beep						
Test Condition  Alarm Sound No.1 measured from the front direction of the alarm opening at 1m  The set up button is the fourth step (Factory Default: Maximum).  [Maximum] -> [-5dB drop from maximum (standard)] -> [-10dB drop from maximum (standard)] -> [OFF] (-> Returns to [Maximum])  Data Transfer Interface  Main Unit  Transfer Cable  Application Software  Mass (Tolerance 10%)  Mass (Tolerance Standards  Total Compliance Standards  Alarm Sound No.1 measured from the front direction of the alarm opening at 1m  The set up button is the fourth step (Factory Default: Maximum).  Interface Interface (Maximum)  Alarm Sound No.1 measured from the front direction of the alarm opening at 1m  The set up button is the fourth step (Factory Default: Maximum).  [Maximum] -> [-5dB drop from maximum (standard)] -> [OFF] (-> Returns to [Maximum])  USB micro-B Terminal Female  USB2.0/1.1 Interface, Transmission Rate: USB2.0/1.1/1.0  Data Transfer Micro USB (not included); Connector: USB Male- USB (MicroB) male  Exclusive Application Software (Downloadable from our Homepage)  LA6-3DTN B 480g LA6-3DL B 980g LA6-3DW B 450g  LA6-3DTN B 480g LA6-3DL B 980g LA6-3DW B 450g  LA6-3DTN B 420g LA6-3DL B 980g LA6-3DW B 400g  LA6-5 DTN B 590g LA6-5 DL B 1090g LA6-5 DW B 560g  LA6-5 DTN B 590g LA6-5 DL B 1090g LA6-5 DW B 500g  LA6-5 DTN B 530g LA6-5 DL B 1090g LA6-5 DW B 510g  EMC Directive (EN 61000-6-4, EN 61000-6-2)  ROMPING TO THE ALAR SIMPLE AND THE									
The set up button is the fourth step (Factory Default: Maximum).  [Maximum] -> [-5dB drop from maximum (standard)] -> [-10dB drop from maximum (standard)] -> [OFF] (-> Returns to [Maximum])  Data Transfer Interface    Main Unit   USB micro-B Terminal   Female   USB2.0/1.1 Interface, Transmission Rate: USB2.0/1.1/1.0    Transfer Cable   Charge / Data Transfer Micro USB (not included); Connector: USB Male- USB (MicroB) male    Application Software   Exclusive Application Software (Downloadable from our Homepage)    LA6-3DTN   B   480g   LA6-3DLJ   B   980g   LA6-3DWJ   B   450g     LA6-3DTN   A20g   LA6-3DLJ   B   980g   LA6-3DWJ   B   400g     LA6-5 DTN   B   590g   LA6-5 DLJ   B   1090g   LA6-5 DWJ   B   560g     LA6-5 DTN   S30g   LA6-5 DLJ   B   1040g   LA6-5 DWJ   B   510g     LA6-5 DTN   S30g   LA6-5 DLJ   B   1040g   LA6-5 DWJ   B   510g     EMC Directive (EN 61000-6-4, EN 61000-6-2)   RoHS Directive (EN 50581)  UL508, CSA-C22.2 No.14   KC (KN 61000-6-4, KN 61000-6-2)     FCC Part 15 SubpartB Class A   CE Marking	Sound Level								
Main Unit   USB micro-B Terminal   Female   USB2.0/1.1 Interface, Transmission Rate: USB2.0/1.1/1.0	Test Condition		1 9						
Main Unit   USB micro-B Terminal   Female   USB2.0/1.1 Interface, Transmission Rate: USB2.0/1.1/1.0	Volume Control		[Maximum] -> [-5dB drop from maximum (standard)] -> [-10dB drop from maximum (standard)] -> [OFF] (->						
Interface   Transfer Cable   Charge / Data Transfer Micro USB (not included); Connector: USB Male- USB (MicroB) male	Data Transfer								
Mass (Tolerance 10%)       LA6-3DTN□B       480g       LA6-3DLJ□B       980g       LA6-3DWJ□B       450g         LA6-3DTN□N       420g       LA6-3DLJ□N       930g       LA6-3DWJ□N       400g         LA6-5 DTN□B       590g       LA6-5 DLJ□B       1090g       LA6-5 DWJ□B       560g         LA6-5 DTN□N       530g       LA6-5 DLJ□N       1040g       LA6-5 DWJ□N       510g         EMC Directive (EN 61000-6-4, EN 61000-6-2)       ROHS Directive (EN 50581)         UL508, CSA-C22.2 No.14       KC (KN 61000-6-4, KN 61000-6-2)         FCC Part 15 SubpartB Class A	Interface	Cable							
Mass (Tolerance 10%)       LA6-3DTN□N       420g       LA6-3DLJ□N       930g       LA6-3DWJ□N       400g         LA6-5 DTN□B       590g       LA6-5 DLJ□B       1090g       LA6-5 DWJ□B       560g         LA6-5 DTN□N       530g       LA6-5 DLJ□N       1040g       LA6-5 DWJ□N       510g         EMC Directive (EN 61000-6-4, EN 61000-6-2)       RoHS Directive (EN 50581)         Compliance Standards       UL508, CSA-C22.2 No.14       KC (KN 61000-6-4, KN 61000-6-2)         FCC Part 15 SubpartB Class A       CE Marking	Application Software			_					
LA6-5 DTN <sub>D</sub> B   590g   LA6-5 DLJ <sub>D</sub> B   1090g   LA6-5 DWJ <sub>D</sub> B   560g     LA6-5 DTN <sub>D</sub> N   530g   LA6-5 DLJ <sub>D</sub> N   1040g   LA6-5 DWJ <sub>D</sub> N   510g     EMC Directive (EN 61000-6-4, EN 61000-6-2)   RoHS Directive (EN 50581)     Compliance Standards   UL508, CSA-C22.2 No.14   KC (KN 61000-6-4, KN 61000-6-2)     FCC Part 15 SubpartB Class A   CE Marking   CE Mark								-	
LA6-5 DTNDN         530g         LA6-5 DLJDN         1040g         LA6-5 DWJDN         510g           EMC Directive (EN 61000-6-4, EN 61000-6-2)         RoHS Directive (EN 50581)           Compliance Standards         UL508, CSA-C22.2 No.14         KC (KN 61000-6-4, KN 61000-6-2)           FCC Part 15 SubpartB Class A         CE Marking	Mass (Toleran	ce 10%)							
EMC Directive (EN 61000-6-4, EN 61000-6-2) RoHS Directive (EN 50581)  Compliance Standards UL508, CSA-C22.2 No.14 KC (KN 61000-6-4, KN 61000-6-2)  FCC Part 15 SubpartB Class A CE Marking				_					
Compliance Standards UL508, CSA-C22.2 No.14 KC ( KN 61000-6-4, KN 61000-6-2) FCC Part 15 SubpartB Class A CE Marking									
FCC Part 15 SubpartB Class A CE Marking	Com !!- C:	- ا - مام سام				-			
Remarks UL Recognized Component (File No.E215660)	•		FCC Part 15 SubpartB Class A			CE N	CE Marking		
	Remarks				UL Recogniz	zed Con	nponent (File No	o.E215660)	

### Success Story

