

UNIVERSAL

GOAL ZERO **YETI**[®]150 SOLAR GENERATOR

Portable Wall Outlet

Powers laptops, lights and phones anywhere you need them with a built-in AC inverter.

Easy to Carry

Convenient pop-up handle to take it along for the ride.


Solar Ready™

Quickly refuel from wall, car or sun — car charger and solar panel sold separately.




#61208

HOW IT WORKS

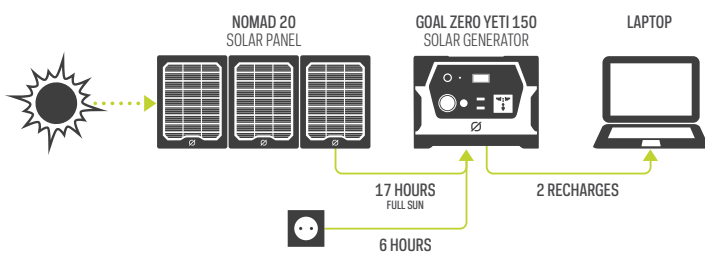

WHAT IT POWERS

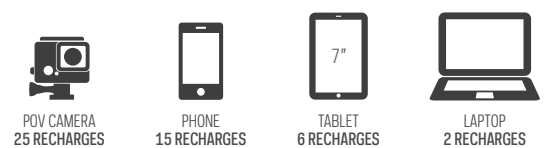


GOAL ZERO YETI[®]150 SOLAR GENERATOR



*Goal Zero Yeti 150 Solar Generator with 110V AC shown in photo.

- A** Charging Port
- B** Charging Indicator Light
- C** Battery Display
- D** 12 Volt Ports
- E** USB Ports
- F** AC Port

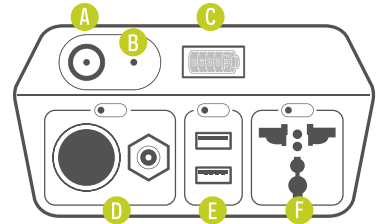

CHARGE TIME

Wall charger (45W)	6 hours
Car charger (30W)	8 hours
Nomad 20	17-34 hours

TECHNICAL SPECIFICATIONS

INPUTS: Charging Port: 14-29V, up to 5A (60W max)

OUTPUTS: 220V AC Unit Inverter (output, 50Hz, modified sine wave)
Universal or Australia (type 1) AC Plugs: 220V, 0.4A (80W continuous, 160W surge max)

12V Car Port: 12V, up to 10A (120W max)

6mm 12V Port: 12V, up to 10A (120W max)

2x USB Ports: 5V, up to 2.1A (10.5W max), regulated modified sine wave

GENERAL: Weight: 12 lbs (5.4 kg)

Dimensions: 7.75 x 5.75 x 6.75 in (19.7 x 14.6 x 17.2 cm)

BATTERY: Cell Chemistry: AGM Lead Acid

Pack Capacity: 168Wh (12V, 14Ah)

