

# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Hybrid motor starter for reversing 3~ AC motors up to 550 V AC, with 24 V DC input, 2.4 A output current, emergency stop function, adjustable overload shutdown, higher transient voltage strength, and push-in connection.

The figure shows the ELR H5-IES-PT-24DC/500AC-2 version

## Your advantages

- 22.5 mm wide
- Safety level according to IEC 61508-1: SIL 3, ISO 13849: PL e
- Reduction in wiring
- Space saving
- Long service life
- 3-phase loop bridges
- Adjustable current for bimetal function
- Low-wear switching

## Key commercial data

package_quantity	1
GTIN	4055626024608

## Technical data

### Device supply

Rated control circuit supply voltage $U_s$	24 V DC
Control supply voltage range	19.2 V DC ... 30 V DC
Rated control supply current $I_s$	40 mA
Type of protection	Surge protection
Type of protection	Reverse polarity protection

### Input data

Input name	Control input right/left
Rated actuating voltage $U_c$	24 V DC
Triggering voltage range	19.2 V DC ... 30 V DC
Rated actuating current $I_c$	5 mA
Switching threshold	9.6 V ("0" signal)
Switching threshold	19.2 V ("1" signal)
Switching level	< 5 V DC (For EMERGENCY STOP)
Typical turn-off time	< 30 ms

# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Technical data

### Input data

Type of protection	Reverse polarity protection
--------------------	-----------------------------

### Output data load output

Output name	AC output
Rated operating voltage $U_e$	500 V AC
Operating voltage range	42 V AC ... 550 V AC
Rated operating current $I_e$	2.4 A (AC-51)
Rated operating current $I_e$	2.4 A (AC-53a)
Mains frequency	50/60 Hz
Load current range	180 mA ... 2.4 A (see to derating)
Trigger characteristic in acc. with IEC 60947-4-2	Class 10A
Cooling time	20 min.
Leakage current	0 mA
Type of protection	Surge protection

### Output data reply output

Output name	Acknowledge output
Note	Confirmation: floating change-over contact, signal contact
Contact type	1 PDT
Switching capacity according to IEC 60947-5-1	3 A (230 V, AC15)
Switching capacity according to IEC 60947-5-1	2 A (24 V, DC13)

### General

Switching frequency	$\leq 2$ Hz (Load-dependent)
Mounting position	vertical (horizontal DIN rail, motor output below)
Mounting type	DIN rail mounting
Assembly instructions	alignable, for spacing see derating
Operating mode	100% operating factor
Maximum power dissipation	4.1 W
Minimum power dissipation	0.88 W
Operating voltage display	Green LED
Status display	Yellow LED
Indication	Red LED

### Connection data, input side

Connection name	Control circuits
Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14

### Connection data, output side

Connection name	Load circuit
-----------------	--------------

# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Technical data

### Connection data, output side

<b>Connection method</b>	Push-in connection
<b>Stripping length</b>	10 mm
<b>Conductor cross section solid</b>	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
<b>Conductor cross section flexible</b>	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
<b>Conductor cross section AWG</b>	24 ... 14

### Ambient conditions

<b>Ambient temperature (operation)</b>	5 °C ... 70 °C (observe derating)
<b>Ambient temperature (storage/transport)</b>	-40 °C ... 80 °C
<b>Degree of protection</b>	IP20

### Dimensions

<b>Width</b>	22.5 mm
<b>Height</b>	99 mm
<b>Depth</b>	114.5 mm

### UL data

<b>SCCR</b>	100 kA (480 V AC (fuse: 30 A class CC/30 A class J (high fault)))
<b>SCCR</b>	5 kA (480 V AC (fuse: 20 A RK5 (standard fault)))
<b>FLA</b>	2.4 A (480 V AC)
<b>Group installation</b>	20 A (class RK5, SCCR 5kA, #24 - 14 AWG max. solid and stranded)
<b>Group installation</b>	30 A (class CC or J, SCCR 100kA, #24 - 14 AWG max, solid and stranded)
<b>Category code</b>	NLDX / NRNT

### Insulation characteristics

<b>Rated insulation voltage</b>	500 V
<b>Rated surge voltage</b>	6 kV
<b>Overvoltage category</b>	III
<b>Degree of pollution</b>	2
<b>Designation</b>	Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit
<b>Insulation</b>	Safe isolation (IEC 60947-1) at operating voltage ≤ 300 V AC
<b>Insulation</b>	Safe isolation (EN 50178) at operating voltage ≤ 300 V AC
<b>Insulation</b>	Basic isolation (IEC 60947-1) at operating voltage 300 ... 500 V AC
<b>Insulation</b>	Safe isolation (EN 50178) at operating voltage 300 ... 500 V AC
<b>Designation</b>	Isolation characteristics between the control input and control supply voltage to auxiliary circuit
<b>Insulation</b>	Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC
<b>Insulation</b>	Safe isolation (EN 50178) in the auxiliary circuit ≤ 300 V AC

### Standards and Regulations

<b>Designation</b>	Standards/regulations
<b>Standards/regulations</b>	IEC 60947-1
<b>Standards/regulations</b>	EN 60947-4-2

# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Technical data

### Standards and Regulations

Standards/regulations	IEC 61508
Standards/regulations	ISO 13849
ATEX	Ⓜ II (2) G [Ex e] [Ex d] [Ex px]
ATEX	Ⓜ II (2) D [Ex t] [Ex p]
UL, USA	UL 60947-1
UL, USA	UL 60947-4-1A
UL, USA/Canada	CSA-C22.2 No. 60947-1
UL, USA/Canada	CSA-C22.2 No. 60947-4-1

### Approvals/conformities

Safety Integrity Level according to IEC 61508	≤ 3 (Safe shutdown)
Safety Integrity Level according to IEC 61508	2 (Motor protection)
Category acc. to EN ISO 13849	≤ 3 (Safe shutdown)
Performance level according to ISO 13849	e (Safe shutdown)
ATEX	Ⓜ II (2) G [Ex e] [Ex d] [Ex px]
ATEX	Ⓜ II (2) D [Ex t] [Ex p]
EU-type examination certificate	PTB 07 ATEX 3145
UL, USA	UL 60947-1
UL, USA	UL 60947-4-1A
UL, USA/Canada	CSA-C22.2 No. 60947-1
UL, USA/Canada	CSA-C22.2 No. 60947-4-1
UL certificate	NLDX.E228652

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
China RoHS	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Classifications

### eCl@ss

eCl@ss 5.0	27024002
eCl@ss 5.1	27024002
eCl@ss 6.0	27024002
eCl@ss 7.0	27024002
eCl@ss 8.0	27024002
eCl@ss 9.0	27024002

### ETIM

ETIM 2.0	EC001037
ETIM 3.0	EC001037
ETIM 4.0	EC001037
ETIM 5.0	EC001037
ETIM 6.0	EC001037

# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Classifications

UNSPSC

<b>UNSPSC 13.2</b>	25173902
--------------------	----------

## Approvals

ATEX / UL Listed / cUL Listed / cULus Listed /

## Approval details

**ATEX**

**UL Listed**

**cUL Listed**

**cULus Listed**

## Accessories

### Loop bridge

BRIDGE-PT 2 - 2904490



BRIDGE-PT 3 - 2904491



BRIDGE-PT 4 - 2904492



# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Accessories

BRIDGE-PT 5 - 2904493



BRIDGE-PT 6 - 2904494



BRIDGE-PT 7 - 2904495



BRIDGE-PT 8 - 2904496



BRIDGE-PT 9 - 2904497



BRIDGE-PT 10 - 2904498



# Hybrid motor starter - ELR H5-IES-PT-24DC/500AC-2-T - 2906059

## Accessories

---

### Cover


BRIDGE COVER - 2906240



---

## Drawings

### Diagram

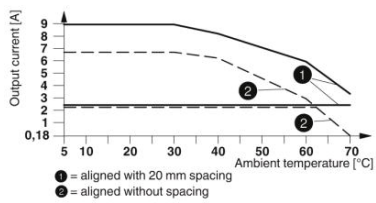

### Derating curve

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>