

Safety relays - PSR-SPP-230UC/ESAM4/3X1/1X2/B - 2901429

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e according to EN ISO 13849, 1 or 2-channel operation, 3 enabling current paths, nominal input voltage: 230 V AC/DC, plug-in spring-cage terminal block

The figure shows the 230 V version.

Your advantages

- Up to Cat.4/PL e according to EN ISO 13849-1, SILCL 3 according to EN 62061, SIL 3 according to IEC 61508
- Manually monitored and automatic activation in a single device
- 3 enabling current paths, 1 signaling current path
- Basic insulation
- Single and two-channel control



Key commercial data

package_quantity	1
GTIN	4046356592208

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	22.5 mm
Height	112 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ...150 Hz, 2g
Maximum altitude	≤ 2000 m (Above sea level)

Safety relays - PSR-SPP-230UC/ESAM4/3X1/1X2/B - 2901429

Technical data

Input data

Nominal input voltage U_N	230 V AC/DC
Input voltage range in reference to U_N	0.85 ... 1.1
Typical input current at U_N	22 mA
Voltage at input/start and feedback circuit	~ 24 V DC
Typical response time	40 ms (man. start)
Typ. starting time with U_s	330 ms (when controlled via A1)
Typical release time	150 ms (when controlled via A1)
Typical release time	20 ms (when controlled via S11/S12 and S21/S22)
Concurrence input 1/2	∞
Recovery time	1 s
Status display	Green LED
Maximum switching frequency	0.5 Hz
Max. permissible overall conductor resistance	50 Ω

Output data

Contact type	3 enabling current paths
Contact type	1 signaling current path
Contact material	AgSnO ₂ , + 0.2 μ m Au
Minimum switching voltage	10 V AC/DC
Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A (N/O contact)
Limiting continuous current	5 A (N/C contact)
Inrush current, minimum	10 mA
Maximum inrush current	6 A
Sq. Total current	72 A ²
Interrupting rating (ohmic load) max.	144 W (24 V DC, $\tau = 0$ ms)
Interrupting rating (ohmic load) max.	230 W (48 V DC, $\tau = 0$ ms)
Interrupting rating (ohmic load) max.	68 W (110 V DC, $\tau = 0$ ms)
Interrupting rating (ohmic load) max.	88 W (220 V DC, $\tau = 0$ ms)
Interrupting rating (ohmic load) max.	2000 VA (250 V AC, $\tau = 0$ ms)
Maximum interrupting rating (inductive load)	48 W (24 V DC, $\tau = 40$ ms)
Maximum interrupting rating (inductive load)	40 W (48 V DC, $\tau = 40$ ms)
Maximum interrupting rating (inductive load)	35 W (110 V DC, $\tau = 40$ ms)
Maximum interrupting rating (inductive load)	33 W (220 V DC, $\tau = 40$ ms)
Switching capacity min.	100 mW
Output fuse	10 A gL/gG NEOZED (N/O contact)
Output fuse	6 A gL/gG NEOZED (N/C contact)

General

Relay type	Electromechanical relay with forcibly guided contacts in accordance with EN 50205
Mechanical service life	Approx. 10 ⁷ cycles

Safety relays - PSR-SPP-230UC/ESAM4/3X1/1X2/B - 2901429

Technical data

General

Nominal operating mode	100% operating factor
Net weight	99.9 g
Mounting type	DIN rail mounting
Mounting position	any
Degree of protection	IP54
Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Control	one and two channel

Connection data

Connection method	Spring-cage connection
pluggable	Yes
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	1.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Stripping length	8 mm

Safety-related characteristic data

Stop category	0
Designation	IEC 61508 - High demand
Safety Integrity Level (SIL)	3
Designation	IEC 61508 - Low demand
Safety Integrity Level (SIL)	3
Designation	EN ISO 13849
Performance level (PL)	e
Category	4
Designation	EN 62061
Safety Integrity Level Claim Limit (SIL CL)	3
Designation	EN 50156
Safety Integrity Level (SIL)	3

Standards and Regulations

Shock	15g
Designation	Air clearances and creepage distances between the power circuits
Standards/regulations	DIN EN 50178/VDE 0160
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	4 kV / basic insulation (safe isolation, reinforced insulation, and 6 kV between A1-A2/logic/enabling and signaling current paths)
Degree of pollution	2
Overvoltage category	III

Safety relays - PSR-SPP-230UC/ESAM4/3X1/1X2/B - 2901429

Technical data

Standards and Regulations

Vibration (operation)	10 Hz ...150 Hz, 2g
-----------------------	---------------------

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
China RoHS	No hazardous substances above threshold values

Classifications

eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371901
eCl@ss 5.1	27371901
eCl@ss 6.0	27371819
eCl@ss 7.0	27371819
eCl@ss 8.0	27371819
eCl@ss 9.0	27371819

ETIM

ETIM 3.0	EC001449
ETIM 4.0	EC001449
ETIM 5.0	EC001449
ETIM 6.0	EC001449


UNSPSC


UNSPSC 6.01	30211901
UNSPSC 7.0901	39121501
UNSPSC 11	39121501
UNSPSC 12.01	39121501
UNSPSC 13.2	39121501


Approvals

UL Listed / cUL Listed / Functional Safety / EAC / EAC / cULus Listed /

Approval details

UL Listed 

cUL Listed 
--

Functional Safety 

Safety relays - PSR-SPP-230UC/ESAM4/3X1/1X2/B - 2901429

Approvals


EAC EAC

ERC

cULus Listed


Drawings

Application drawing

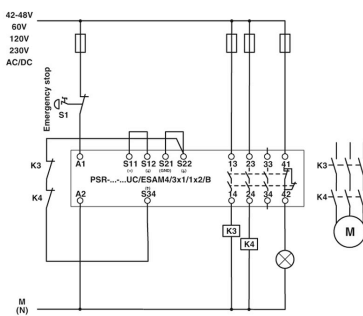

Single-channel emergency stop monitoring

Application drawing

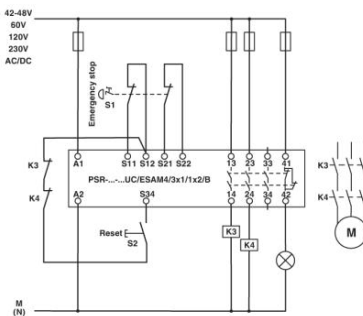

Two-channel emergency stop monitoring

Circuit diagram

