



POSITAL

FRABA

IXARC Absolute Rotary Encoder

UCD-S101B-1312-HSS0-PAQ



Interface

| | |
|-------------------------|---|
| Interface | SSI with Preset |
| Programming Functions | Absolute: Resolution, Revolution, Code, Preset |
| Manual Functions | Preset + complement via cable or connector |
| Interface Cycle Time | $\geq 25 \mu\text{s}$ |
| Number of Preset Cycles | 5,100,000 |
| SSI Format | MMMMMMMMMMMMSSSSSSSSSSSS0 |
| Video Manual | ▶ Watch a simple installation video |

Outputs

| | |
|---------------|-------|
| Output Driver | RS422 |
|---------------|-------|

Electrical Data

| | |
|-----------------------------|-------------------------|
| Supply Voltage | 4.5 - 30 VDC |
| Current Consumption | Typical 50 mA |
| Power Consumption | $\leq 1.0 \text{ W}$ |
| Start-Up Time | $< 250 \text{ ms}$ |
| Clock Input | RS 422, via Optocoupler |
| Clock Frequency | 100 kHz - 2 MHz |
| Reverse Polarity Protection | Yes |
| Short Circuit Protection | Yes |
| EMC: Emitted Interference | DIN EN 61000-6-4 |

Data Sheet

Printed at 28-09-2017 00:09



POSITAL

FRABA

| | |
|---------------------|-------------------|
| EMC: Noise Immunity | DIN EN 61000-6-2 |
| MTTF | 350 years @ 40 °C |

Sensor

| | |
|------------------------|---|
| Technology | Magnetic |
| Resolution Singleturn | 12 bit |
| Resolution Multiturn | 13 bit |
| Multiturn Technology | Self powered magnetic pulse counter (no battery, no gear) |
| Accuracy (INL) | $\pm 0.0878^\circ$ (≤ 12 bit) |
| Sense Signal (Default) | Clockwise shaft movement (front view on shaft) |
| Code | Binary |

Environmental Specifications

| | |
|----------------------------|------------------------------------|
| Protection Class (Shaft) | IP65 |
| Protection Class (Housing) | IP66/IP67 |
| Operating Temperature | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Humidity | 98% RH, no condensation |

Mechanical Data

| | |
|-----------------------------------|--|
| Housing Material | Steel |
| Housing Coating | Cathodic corrosion protection (>720 hrs salt spray resistance) |
| Flange Type | Blind Hollow, \varnothing 58 mm (H) |
| Flange Material | Aluminum |
| Shaft Type | Blind Hollow, Depth = 28 mm |
| Shaft Diameter | \varnothing 9.52 mm (3/8") |
| Shaft Material | Stainless Steel V2A (1.4305, 303) |
| Rotor Inertia | ≤ 30 gcm ² [≤ 0.17 oz-in ²] |
| Friction Torque | ≤ 3 Ncm @ 20 °C (4.2 oz-in @ 68 °F) |
| Max. Permissible Mechanical Speed | ≤ 12000 1/min |
| Shock Resistance | ≤ 100 g (half sine 6 ms, EN 60068-2-27) |
| Permanent Shock Resistance | ≤ 10 g (half sine 16 ms, EN 60068-2-29) |
| Vibration Resistance | ≤ 10 g (10 Hz - 1000 Hz, EN 60068-2-6) |
| Length | 71,2 mm (2.80") |
| Weight | 325 g (0.72 lb) |



POSITAL

FRABA

Electrical Connection

| | |
|------------------------|---------------------------|
| Connection Orientation | Axial |
| Connector | M12, Male, 8 pin, a coded |

Certification

| | |
|--------------------|---|
| Approval | CE + cULus listed, Industrial Control Equipment |
| Product Life Cycle | Established |



Connection Plan


| SIGNAL | PIN NUMBER |
|--------------|-------------------|
| Power Supply | 2 |
| GND | 1 |
| Data+ | 5 |
| Data- | 6 |
| Clock+ | 3 |
| Clock- | 4 |
| Preset | 7 |
| DIR | 8 |
| Shielding | Connector Housing |

Connector-View on Encoder
Rotation Clockwise (seen on shaft)



POSITAL

FRABA

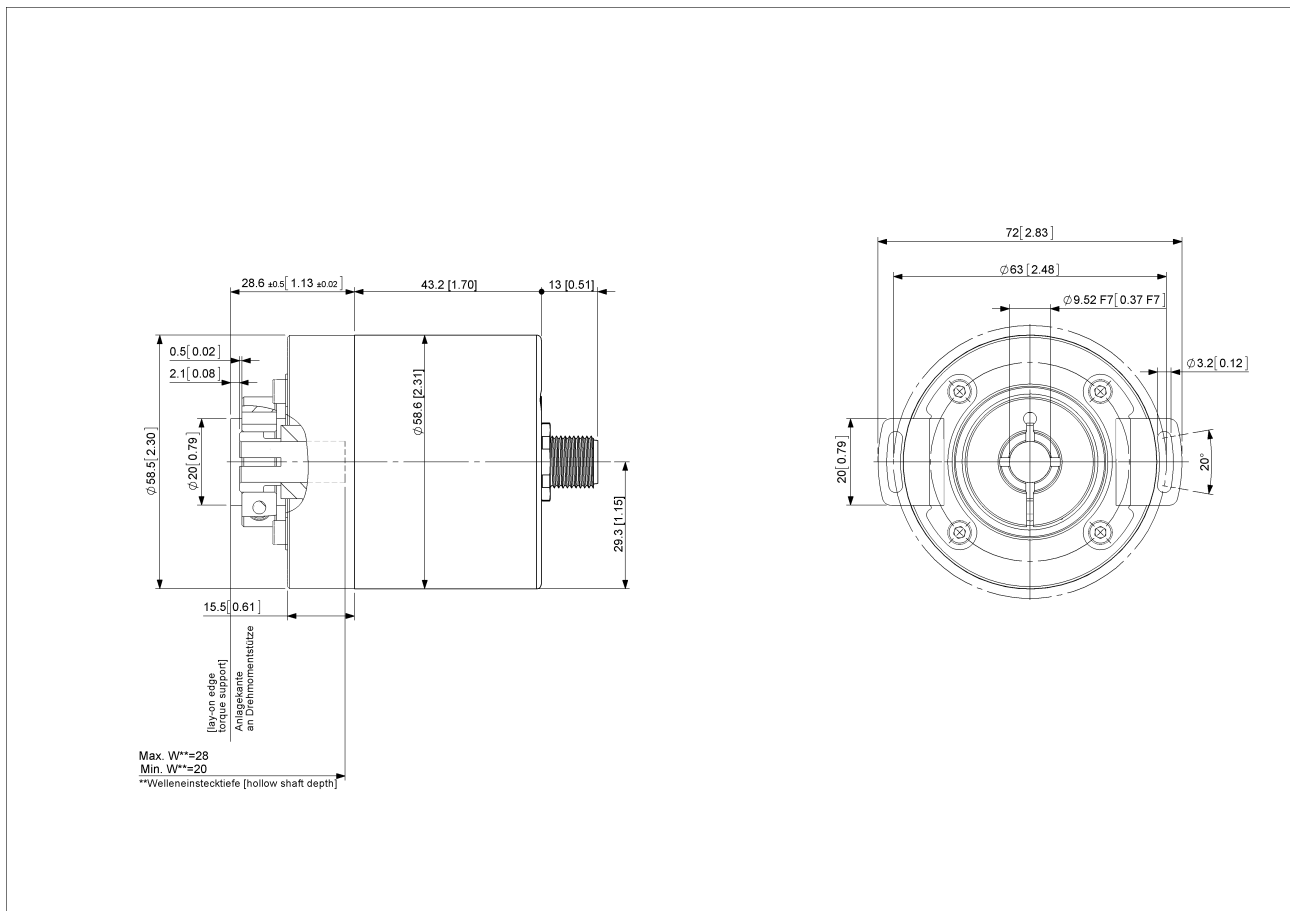

[2D Drawing](#)

Accessories

Connectors & Cables

- 5m PUR Cable, 8pin, A-Coded, f
- 10m PUR Cable, 8pin, A-Coded, f
- 2m PUR Cable, 8pin, A-Coded, f
- 10m PUR Cable, 8pin, A-Coded, f
- M12, 8pin A-Coded, Female
- More

Clamping Ring Hollow Shaft T120

Contact



POSITAL

FRABA



POSITAL
Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.