

ET 200pro EDSE/DSSE HF electronic DOL starter electronic (soft-) switching Full motor protection consisting of: electronic Overload protection + thermistor AC-3, 5.5 kW / 400 V 1.5 A...(9 A)12 A Brake contact 400 V AC 4 DI Han Q4/2 - Han Q8/0



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	direct starter
Product type designation	ET 200pro

General technical data	
Product function	
• on-site operation	Yes
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP65
Shock resistance	15g / 11 ms
Mechanical service life (switching cycles)	
• of the main contacts typical	30 000 000
Type of assignment	1
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A

Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
<b>Product function</b>	
• direct start	Yes
• reverse starting	No
<b>Product component Motor brake output</b>	Yes
<b>Product feature</b>	
• brake control with 230 V AC	No
• brake control with 400 V AC	Yes
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
<b>Type of voltage of the supply voltage for brake control required</b>	AC
<b>Supply voltage for brake control required</b>	400 V
<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	fuse
<b>Trip class</b>	Class 5, 10, 20 and 30 adjustable
<b>Maximum short-circuit current breaking capacity (Icu)</b>	
• at 400 V rated value	100 000 A

#### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	1 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %
<b>Failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Protection against electrical shock</b>	finger-safe

#### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Design of the switching contact</b>	solid-state / thyristor / 2 phases
<b>Adjustable pick-up value current of the current-dependent overload release</b>	1.5 ... 12 A
<b>Type of the motor protection</b>	full motor protection
<b>Type of voltage</b>	AC
<b>Operating voltage</b>	
• rated value	200 ... 400 V
<b>Operating range relative to the operating voltage at AC</b>	

<ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>	200 ... 440 V
<b>Operating current</b>	
<ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> </ul>	12 A
<ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>	12 A
<b>Operating power</b>	
<ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>	5 500 W

Inputs/ Outputs	
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• digital inputs parameterizable</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• digital outputs parameterizable</li> </ul>	No
<b>Number of digital inputs</b>	4
<b>Number of sockets</b>	
<ul style="list-style-type: none"> <li>• for digital output signals</li> </ul>	0
<ul style="list-style-type: none"> <li>• for digital input signals</li> </ul>	4

Supply voltage	
<b>Type of voltage of the supply voltage</b>	DC
<b>Supply voltage 1 at DC</b>	24 ... 24 V
<b>Supply voltage 1 at DC rated value</b>	
<ul style="list-style-type: none"> <li>• minimum permissible</li> </ul>	20.4 V
<ul style="list-style-type: none"> <li>• maximum permissible</li> </ul>	28.8 V

Control circuit/ Control	
<b>Type of voltage of the control supply voltage</b>	DC
<b>Control supply voltage at DC</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	20.4 ... 28.8 V
<b>Control supply voltage 1</b>	
<ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	20.4 ... 28.8 V
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	24 ... 24 V
<b>Power loss [W] in auxiliary and control circuit</b>	
<ul style="list-style-type: none"> <li>• in switching state OFF <ul style="list-style-type: none"> <li>— with bypass circuit</li> <li>— without bypass circuit</li> </ul> </li> </ul>	1.656 W 1.656 W
<ul style="list-style-type: none"> <li>• in switching state ON <ul style="list-style-type: none"> <li>— with bypass circuit</li> <li>— without bypass circuit</li> </ul> </li> </ul>	5.4 W 1.944 W

Installation/ mounting/ dimensions	
<b>Mounting position</b>	vertical, horizontal
<b>Mounting type</b>	screw fixing
<b>Height</b>	230 mm

<b>Width</b>	110 mm
<b>Depth</b>	160 mm
<b>Ambient conditions</b>	
<b>Installation altitude at height above sea level</b>	
• maximum	3 500 m
Relative humidity during operation	5 ... 95 %
<b>Communication/ Protocol</b>	
<b>Protocol is supported</b>	
• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
<b>Design of the interface</b>	
• PROFINET protocol	Yes
<b>Product function Bus communication</b>	Yes
<b>Protocol is supported</b>	
• AS-Interface protocol	No
<b>Product function</b>	
• supports PROFIenergy measured values	Yes
• supports PROFIenergy shutdown	Yes
<b>address range memory of address range</b>	
• of the inputs	2 byte
• of the outputs	2 byte
<b>Type of electrical connection</b>	
• of the communication interface	via backplane bus
<b>Connections/ Terminals</b>	
<b>Type of electrical connection</b>	
• 1 for digital input signals	M12 socket
• 2 for digital input signals	M12 socket
• 3 for digital input signals	M12 socket
• 4 for digital input signals	M12 socket
<b>Type of electrical connection</b>	
• at the manufacturer-specific device interface	optical interface
• for main energy infeed	socket according to ISO23570
• for load-side outgoing feeder	socket according to ISO23570
• for main energy transmission	socket according to ISO23570
• for supply voltage line-side	via backplane bus
• for supply voltage transmission	via backplane bus
<b>UL/CSA ratings</b>	
<b>Operating voltage</b>	
• at AC at 60 Hz acc. to CSA and UL rated value	480 V
<b>Certificates/ approvals</b>	

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



CCC



CSA



UL



RCM



EG-Konf.

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/sirius/catalogs](http://www.siemens.com/sirius/catalogs)

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RK1304-5LS70-2AA3>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1304-5LS70-2AA3>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS70-2AA3>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1304-5LS70-2AA3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1304-5LS70-2AA3&lang=en)

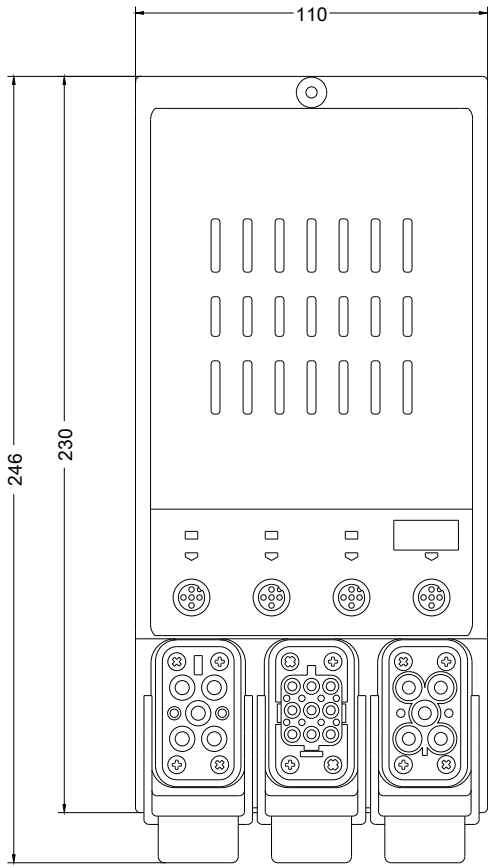

last modified:

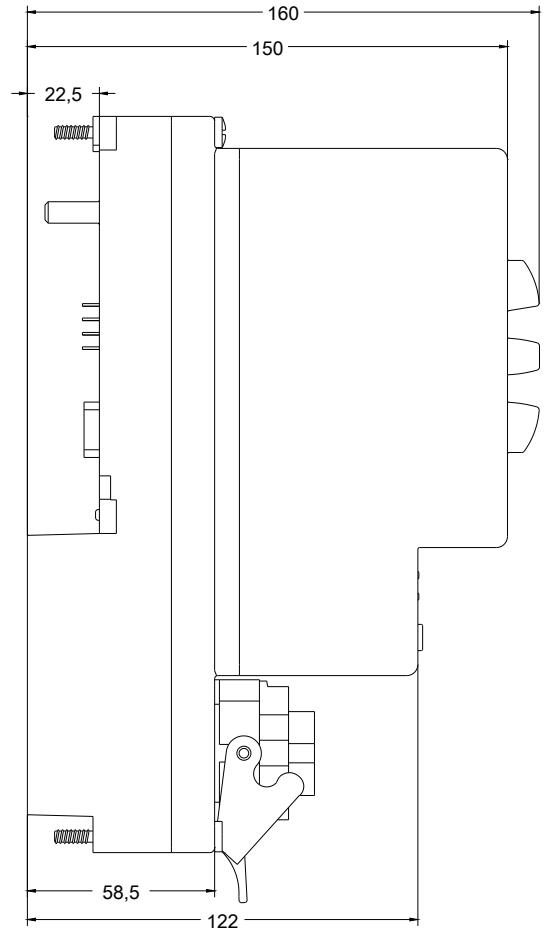

09/13/2019