DATASHEET - T0-2-92/I1



step switch for heating, T0, 20 A, surface mounting, 2 contact unit(s), Contacts: 3, 60 $^{\circ}$, maintained, With 0 (Off) position, 0-3, design no. 92



Part no. T0-2-92/I1 Catalog No. 222626



Similar to illustration

Similar to illustration			
Delivery program			
Product range			Control switches
Part group reference			ТО
Basic function			step switch for heating
			with black thumb grip and front plate
Contacts			3
Degree of Protection			IP65
			totally insulated
Design			surface mounting
Contact sequence			1 0 1 2 3 X X X X X X X X X X X X X X X X X X
Switching angle		0	60
Switching performance			maintained With 0 (Off) position
Design number			92
Front plate no.			FS 616
front plate			0-3
Motor rating AC-23A, 50 - 60 Hz			
400 V	P	kW	5.5
Rated uninterrupted current	l _u	Α	20
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Number of contact units		contact unit(s)	2

Technical data

General	
donorai	

Standards	IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30

Ambient temperature			
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U _{imp}	V AC	6000
Mechanical shock resistance		g	15
Mounting position			As required
Contacts			
Electrical characteristics			
Rated operational voltage	U _e	V AC	690
Rated uninterrupted current	lu	Α	20
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I _e	2
AB 40 % DF		x I _e	1.6
AB 60 % DF		x I _e	1.3
Short-circuit rating			
Fuse		A gG/gL	20
Rated short-time withstand current (1 s current)	I _{cw}	A _{rms}	320
Note on rated short-time withstand current lcw	CVV	11113	Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	6
Switching capacity	·d	Ю	
cos φ rated making capacity as per IEC 60947-3		Α	130
Rated breaking capacity cos ϕ to IEC 60947-3		Α	
230 V		Α	100
400/415 V		Α	110
500 V		Α	80
690 V		Α	60
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I _e		W	0.6
Current heat loss per auxiliary circuit at I _e (AC-15/230 V)		CO	0.6
Lifespan, mechanical	Operations	x 10 ⁶	> 0.4
Maximum operating frequency	Operations/h	X 10	1200
AC	Operations/ii		1200
AC-3			
Rating, motor load switch	P	kW	
220 V 230 V	P	kW	3
230 V Star-delta	P	kW	5.5
400 V 415 V	P	kW	5.5
400 V Star-delta	P	kW	7.5
500 V	P	kW	5.5
500 V 500 V Star-delta	P	kW	7.5
690 V	P	kW	4
690 V Star-delta	P	kW	5.5
Rated operational current motor load switch			
230 V	I _e	A	11.5
230 V star-delta	l _e	A	20
400V 415 V		A	11.5
	I _e		
400 V star-delta	l _e	A	20
500 V	l _e	Α	9
500 V star-delta	I _e	Α	15.6
690 V	le	Α	4.9
690 V star-delta	I _e	Α	8.5

Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	P	kW	3
400 V 415 V	P	kW	5.5
500 V	P	kW	7.5
690 V	Р	kW	5.5
Rated operational current motor load switch			
230 V	l _e	Α	13.3
400 V 415 V	l _e	Α	13.3
500 V	I _e	Α	13.3
690 V	I _e	Α	7.6
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	l _e	Α	10
Voltage per contact pair in series		V	60
DC-21A	I _e	Α	
Rated operational current	I _e	Α	1
Contacts		Quantity	
DC-23A, motor load switch L/R = 15 ms		Laurinty	
24 V			
Rated operational current	l _e	Α	10
Contacts		Quantity	
48 V		Quantity	
Rated operational current	I _e	Α	10
Contacts	G	Quantity	
60 V		Quantity	-
Rated operational current	I _e	Α	10
Contacts	·e	Quantity	
120 V		Quantity	
Rated operational current	I _e	Α	5
Contacts	-e	Quantity	
240 V		Quantity	
Rated operational current	I _e	Α	5
Contacts	·e	Quantity	
DC-13, Control switches L/R = 50 ms		Quantity	
Rated operational current	I _e	Α	10
Voltage per contact pair in series	•е	V	32
Control circuit reliability at 24 V DC, 10 mA	Fault	v H _F	
	probability	114	< 10 ⁻⁵ ,< 1 failure in 100,000 switching operations
Terminal capacities			
Solid or stranded		mm ²	1 x (1 - 2,5) 2 x (1 - 2,5)
Flexible with ferrules to DIN 46228		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Terminal screw			M3.5
Tightening torque for terminal screw		Nm	1
Fechnical safety parameters:			
Notes			B10 _d values as per EN ISO 13849-1, table C1
Rating data for approved types			
Terminal capacity			
Terminal screw			M3.5

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	20
Heat dissipation per pole, current-dependent	P _{vid}	W	0.6
Equipment heat dissipation, current-dependent	P_{vid}	W	0

Heat dissipation capacity Operating ambient temperature min. Operating ambient temperature max. IEC/EN 61439 design verification 10.2 Strength of materials and parts 10.2.2 Corrosion resistance 10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of tresistance of insulating materials to normal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections 10.8 Connections for external conductors Pdiss W 0 40 Weets the product standard's requirements. Meets the product standard's requirements. Meets the product standard's requirements. UV resistance only in connection with protective shield. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated. Some not apply, since the entire switchgear needs to be evaluated.	
Operating ambient temperature max. IEC/EN 61439 design verification 10.2 Strength of materials and parts 10.2.2 Corrosion resistance 10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections **C** 40 **A** **Meets the product standard's requirements. Meets the product standard's requirements. UV resistance only in connection with protective shield. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections	
IEC/EN 61439 design verification 10.2 Strength of materials and parts 10.2.2 Corrosion resistance 10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Meets the product standard's requirements. Meets the product standard's requirements. UV resistance only in connection with protective shield. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Incorporation of switching devices and components 10.7 Internal electrical circuits and connections	
10.2 Strength of materials and parts 10.2.2 Corrosion resistance 10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3.0 Egree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Meets the product standard's requirements. Weets the product standard's requirements witchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Incorporation of switching devices and components Is the panel builder's responsibility.	
10.2.2 Corrosion resistance 10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Meets the product standard's requirements. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated. Soes not apply, since the entire switchgear needs to be evaluated.	
10.2.3.1 Verification of thermal stability of enclosures 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Meets the product standard's requirements. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Is the panel builder's responsibility.	
10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation UV resistance only in connection with protective shield. 10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.6 Mechanical impact 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Is the panel builder's responsibility.	
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting 10.2.6 Mechanical impact 10.2.7 Inscriptions 10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. Is the panel builder's responsibility.	
and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation 10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.6 Mechanical impact 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. 10.4 Clearances and creepage distances Meets the product standard's requirements. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. Does not apply, since the entire switchgear needs to be evaluated. In the panel builder's responsibility.	
10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.6 Mechanical impact Does not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.2.6 Mechanical impact 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. Meets the product standard's requirements. Meets the product standard's requirements. Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.3 Degree of protection of ASSEMBLIES 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections Does not apply, since the entire switchgear needs to be evaluated. Is the panel builder's responsibility.	
10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.7 Internal electrical circuits and connections Is the panel builder's responsibility.	
10.8 Connections for external conductors Is the panel builder's responsibility.	
10.9 Insulation properties	
10.9.2 Power-frequency electric strength Is the panel builder's responsibility.	
10.9.3 Impulse withstand voltage Is the panel builder's responsibility.	
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility.	
10.10 Temperature rise The panel builder is responsible for the temperature rise calculation. Eat provide heat dissipation data for the devices.	n will
10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgea observed.	must be
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgea observed.	must be
10.13 Mechanical function The device meets the requirements, provided the information in the instribution leaflet (IL) is observed.	ction


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Control switch (EC002611)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch (ecl@ss10.0.1-27-37-14-14 [ACN998011])

provided the state of the state		
Type of switch		Level switch
Number of poles		1
Max. rated operation voltage Ue AC	V	690
Rated permanent current lu	А	20
Number of switch positions		4
With 0 (off) position		Yes
With retraction in 0-position		No
Device construction		Surface mounted device
Width in number of modular spacings		0
Suitable for ground mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Complete device in housing		Yes
Type of control element		Toggle
Front shield size		48x48 mm
Degree of protection (IP), front side		IP65
Degree of protection (NEMA), front side		Other

Dimensions

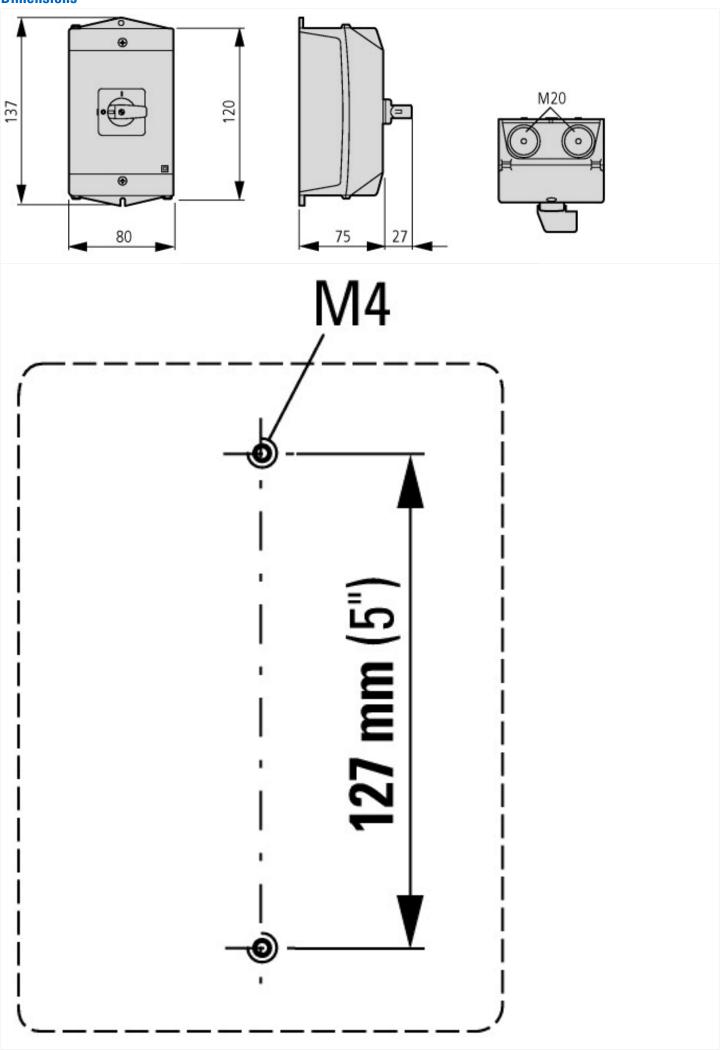

Drilling dimensions base