### DATASHEET - T0-1-8310/EZ



Step switches, T0, 20 A, centre mounting, 1 contact unit(s), Contacts: 2, 45 °, maintained, With 0 (Off) position, 0-2, design no. 8310

T0-1-8310/EZ

009775



Part no. Catalog No.

Padact range       Part goog reference	Delivery program			
Bais function Contacts Contacts Contacts Contacts Design Contacts Contacts Design Contacts Co				Control switches
Image: Note that the second of the second	Part group reference			ТО
Contacts       For PGC       For PGC         Degre of Protocion       For PGC       For PGC         Degre of Protocion       For PGC       For PGC         Degre of Protocion       For PGC       For PGC         Contacts       For PGC       For PGC         Contact sequence       For PGC       For PGC         Switching angle       For PGC       For PGC         Switching angle       For PGC       For PGC         Switching performance       For PGC       For PGC         Fort plate no.       For PGC       For PGC         Fort plate no.       For PGC       For PGC         Moor rating AC-23A, 50 - 60 Hz       For PGC       For PGC         Rot uniterrupted current 1,       For PGC       For PGC	Basic function			Step switches
Degree of Protection       Fort IPS         Design       Fort IPS         Contramouning       Fort IPS         Contract sequence       Fort IPS         Context sequence       Fort IPS         Switching angle       Fort IPS         Switching performance       Fort IPS         Design number       Fort IPS         Fort IPS       Fort IPS         Motor real Quantity       Fort IPS         Motor real Quanti				with black thumb grip and front plate
Design     Image: set in the	Contacts			2
Contact sequence       Image: Sequence       Image: Sequence       Image: Sequence         Contact sequence       Image: Sequence       Image: Sequence       Image: Sequence         Switching angle       Image: Sequence       Image: Sequence       Image: Sequence         Switching angle       Image: Sequence       Image: Sequence       Image: Sequence         Switching angle       Image: Sequence       Image: Sequence       Image: Sequence         Switching performance       Image: Sequence       Image: Sequence       Image: Sequence         Besign number       Image: Sequence       Image: Sequence       Image: Sequence         Font plate no.       Image: Sequence       Image: Sequence       Image: Sequence         Motor reating AC-22A, So - 60 Hz:       Image: Sequence       Image: Sequence       Image: Sequence         Motor reating AC-23A, So - 60 Hz:       Image: Sequence       Image: Sequence       Image: Sequence         Motor reating AC-23A, So - 60 Hz:       Image: Sequence       Image: Sequence       Image: Sequence         Motor reating AC-23A, So - 60 Hz:       Image: Sequence       Image: Sequence       Image: Sequence         Mov       N       N       Sequence       Image: Sequence         Mov       N       N       Sequence       Image: Sequence <td>Degree of Protection</td> <td></td> <td></td> <td>Front IP65</td>	Degree of Protection			Front IP65
Switching angle       •       45         Switching performance       •       45         Dasign number       •       8310         Front plate no.       •       •         Motor rating AC-23A, 50 - 60 Hz       •       •         40V       P       KV         Red uninterrupted current 1 <sub>u</sub> P       KV         Notor netud uninterrupted current 1 <sub>u</sub> I       21	Design			centre mounting
Switching angle       •       45         Switching performance       •       45         Design number       •       45         Front plate no.       •       45         Motor rating AC-23A, 50 - 60 Hz       •       60         40 V       P       KV         Rated uninterrupted current 1 <sub>u</sub> I       A         Note on rated uninterrupted current 1 <sub>u</sub> I       A				
Switching performance       minitained         Design number       310         Front plate no.       Image: I	Contact sequence			
Design number         With 0 (Off) position           Font plate no.         8310           font plate no.              1             2	Switching angle		0	45
Front plate no.       Image: Ima	Switching performance			
fort plate       1       0       0         Motor rating AC-23A, 50 - 60 Hz       6       0.2         400 V       P       KW       5.5         Rated uninterrupted current 1       1       0       A00         Note on rated uninterrupted current 1       1       0       A00         Note on rated uninterrupted current 1       1       1       0	Design number			8310
Front plate     Front plate     Front plate     Front plate     Front plate     Point     Point     Point     Point     Point     Point     Point     State     Stat	Front plate no.			FS 418
Motor rating AC-23A, 50 - 60 Hz     Image: Constraint of the second	front plate			
400 VPkW5.5Rated uninterrupted currentIA20Note on rated uninterrupted current IIIRated uninterrupted current I				V <sup>-</sup> 2
Rated uninterrupted current     Iu     A     20       Note on rated uninterrupted current Iu     Iu     Iu     Iu		D	L\\/	
Note on rated uninterrupted current !u Rated uninterrupted current lu is specified for max. cross-section.				
		I <sub>U</sub>	A	
Number of contact units				
unit(s)	Number of contact units		contact unit(s)	1

## Technical data

General		
Standards		IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		
Open	°C	-25 - +50

<b>-</b>			
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			111/3
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Mechanical shock resistance		g	15
Mounting position			As required
Contacts Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	l <sub>u</sub>	A	20
Note on rated uninterrupted current !u	'u	~	Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.
Load rating with intermittent operation, class 12 AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF			1.6
		x l <sub>e</sub>	
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating		A = C / = l	20
Fuse		A gG/gL	
Rated short-time withstand current (1 s current)	l <sub>cw</sub>	A <sub>rms</sub>	320
Note on rated short-time withstand current lcw Rated conditional short-circuit current		LA.	Current for a time of 1 second
	Ι <sub>q</sub>	kA	6
Switching capacity cos φ rated making capacity as per IEC 60947-3		A	130
Rated breaking capacity cos φ to IEC 60947-3		A	
230 V		A	100
400/415 V		A	110
500 V		A	80
690 V		A	60
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at le		W	0.6
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		C0	0.6
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.4
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	Р	kW	3
230 V Star-delta	Р	kW	5.5
400 V 415 V	Р	kW	5.5
400 V Star-delta	Р	kW	7.5
500 V	Р	kW	5.5
500 V Star-delta	Р	kW	7.5
690 V	Р	kW	4
690 V Star-delta	Р	kW	5.5
Rated operational current motor load switch			
230 V	le	А	11.5
230 V star-delta	le	А	20
400V 415 V	l <sub>e</sub>	А	11.5
400 V star-delta	l <sub>e</sub>	А	20
500 V	I <sub>e</sub>	А	9
500 V star-delta	l <sub>e</sub>	А	15.6
690 V	l <sub>e</sub>	A	4.9
690 V star-delta	le	A	8.5
AC-23A			

200.1/	D	134/	
230 V	P	kW	3
400 V 415 V	Р	kW	5.5
500 V	P	kW	7.5
690 V	P	kW	5.5
Rated operational current motor load switch			
230 V	le	А	13.3
400 V 415 V	Ie	А	13.3
500 V	le	A	13.3
690 V	le	A	7.6
DC	-		
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I <sub>e</sub>	A	10
	'e		
Voltage per contact pair in series		V	60
DC-21A	le	A	
Rated operational current	le	A	1
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	Ie	А	10
Contacts		Quantity	1
48 V			
Rated operational current	le	A	10
Contacts	-	Quantity	2
60 V		addinity)	
Rated operational current		A	10
	l <sub>e</sub>		
Contacts		Quantity	3
120 V			
Rated operational current	l <sub>e</sub>	A	5
Contacts		Quantity	3
240 V			
Rated operational current	Ι <sub>e</sub>	А	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms			
Rated operational current	le	A	10
Voltage per contact pair in series		V	32
Control circuit reliability at 24 V DC, 10 mA	Fault	H <sub>F</sub>	< 10 <sup>-5</sup> ,< 1 failure in 100,000 switching operations
	probability		
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 x (1 - 2,5) 2 x (1 - 2,5)
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x (0.75 - 2.5)
		IIIIN	2 x (0.75 - 2.5)
Terminal screw			M3.5
Tightening torque for terminal screw		Nm	1
Technical safety parameters:			
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	600
Rated uninterrupted current max.			
Main conducting paths			
General use		A	16
Auxiliary contacts			
General Use	IU	A	10
Pilot Duty	ů do na se		A 600
, not buy			P 300

Switching capacity		
Maximum motor rating		
Single-phase		
120 V AC	HP	0.5
200 V AC	HP	1
240 V AC	HP	1.5
Three-phase		
200 V AC	HP	3
240 V AC	HP	3
480 V AC	HP	7.5
600 V AC	HP	7.5
Short Circuit Current Rating	SCCR	
Basic Rating	kA	5
max. Fuse	А	50
High fault rating	kA	10
max. Fuse	А	20, Class J
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	18 - 14
Terminal screw		M3.5
Tightening torque	lb-in	8.8

# Design verification as per IEC/EN 61439

besign vermeation as per indy into the			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	А	20
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0.6
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Control switch (EC002611)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch (ecl@ss10.0.1-27-37-14-14	
[ACN998011])	

Type of switch			Level switch
Number of poles			1
Max. rated operation voltage Ue AC	V	/	690
Rated permanent current lu	А	4	20
Number of switch positions			3
With 0 (off) position			Yes
With retraction in 0-position			No
Device construction			Built-in device
Width in number of modular spacings			0
Suitable for ground mounting			No
Suitable for front mounting 4-hole			Yes
Suitable for distribution board installation			No
Suitable for intermediate mounting			No
Complete device in housing			No
Type of control element			Toggle
Front shield size			48x48 mm
Degree of protection (IP), front side			IP65
Degree of protection (NEMA), front side			12

#### **Approvals**

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

#### **Dimensions**

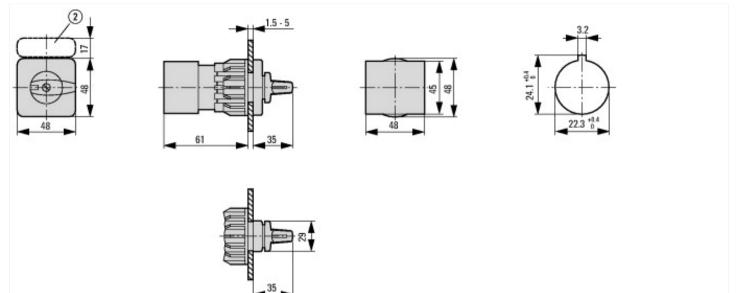

(2) ZFS-... Label mount not included as standard