


Data Sheet

IP68 waterproof Plug enclosure Adapter, straight

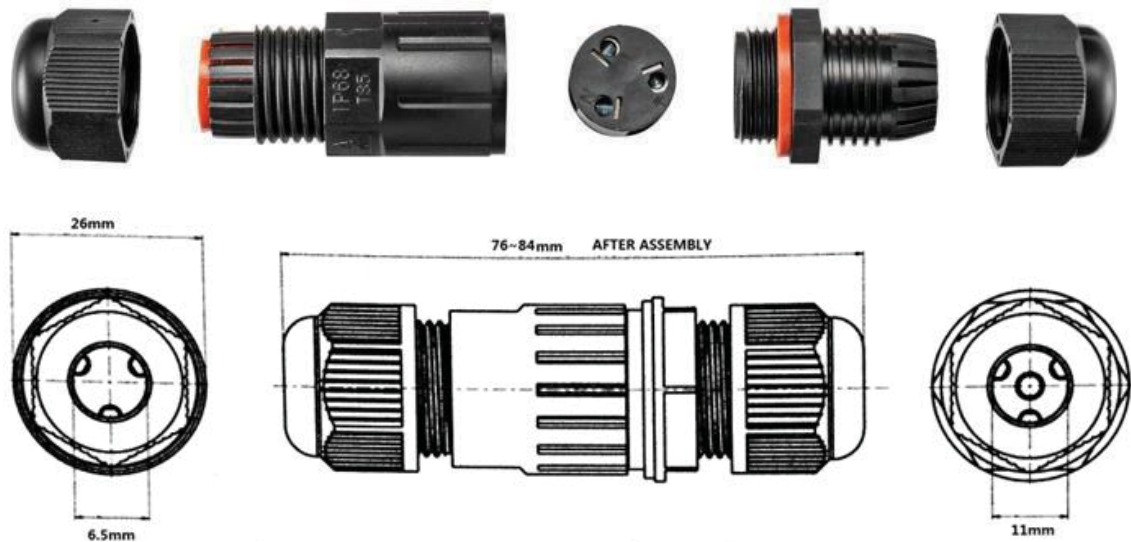

Technical data

Colour: Black

Housing material: body nylon PA66
contacts-brass
sealer adopt silicon

Rated operation voltage: 250V/AC

Rated current: Max. 16A

Operation Temperature: -20°C~+85°C

Storage temperature: -40°C~ +85°C

Cross section: 0.5~1.5mm²

OD range: 6.5~11 mm

Cable strip length: 6 mm

Termination: Screw

IP protection: IP68


Data Sheet



- 1. Sleeve
- 2. Mounting adapter
- 3. Screw terminal
- 4. Housing

Connection and installation

1. Disconnect the cables before working on the product, disconnect the fuse and secure it against being switched on again.
2. Ensure that there is no voltage before working on the product and check this.
3. Unscrew the product parts for assembly.
4. Strip the power cables to be connected.

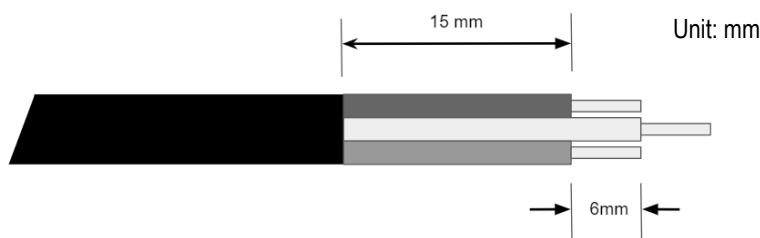

PE wire should be at least 6 mm longer so that it is the last to remain in the terminal in the event of a fault

5. Slide a sleeve on each mounting side and, if present, the mounting adapter in the correct orientation over the power cords.
6. Connect the yellow-green protective conductor on the input and output side to the cable clamp through the screw terminals.
7. Connect the other two conductors on the input and output side of the screw terminal through the screw terminals.
8. Firmly screw the product parts together to ensure contact and water protection.
9. Check the correct implementation and installation.
10. Turn the fuse back on.