DATASHEET - P3-100/I5/SVB



Main switch, P3, 100 A, surface mounting, 3 pole, Emergency switching off function, With red rotary handle and yellow locking ring, Lockable in the 0 (Off) position



P3-100/I5/SVB Part no. ${\bf Catalog\ No.}$ 207373

EL-Nummer (Norway)	0001457891			
Delivery program				
Product range				Main switch maintenance switch Repair switch
Part group reference				P3
Stop Function				Emergency switching off function
				With red rotary handle and yellow locking ring
Information about equipment supplied				Auxiliary contact or neutral conductor fitted by user.
Number of poles				3 pole
Auxiliary contacts				
		N	N/O	0
7		N	N/C	0
Locking facility				Lockable in the 0 (Off) position
Degree of Protection				IP65
				totally insulated
Design				surface mounting
Contact sequence				L1 L2 L3 $ \begin{array}{ccccccccccccccccccccccccccccccccccc$
Switching angle		0	•	90
Function				OFF OFF
Motor rating AC-23A, 50 - 60 Hz				
Motor rating AC-23A, 50 - 60 Hz 400 V	P	k	(W	55
	P I _u			55 100

500 V

690 V

Technical data			
General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U _{imp}	V AC	6000
Mechanical shock resistance	·	g	15
Mounting position			As required
Contacts			
Mechanical variables			
Number of poles			3 pole
Auxiliary contacts			
		N/0	0
		N/C	0
Electrical characteristics			
Rated operational voltage	U _e	V AC	690
Rated uninterrupted current	Iu	Α	100
Note on rated uninterrupted current !u			Rated uninterrupted current I_u is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I _e	2
AB 40 % DF			
		x l _e	1.6
AB 60 % DF		x l _e	1.3
Short-circuit rating			
Fuse		A gG/gL	
Rated short-time withstand current (1 s current)	I _{cw}	A _{rms}	2000
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	4
Switching capacity cos φ rated making capacity as per IEC 60947-3		۸	950
Rated breaking capacity cos ϕ to IEC 60947-3		A	330
		A	700
230 V 400/415 V		A	760
·		A	740
500 V		A	880
690 V Safe isolation to EN 61140		Α	520
between the contacts		V AC	440
		W	7.5
Current heat loss per contact at I _e	0		
Lifespan, mechanical	Operations	x 10 ⁶	> 0.1
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	P	kW	22
400 V 415 V	P	kW	37
500 V	P	kW	45
690 V	P	kW	37
Rated operational current motor load switch			
230 V	l _e	Α	71
400V 415 V	I _e	Α	71

Α

Α

65

23.8

l_e

AC-23A	
230 V	
400 V 415 V P	
SOU P	
Rated operational current motor load switch	
Rated operational current motor load switch 230 V 1e A 100 400 V 415 V 1e A 96 690 V 1e A 68 DC DC-1, Load-break switches L/R = 1 ms Rated operational current 1e A 100 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
10	
A 100 500 V Ie	
500 V 690 V 1e A 96 DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Quantity 1 Asted operational current Ie A 50 Contacts Quantity 1 Asted operational current Ie A 50 Contacts Quantity 1 Asted operational current Ie A 50 Contacts Quantity 1 Asted operational current Ie A 50 Contacts Quantity 2	
Book of the search of the sear	
DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts As V Rated operational current Ie A 50 Contacts As So Contacts Quantity 2 Rated operational current Ie A 50	
DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Rated operational current Ie A 50 Rated operational current Ie A 50 Contacts Quantity 2 Rated operational current Ie A 50	
DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Quantity 2 Rated operational current Rated operational current Ie A 50	
Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50	
Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current I _e A 50 Contacts Quantity Rated operational current I _e A 50 Contacts Quantity Rated operational current I _e A 50 Contacts A 50 Contacts Quantity Rated operational current I _e A 50 Contacts Quantity A 50	
DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Quantity 1 48 V Rated operational current Ie A 50 Contacts Quantity 2 60 V Rated operational current Ie A 50	
24 V Rated operational current Ie A 50 Contacts Quantity 48 V Rated operational current Ie A 50 Contacts Quantity Rated operational current Ie A 50 Contacts Quantity 2 Rated operational current Ie A 50 Rated operational current Ie A 50	
Rated operational current Contacts Rated operational current Rated operational current Ie A 50 Cuantity Rated operational current Ie A 50 Cuantity 2 60 V Rated operational current Ie A 50	
Contacts 48 V Rated operational current Contacts Contacts Contacts Quantity 1 Quantity 2 60 V Rated operational current I _e A 50	
A8 V Rated operational current I _e A 50 Contacts Quantity 60 V Rated operational current I _e A 50	
Rated operational current Contacts Quantity Rated operational current Ie A 50 Quantity 2	
Contacts Guantity Rated operational current Quantity 2	
Rated operational current I _e A 50	
Rated operational current I _e A 50	
Contacto Edurate	
120 V	
Contacts Quantity 3	
Control circuit reliability at 24 V DC, 10 mA Fault H_F $< 10^{-5}$, < 1 failure in 100,000 switching operations	
Terminal capacities	
Solid or stranded mm ² 1 x (2,5 - 35)	
2 x (2,5 - 10)	
Flexible with ferrules to DIN 46228 mm ² 1 x (1.5 - 25) 2 x (1.5 - 6)	
Terminal screw M5	
Tightening torque for terminal screw Nm 3	
Technical safety parameters:	
Notes B10 _d values as per EN ISO 13849-1, table C1	
Rating data for approved types	
Contacts	
Rated operational voltage U _e V AC 600	
Rated uninterrupted current max.	
Main conducting paths	
General use A 100	
Notes If used with neutral conductor: I _U = max. 90 A	
Auxiliary contacts	
General Use I _U A 10	
Pilot Duty A 600 P 600	
Switching capacity	
Maximum motor rating	
Single-phase	
120 V AC HP 5	
200 V AC HP 10	
240 V AC HP 15	
Three-phase	

200 V AC	HP	20
240 V AC	HP	25
480 V AC	HP	60
600 V AC	HP	75
Short Circuit Current Rating	SCCR	
Basic Rating	kA	10
max. Fuse	Α	150
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	14 - 2
Terminal screw		M5
Tightening torque	lb-in	26.5

Design verification as per IEC/EN 61439

200:g.: 10::::00 po: :20,2:: 0: :00			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	100
Heat dissipation per pole, current-dependent	P_{vid}	W	7.5
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:specification}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])


Version as main switch	Yes	
Version as maintenance-/service switch	Yes	


Version as safety switch		Yes
Version as emergency stop installation		Yes
Version as reversing switch		No
Number of switches		1
Max. rated operation voltage Ue AC	V	690
Rated operating voltage	V	690 - 690
Rated permanent current lu	Α	100
Rated permanent current at AC-23, 400 V	Α	100
Rated permanent current at AC-21, 400 V	Α	100
Rated operation power at AC-3, 400 V	kW	37
Rated short-time withstand current lcw	kA	2
Rated operation power at AC-23, 400 V	kW	55
Switching power at 400 V	kW	55
Conditioned rated short-circuit current Iq	kA	4
Number of poles		3
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Motor drive optional		No
Motor drive integrated		No
Voltage release optional		No
Device construction		Complete device in housing
Suitable for ground mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for front mounting centre		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Colour control element		Red
Type of control element		Door coupling rotary drive
Interlockable		Yes
Type of electrical connection of main circuit		Screw connection
Degree of protection (IP), front side		IP65
Degree of protection (NEMA)		Other

Approvals

North America Certification	For UL/CSA certification order article number 255903
-----------------------------	--

Dimensions

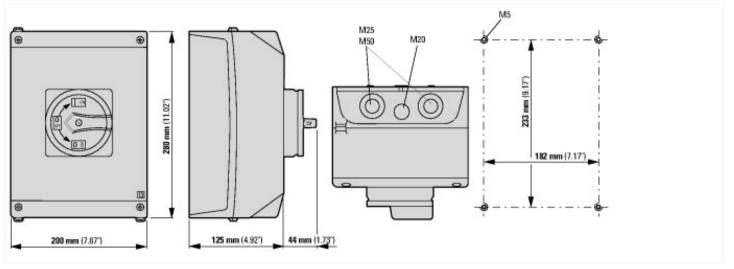

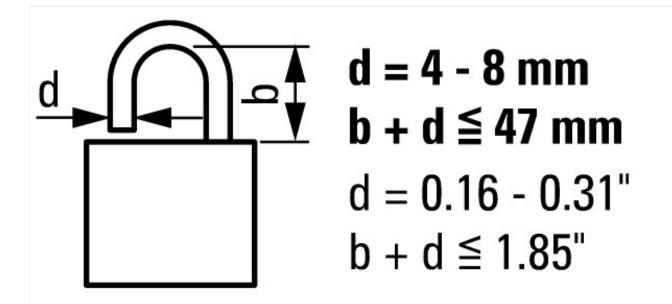

≦3 padlocks