



TE Internal #: 5227716-3
RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 50 Ω, Bayonet, 4GHz Operating Frequency
[View on TE.com >](#)

Connectors > RF Coax Connectors > RF Connectors



RF Interface: **BNC**
RF Connector Style: **Jack**
RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Bayonet**

Features

Product Type Features

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Body Insulation	Without
Cable Connector Orientation	Straight
Body Material	Zinc
Body Plating Material	Nickel

Contact Features

RF Connector Center Contact Underplating Material	Nickel
	762 μin



RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Phosphor Bronze

Termination Features

Termination Method to Wire & Cable	Solder Terminal
------------------------------------	-----------------

Mechanical Attachment

Panel Attachment Style	Front Mount
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Mechanical
Detent	With

Dimensions

Panel Thickness (Recommended)	1.17 – 3.18 mm[.046 – .125 in]
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Operating Frequency	4 GHz
---------------------	-------

Packaging Features

Packaging Method	Carton
------------------	--------

Other

Grade	Commercial
Comment	Includes solder terminal and jam nut
Dielectric Material	Fluoropolymer

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211)



SVHC > Threshold:
Pb (3.7% in Component Part)

Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.



Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-076-BNCJKISG50 BNC RF Connector: Male (Jack) Assembly, Isolated Ground Protection, 50 Ohm	 TE Part # CAT-076-BNCVTBAY BNC Vertical Male (Jack) RF Connector, 50 Ohm, Bayonet Coupling Mechanism	 TE Part # CAT-076-BNCRABAY BNC Right Angle M Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism	 TE Part # CAT-076-BNCJKSH50 BNC RF Connector: Male (Jack) assembly - short, 50 Ohm, 4Ghz
 TE Part # 1-1337543-0 BNC Ins R/A PCB Skt 50Ohm White	 TE Part # 1-1337494-0 BNC R/A Shld PCB Skt 50Ohm Nickel Pltd	 TE Part # 2-5221128-1 PLUG,COMMERCIAL BNC	 TE Part # 1-1634612-0 BNC Ins R/A PCB Skt 50Ohm Black



TE Part # 5-1634500-2
BNC Str Plg Hex 50Ohm Nickel Pltd RG58C/

TE Part # 5-1634503-1
BNC Str PCB Skt 50Ohm Nickel Pltd

TE Part # 5413959-1
PLUG RTANG BNC HEX 50 OHM

TE Part # 5413959-3
BNC HEX RT ANG PLUG 50 OHM

TE Part # 5-1634556-0
BNC LP ELBOW B/HEAD PCB SKT 50 OHMS 6.15

TE Part # 5413589-7
KIT,PLUG,COML BNC,HEX CRP

TE Part # 5413515-2
JACK,DECOUPLER,RTANG,BNC PCB

TE Part # 5413515-9
JACK,DECOUPLER,RTANG,BNC PCB

TE Part # 330876
BNC PLUG

TE Part # 6274315-1
BNC JACK, NONSWITCHING

TE Part # 1-221128-0
PLUG,COMMERCIAL BNC

TE Part # 2-5221128-3
PLUG,COMMERCIAL BNC

Customers Also Bought

TE Part #1-6609113-3
CORCOM C SERIES MULTI-FUNCTION INLET FIL

TE Part #1623746-3
ER74 10R 5% AMMO PK

TE Part #1055047-1
2087 1230 02

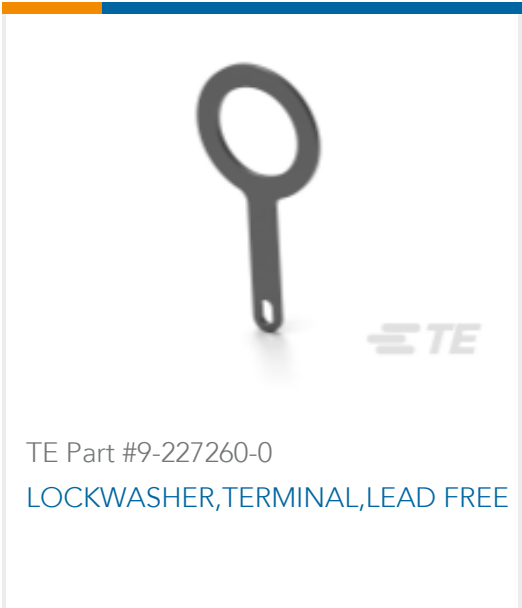
TE Part #1057290-1
3052 1201 10,N SERIES FM PLUG

TE Part #1571083-2
PRASC1-16F-BBR00=POWER ROCKER

TE Part #1623720-2
CCR2 10K 10%

TE Part #1478763-9
METAL BACKSHELL 9 WAY 45 DE

TE Part #1-794231-0
MINI UMNL2 SCKT 20-16AWG LP A



TE Part #9-227260-0
LOCKWASHER,TERMINAL,LEAD FREE



TE Part #1-1478763-5
METAL BACKSHELL 15 WAY 45 DE

Documents

Product Drawings

BNC SOLDER RECEPT JACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5227716-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5227716-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5227716-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BNC Connectors

English