


## Data sheet

### Article Description

#### Line Intermediate Dimmer Type 8113 for hand and foot operation

- Integrated protective conductor terminal possible
- Applicable as intermediate and end device due to different connection opportunities
- **Hum free**
- With integrated orientation light

suitable for:	LV-halogen lamps (with electronic transformer) HV-halogen lamps, incandescent lamps
Rated voltage:	230 V ~ (+/- 10 %), 50 Hz,
<b>Rated power:</b>	<b>20-300 W/VA</b>
Operating principle:	trailing edge
Dimensions:	LWH 130 x 59 x 35 mm
Function:	on/off via separate switch, dimming via slide switch
Cut-off:	complete cut-off
Stand-by consumption:	< 0,5 W (due to orientation light)
Max. cord diameter Ø:	6,5 mm
Temperature protection:	thermal fuse
Overload-/short-circuit-protection:	fuse 5x20 mm T2AH/250 V
Cycle of operation:	> 50.000
Protection class:	2
Safety class:	IP20
Connection:	screw terminal 0,5-1,5 mm <sup>2</sup> (flexible)


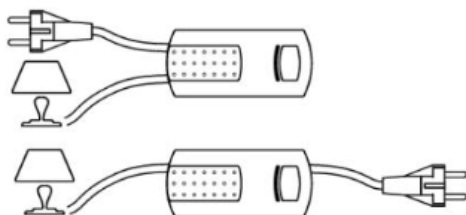


inter BÄR-No.	Colour
8113-100	transparent
8113-104	black
8113-108	white

### Article Description



### Connection diagram

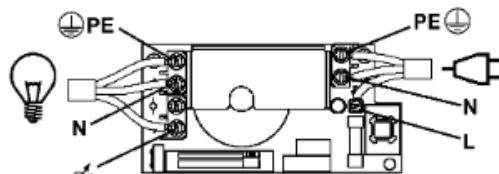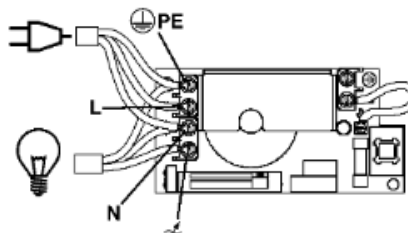

Technical modifications reserved!

Works at 230 V-mains must only be carried out by a specialist!