## Release date: 2020-12-10 Date of issue: 2020-12-10 Filename: 199806\_eng.pdf

### The state of the s

### Diffuse mode sensor GLK18-8-200-S/25/161/166



- Short design in M18 plastic housing
- Sidelookerversion
- 4 LEDs indicator for 360° visibility
- Optimal price/power ratio
- Optimized potentiometer design for a clear control button layout in the application
- Universal usage at different power supplies

Diffuse mode sensor, M18 threaded housing design, plastic housing, side optical face, 200 mm detection range, red light, light on, AC/DC version, NPN-FET output, micro plug













### **Function**

The GLV/GLK18 series sensors help improve the efficiency of machines and systems. The design of the M18 plastic housing, the connection technology, and sensor properties are highly standardized. Concentrating on the key sensor requirements has produced a robust and reliable product series for DC and AC/DC voltage systems without any over-engineering. The mounting set included in the scope of delivery and the optimized potentiometer design ensure fast assembly and easy configuration.

### **Dimensions**

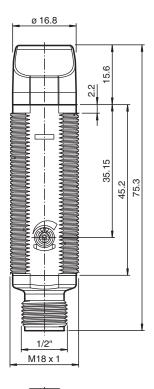



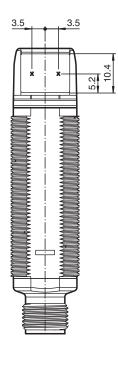




### Technical Data **General specifications** 50 ... 200 mm adjustable **Detection range** 0 ... 200 mm Detection range max. 100 mm x 100 mm Kodak white Reference target Light source modulated visible red light, 640 nm Light type Diameter of the light spot approx. 15 mm at 200 mm Angle of divergence approx. 4° Optical face lateral Ambient light limit 30000 Lux; according to EN 60947-5-2:2007 Hysteresis Н < 15 % Accessories provided Mounting aids Indicators/operating means Operation indicator LED green, statically lit Power on Function indicator LED yellow: lights when object is detected; flashes when falling short of the stability control Control elements sensitivity adjustment **Electrical specifications** Operating voltage $U_B$ 20 ... 250 V AC/DC No-load supply current $I_0$ $< 2.5 \, \text{mA}$ Output Switching type light-on Signal output N-channel MOSFET, short circuit protected max. 250 V AC/DC Switching voltage Switching current max. 200 mA ≤ 3.5 V AC/DC Voltage drop $U_{\text{d}}$ Switching frequency 50 Hz ≤ 10 ms Response time Conformity Product standard EN 60947-5-2 Compliance with standards and directives Standard conformity Standards UL 508 Approvals and certificates EAC conformity TR CU 020/2011 TR CU 004/2011 II, rated insulation voltage $\leq$ 250 V AC with pollution degree 1-2 according to IEC 60664-1 Protection class **UL** approval cULus Listed, Type 1 enclosure CCC approval Certified by China Compulsory Certification (CCC) Approvals **Ambient conditions** Ambient temperature -20 ... 60 °C (-4 ... 140 °F) -40 ... 70 °C (-40 ... 158 °F) Storage temperature Mechanical specifications Degree of protection IP67 Connection Micro AC connector, 1/2" V124; 4-pin Material PC-PBT Housing Optical face **PMMA** Mass approx. 10 g



### **Connection Assignment**

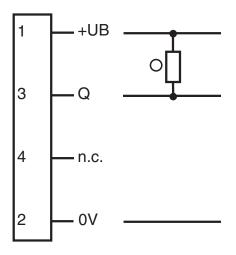

- O = Light on
- = Dark on


### **Connection Assignment**




### Wire colors


RD/BK (red/black) 2 RD/WH (red/white) RD (red) GN (green)


### **Assembly**



1	Operating display	green
2	Signal display	yellow
3	Sensitivity adjustment	
4	Emitter	
5	Receiver	

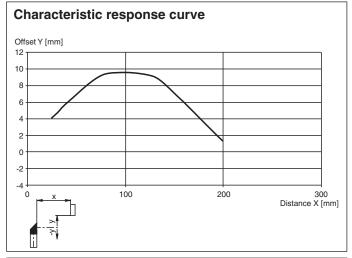

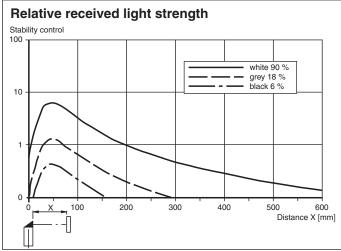

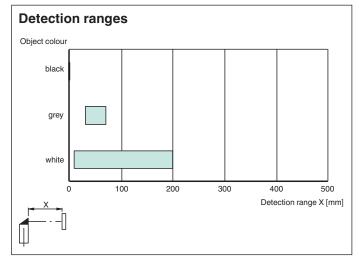

# Accessories CPZ18B03 Mounting Bracket with swivel nut BF 18 Mounting flange, 18 mm BF 18-F Plastic mounting adapter, 18 mm BF 5-30 Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm V124-G-YE2M-PVC Connecting cable, 1/2" - 20 UNF, 4-pin, PVC cable V124-W-YE2M-PVC Connecting cable, 1/2" - 20 UNF, 4-pin, PVC cable

Other suitable accessories can be found at www.pepperl-fuchs.com

### **Application**

### Packaging industry:

- Presence checks, track loading, completeness checks, stack height control Material handling
- · Presence checks, target sensor, profile checks, trigger sensor

### Automatic doors, gates and access systems, elevator:

- Secure detection for automatic door and gate systems
- Monitoring function in turnstiles
- · Closing edge monitoring in elevators