## 3VA2125-0MN32-0AA0

**Data sheet** 



circuit breaker 3VA2 IEC frame 160 breaking capacity class E Icu=200 kA @ 415 V 3-pole motor protection ETU350M, LSI, In=25A overload protection Ir=10A ... 25A short circuit protection Isd=3...15xIr, Ii=15xIn busbar connection

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Motor protection
design of the overcurrent release	ETU350M
protection function of the overcurrent release	LSI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
operating power / at AC-3 / at 400 V	11 000 W
operating power / at AC-3 / at 230 V	5 500 W
power loss [W] / maximum	0.5 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	0.17 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	14 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	9 800
electrical endurance (operating cycles) / at AC-3 / at 380/415 V	10 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
<ul> <li>communication function</li> </ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
<ul> <li>other measurement function</li> </ul>	No
Net Weight	2.5 kg
Current	
operational current	
• at 40 °C	25 A
• at 45 °C	25 A
● at 50 °C	25 A
● at 55 °C	25 A
• at 60 °C	25 A
● at 65 °C	25 A
● at 70 °C	25 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	E
maximum short-circuit current breaking capacity (Icu)	
• at 415 V	200 kA
● at 690 V	85 kA

operating short-circuit current breaking capacity (lcs)	
• at 415 V	200 kA
● at 690 V	65 kA
short-circuit current making capacity (Icm)	
• at 415 V	440 kA
● at 690 V	187 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	10 A
• maximum	25 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	4 s
• maximum	17 s
adjustable response value setting current (lsd) / of S-trip / with l0t characteristic	
• minimum	75 A
• maximum	375 A
adjustable response value delay time (tsd) / for S-tripping / with l0t characteristic	
• minimum	0.03 s
maximum	0.03 s
adjustable response value setting current (li) / for l-tripping	
• minimum	375 A
• maximum	375 A
adjustable absolute value setting current (InN) / for N-tripping	
• minimum	0 A
maximum	0 A
product function / grounding protection	No
adjustable trip class (Tc CLASS)	10A, 10E, 20E
tripping time (Tp) / with adjustable trip class (Tc CLASS)	
• minimum	4 s
• maximum	17 s
Mechanical Design	
product component	
undervoltage release	No
<ul> <li>voltage trigger</li> </ul>	No
voltage trigger	NO
voltage trigger     trip indicator	No
• trip indicator	No
trip indicator  height [in]	No 7.13 in
trip indicator     height [in] height	No 7.13 in 181 mm
trip indicator height [in] height width [in]	No 7.13 in 181 mm 4.13 in
trip indicator height [in] height width [in] width	No 7.13 in 181 mm 4.13 in 105 mm
trip indicator height [in] height width [in] width depth [in]	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in
trip indicator     height [in]     height     width [in]     width     depth [in]     depth  Connections	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in
trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm
trip indicator     height [in]     height     width [in]     width     depth [in]     depth  Connections	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm
trip indicator     height [in]     height     width [in]     width     depth [in]     depth  Connections     arrangement of electrical connectors / for main current circuit     type of electrical connection / for main current circuit     type of connectable conductor cross-sections / for flat-bar	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit
trip indicator     height [in]     height     width [in]     width     depth [in]     depth  Connections  arrangement of electrical connectors / for main current circuit     type of electrical connection / for main current circuit     type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm
trip indicator     height [in]     height     width [in]     width     depth [in]     depth  Connections  arrangement of electrical connectors / for main current circuit     type of electrical connection / for main current circuit     type of connectable conductor cross-sections / for flat-bar terminal connection / minimum     type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm  25 x 8 mm
• trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm  25 x 8 mm  tin
• trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm  25 x 8 mm  tin
• trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm  tin
• trip indicator height [in] height width [in] width depth [in] depth  Connections  arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit number of CO contacts / for auxiliary contacts	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm  tin
trip indicator     height [in]     height     width [in]     width     depth [in]     depth      Connections     arrangement of electrical connectors / for main current circuit     type of electrical connection / for main current circuit     type of connectable conductor cross-sections / for flat-bar terminal connection / minimum     type of connectable conductor cross-sections / for flat-bar terminal connection / maximum     design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)     design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit     number of CO contacts / for auxiliary contacts  Accessories	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm  tin  tin
• trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit number of CO contacts / for auxiliary contacts  Accessories product extension / optional / motor drive	No 7.13 in 181 mm 4.13 in 105 mm 3.39 in 86 mm  Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm  tin  tin

ambient temperature -25 °C • during operation / minimum • during operation / maximum 70 °C -40 °C • during storage / minimum 80 °C • during storage / maximum

Q

reference code / according to IEC 81346-2

**General Product Approval** 

Confirmation





**Miscellaneous** 





**EMC** 

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping





**Miscellaneous** 

Special Test Certificate





Marine / Shipping

other

**Miscellaneous** 

**Dangerous Good** 

**Environment** 

CCS / China Classification Society

Confirmation

**Miscellaneous** 

**Transport Information** 

**Environmental Confirmations** 

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA2125-0MN32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA2125-0MN32-0AA0


**CAx-Online-Generator** 


http://www.siemens.com/cax


**Tender specifications** 


http://www.siemens.com/specifications

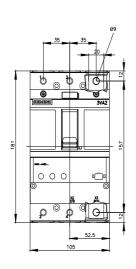

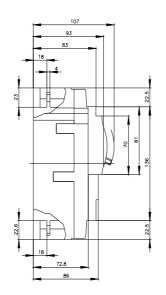





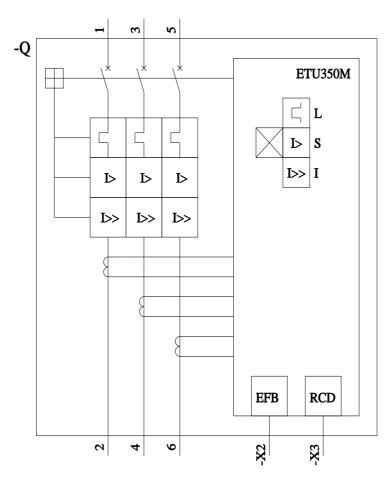

last modified: 7/19/2022 🖸

