



circuit breaker 3VA1 IEC frame 1000 breaking capacity class H Icu=70kA @ 415V 3-pole, line protection TM240, ATAM, In=800A overload protection Ir=560A...800A short-circuit protection Ii=5...10 x In nut keeper kit circuit breaker 3VA1 IEC frame 1000 breaking capacity class H Icu=70kA @ 415V 3-pole, line protection TM240, ATAM, In=800A overload protection Ir=560A...800A short-circuit protection Ii=5...10 x In nut UNDERVOLTAGE RELEASE 24 V DC ACCESSORY FOR 3VA1 and 3VA20 up 2 AUXILIARY SWITCH CHANGEOVER H 1 TRIP ALARM SWITCH CHANGEOVER

| Model                                                                                                 |                                               |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| product brand name                                                                                    | SETRON                                        |
| product designation                                                                                   | Molded case circuit breaker                   |
| design of the overcurrent release                                                                     | TM240                                         |
| protection function of the overcurrent release                                                        | LI                                            |
| number of poles                                                                                       | 3                                             |
| design of the auxiliary release                                                                       | undervoltage release (UVR)                    |
| design of the auxiliary switch                                                                        | 2 auxiliary switches + 1 trip alarm switch HQ |
| General technical data                                                                                |                                               |
| insulation voltage / rated value                                                                      | 800 V                                         |
| operating voltage / at DC / rated value                                                               | 750 V                                         |
| operating voltage / at AC / rated value                                                               | 690 V                                         |
| power loss [W] / maximum                                                                              | 242.5 W                                       |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole           | 80.83 W                                       |
| mechanical service life (operating cycles) / typical                                                  | 10 000                                        |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                      | 4 600                                         |
| electrical endurance (operating cycles) / at AC-1 / at 690 V                                          | 3 200                                         |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | No                                            |
| ground-fault monitoring version                                                                       | Without                                       |
| product function                                                                                      |                                               |
| • communication function                                                                              | No                                            |
| • other measurement function                                                                          | No                                            |
| Net Weight                                                                                            | 13.996 kg                                     |
| Current                                                                                               |                                               |
| operational current                                                                                   |                                               |
| • at 40 °C                                                                                            | 800 A                                         |
| • at 45 °C                                                                                            | 800 A                                         |
| • at 50 °C                                                                                            | 800 A                                         |
| • at 55 °C                                                                                            | 780 A                                         |
| • at 60 °C                                                                                            | 761 A                                         |
| • at 65 °C                                                                                            | 741 A                                         |
| • at 70 °C                                                                                            | 722 A                                         |
| Switching capacity according to IEC 60947                                                             |                                               |
| switching capacity class of the circuit breaker                                                       | H                                             |
| maximum short-circuit current breaking capacity (Icu)                                                 |                                               |
| • at 240 V                                                                                            | 100 kA                                        |
| • at 415 V                                                                                            | 70 kA                                         |
| • at 440 V                                                                                            | 70 kA                                         |
| • at 500 V                                                                                            | 55 kA                                         |

|                                                                                                                                              |                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 690 V</li> </ul>                                                                                 | 35 kA                                                                                                                                                          |
| operating short-circuit current breaking capacity (Ics)                                                                                      |                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 100 kA<br>70 kA<br>70 kA<br>55 kA<br>19 kA                                                                                                                     |
| short-circuit current making capacity (Icm)                                                                                                  |                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 220 kA<br>154 kA<br>154 kA<br>121 kA<br>73.5 kA                                                                                                                |
| design of short-circuit protection                                                                                                           | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |

#### Adjustable parameters

|                                                                                          |                    |
|------------------------------------------------------------------------------------------|--------------------|
| product feature / for L-tripping / can be switched on/off                                | No                 |
| adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic |                    |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>           | 560 A<br>800 A     |
| adjustable response value delay time (tr) / for L-tripping / with I2t characteristic     |                    |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>           | 1 s<br>1 s         |
| adjustable response value setting current (Ii) / for I-tripping                          |                    |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>           | 4 000 A<br>8 000 A |
| adjustable absolute value setting current (InN) / for N-tripping                         |                    |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>           | 0 A<br>0 A         |
| product function / grounding protection                                                  | No                 |

#### Mechanical Design

|                                                                                                                               |                  |
|-------------------------------------------------------------------------------------------------------------------------------|------------------|
| product component                                                                                                             |                  |
| <ul style="list-style-type: none"> <li>• undervoltage release</li> <li>• voltage trigger</li> <li>• trip indicator</li> </ul> | Yes<br>No<br>Yes |
| height [in]                                                                                                                   | 12.6 in          |
| height                                                                                                                        | 320 mm           |
| width [in]                                                                                                                    | 8.27 in          |
| width                                                                                                                         | 210 mm           |
| depth [in]                                                                                                                    | 4.72 in          |
| depth                                                                                                                         | 120 mm           |

#### Connections

|                                                                                           |                             |
|-------------------------------------------------------------------------------------------|-----------------------------|
| arrangement of electrical connectors / for main current circuit                           | Front terminal              |
| type of electrical connection / for main current circuit                                  | nut keeper kit on both ends |
| type of connectable conductor cross-sections / for flat-bar terminal connection / minimum | 20 x 4 mm                   |
| type of connectable conductor cross-sections / for flat-bar terminal connection / maximum | 50 x 28 mm                  |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)        | Silver                      |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)     | Silver                      |

#### Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| number of CO contacts / for auxiliary contacts | 3 |
|------------------------------------------------|---|

#### Accessories

|                                                                                                                                                                                                        |                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| product extension / optional / motor drive                                                                                                                                                             | No                                                                                                 |
| manufacturer's article number                                                                                                                                                                          |                                                                                                    |
| <ul style="list-style-type: none"> <li>• of the supplied basic switch</li> <li>• of the integrated auxiliary switch/alarm switch</li> <li>• of the integrated auxiliary switch/alarm switch</li> </ul> | <a href="#">3VA15806EF320AA0</a><br><a href="#">3VA9988-0AA12</a><br><a href="#">3VA9988-0AB12</a> |

- of the integrated auxiliary trip unit

[3VA9608-0BB11](#)

#### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| protection class IP / on the front | IP40   |
| ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

#### Certificates

|                                           |     |
|-------------------------------------------|-----|
| reference code / according to IEC 81346-2 | Q   |
| General Product Approval                  | EMC |



[Confirmation](#)



[Miscellaneous](#)



|                           |                   |                   |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



EG-Konf.

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)



ABS

|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



DNV



LRS



RMRS

[Confirmation](#)

[Miscellaneous](#)

|       |             |
|-------|-------------|
| other | Environment |
|-------|-------------|

[Miscellaneous](#)

[Environmental Confirmations](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1580-6EF32-0BH0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA1580-6EF32-0BH0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA1580-6EF32-0BH0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1580-6EF32-0BH0)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

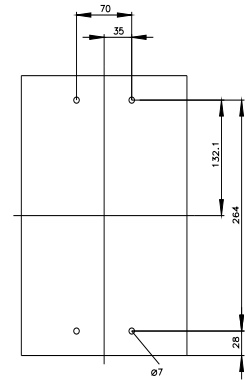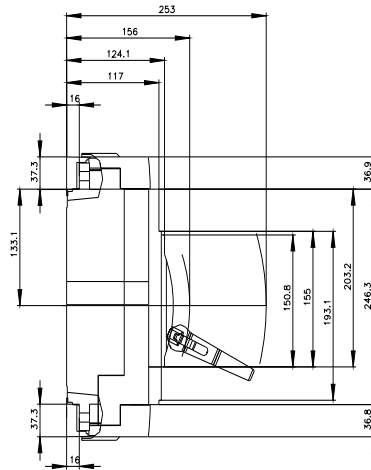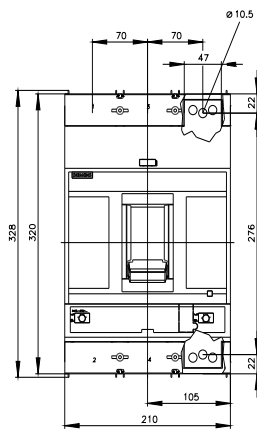

last modified:

10/22/2022 

