3VA6580-6HL32-2AA0

## **Data sheet**



Circuit breaker 3VA6 UL Frame 800 breaking capacity class H 65kA @ 480 V 3-pole, Line protection ETU320, LI, In=800A overload protection, 100% rated Ir=315A ...800A Short-circuit protection Ii=1.5...10 x In Nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	HMAE
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the overcurrent release	ETU320
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	231 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	77 W
mechanical service life (operating cycles) / typical	10 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	5 800
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 000
electrical endurance (operating cycles) / at 480 V	5 800
electrical endurance (operating cycles) / at 600 V	4 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	without
product function	
<ul> <li>communication function</li> </ul>	No
other measurement function	No
Net Weight	14.55 kg
Current	
marking / according to UL 489 / 100%-rated breaker	Yes
operational current	
• at 40 °C	0 A
• at 45 °C	0 A
• at 50 °C	0 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	Н
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	110 kA
• at 415 V	85 kA
• at 690 V	35 kA
operating short-circuit current breaking capacity (Ics)	

101011	440.4
• at 240 V	110 kA
• at 415 V	85 kA
• at 690 V	19 kA
short-circuit current making capacity (Icm)	
• at 240 V	242 kA
• at 415 V	187 kA
• at 690 V	74 kA
Switching capacity according to UL 489	
current breaking capacity	
● at 240 V	150 kA
● at 480 V	65 kA
● at 600 V	35 kA
Adjustable parameters	
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	315 A
• maximum	800 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	0.5 s
• maximum	17 s
adjustable response value setting current (li) / for I-tripping	
• minimum	1 200 A
• maximum	8 000 A
adjustable absolute value setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
adjustable current response value current / of instantaneous short-circuit trip unit	
• minimum	1 200 A
• maximum	8 000 A
product function / grounding protection	No
product function / grounding protection  Mechanical Design	No
	No
Mechanical Design	No No
Mechanical Design product component	
Mechanical Design  product component  • undervoltage release	No
Mechanical Design  product component  • undervoltage release  • voltage trigger	No No
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator	No No No
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]	No No No 12.91 in
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height	No No No 12.91 in 328 mm
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]	No No No 12.91 in 328 mm 8.27 in
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]	No No No 12.91 in 328 mm 8.27 in 210 mm
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm
Mechanical Design  product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm
mechanical Design  product component  undervoltage release  voltage trigger  trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of connectable conductor cross-sections / for flat-bar	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm
mechanical Design  product component  undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  Auxiliary circuit	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm  No  IP40
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm   No  IP40  -25 °C
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm 50 x 28 mm   No  IP40  -25 °C 70 °C
product component	No No No 12.91 in 328 mm 8.27 in 210 mm 4.72 in 120 mm  Front connection nut keeper kit on both ends 20 x 4 mm  50 x 28 mm  0  No IP40  -25 °C 70 °C -40 °C

reference code / according to IEC 81346-2

Q

certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB

Yes

## **General Product Approval**



Confirmation





**Miscellaneous** 



**EMC** 

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report





other

Dangerous Good

<u>Miscellaneous</u>

Confirmation

**Miscellaneous** 

**Transport Information** 

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

 $Information-\ and\ Download center\ (Catalogs,\ Brochures,...)$ 

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6580-6HL32-2AA0}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA6580-6HL32-2AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA6580-6HL32-2AA0


**CAx-Online-Generator** 


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications

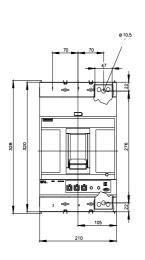


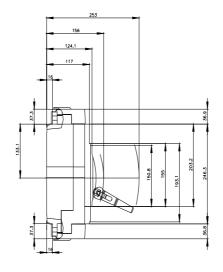





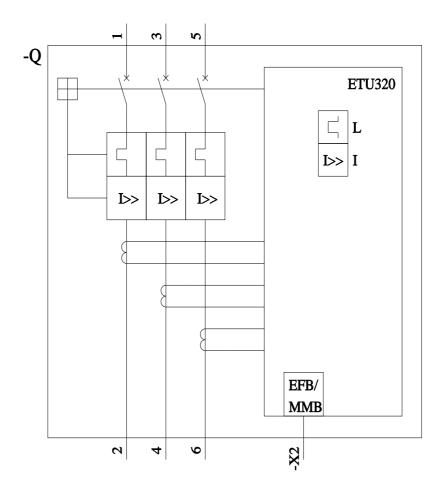

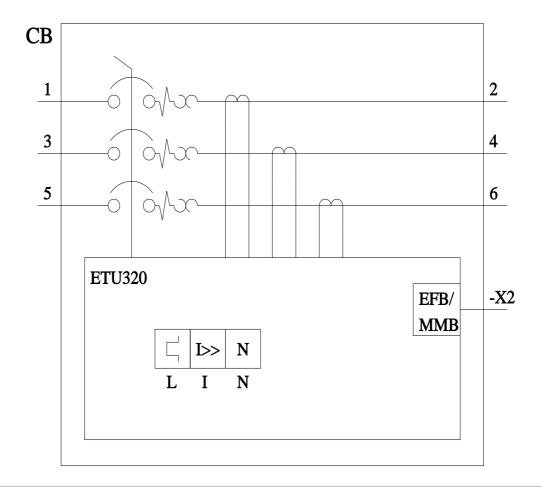

last modified: 10/22/2022 🖸