



Accessory for 3KD0 size 01/02 Auxiliary switch, 1NO + 1NC solid-state-compatible without connecting cable

Model	
product brand name	SETRON
product designation	Accessories for switch disconnectors
design of the product	Auxiliary switch
Auxiliary circuit	
operational current of auxiliary contacts	
• at AC-15 at 230 V	3 A
• at DC-13 at 230 V	0.3 A
Suitability	
suitability for use	for 3KD size 01 and 02
Product details	
product description	1 NO contact, 1 NC contact, leading switching on, lagging switching off, solid-state compatible
Connections	
type of electrical connection	box terminal
• for auxiliary and control circuit	Box terminal
Mechanical Design	
height	50 mm
width	11 mm
depth	32 mm
fastening method	Can be plugged in and integrated
net weight	19 g
General Product Approval	
	other



[Confirmation](#)

[Miscellaneous](#)



[Miscellaneous](#)

[Confirmation](#)

Environment

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an

EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD9003-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD9003-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD9003-4


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

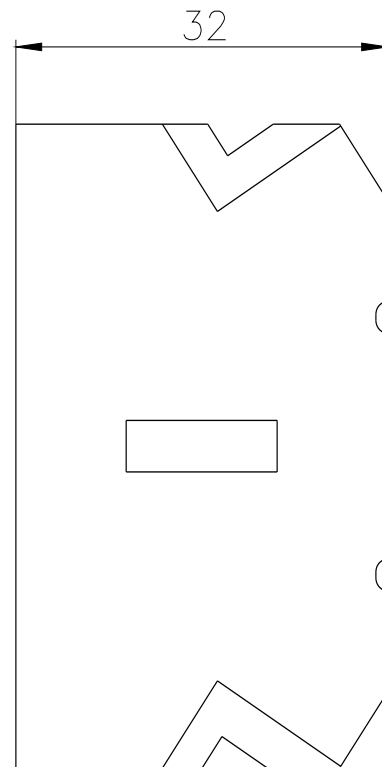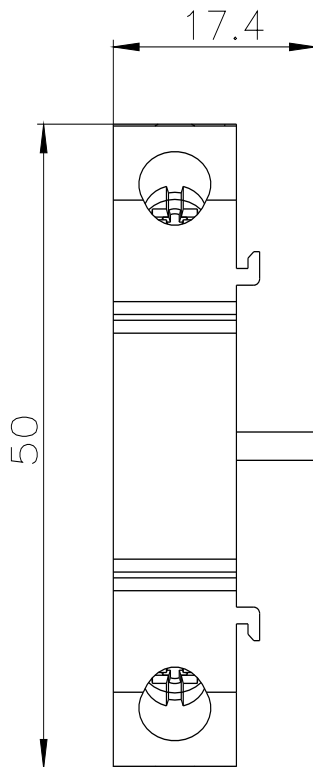

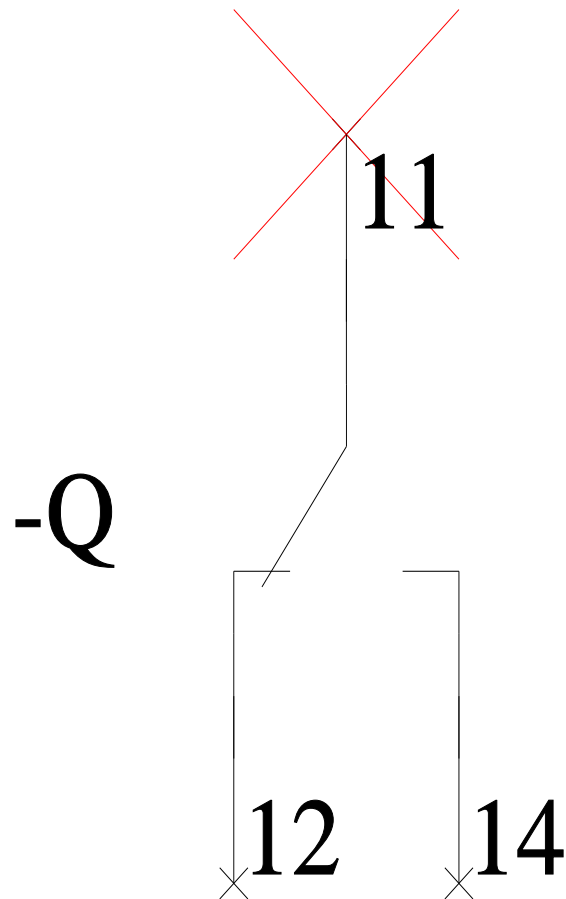

-CR

