3RH2122-2XB40-2LA2

Data sheet



Contactor relay for railway 2 NO + 2 NC, 24 V DC, 0,7...1,25*US, with integrated varistor Size S00, Spring-type terminal suitable for PLC outputs

product brand name	SIRIUS
product designation	Contactor relay for railway applications
product type designation	3RH2
General technical data	
size of contactor	S00
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 8g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	30 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
no-load switching frequency	
• at DC	1 500 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC	
rated value	24 34 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.7
• full-scale value	1.25
design of the surge suppressor	Varistor
inrush current peak	2.3 A
duration of inrush current peak	50 μs

locked roter current mean value	0.18 A
locked-rotor current mean value	0.18 A
locked-rotor current peak duration of locked-rotor current	0.18 A 250 ms
	40 mA
holding current mean value closing power of magnet coil at DC	4 W
holding power of magnet coil at DC	0.95 W
closing delay	0.95 W
• at DC	30 70 ms
opening delay	30 70 ms
• at DC	25 45 ms
arcing time	10 15 ms
residual current of the electronics for control with signal <0> at	10 mA
DC at 24 V maximum permissible	
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
instantaneous contact	2
number of NO contacts for auxiliary contacts	2
instantaneous contact	2
identification number and letter for switching elements	22 E
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value at 600 V rated value	2 A
at 690 V rated value	1 A
operational current at 1 current path at DC-12	40.4
at 24 V rated value at 110 V rated value	10 A 3 A
at 110 V rated value at 220 V rated value	1A
at 440 V rated value at 440 V rated value	0.3 A
• at 600 V rated value	0.15 A
operational current with 2 current paths in series at DC-12	0.10 A
at 24 V rated value	10 A
at 60 V rated value	10 A
at 110 V rated value	4 A
at 220 V rated value	2 A
at 440 V rated value	1.3 A
at 600 V rated value	0.65 A
operational current with 3 current paths in series at DC-12	
at 24 V rated value	10 A
• at 60 V rated value	10 A
• at 110 V rated value	10 A
• at 220 V rated value	3.6 A
• at 440 V rated value	2.5 A
• at 600 V rated value	1.8 A
operating frequency at DC-12 maximum	1 000 1/h
operational current at 1 current path at DC-13	
• at 24 V rated value	10 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
• at 440 V rated value	0.14 A
at 600 V rated value	0.1 A
operational current with 2 current paths in series at DC-13	
at 24 V rated value	10 A
at 60 V rated value	3.5 A
• at 110 V rated value	1.3 A
at 220 V rated value	0.9 A
• at 440 V rated value	0.2 A
• at 600 V rated value	0.1 A
operational current with 3 current paths in series at DC-13	40 A
at 24 V rated value	10 A

at 60 V rated value	4.7 A
• at 110 V rated value	3 A
 at 220 V rated value 	1.2 A
 at 440 V rated value 	0.5 A
at 600 V rated value	0.26 A
operating frequency at DC-13 maximum	1 000 1/h
design of the miniature circuit breaker for short-circuit protection	C characteristic: 6 A; 0.4 kA
of the auxiliary circuit up to 230 V	
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
Installation/ mounting/ dimensions	
mounting position	hanging, on horizontal mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail
side-by-side mounting	Yes
height	70 mm
width	45 mm
depth	73 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
 for live parts 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection for auxiliary and control circuit	spring-loaded terminals
connectable conductor cross-section for auxiliary contacts	
• solid or stranded	0.5 4 mm²
• finely stranded with core end processing	0.5 2.5 mm²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0,5 4 mm²)
 finely stranded with core end processing 	2x (0.5 2.5 mm²)
finely stranded without core end processing	2x (0.5 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 12)
AWG number as coded connectable conductor cross section for	20 12
auxiliary contacts	
Safety related data	
product function positively driven operation according to IEC	Yes
60947-5-1	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
with high demand rate according to SN 31920	73 %
T1 value for proof test interval or service life according to IEC	20 a
61508	ID20
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

General Product Approval





<u>Confirmation</u>

FAC



EMC

Functional Safety/Safety of Machinery

Declaration of Conformity

Test Certificates

<u>KC</u>

Marine / Shipping

Type Examination Certificate





Type Test Certificates/Test Report





Marine / Shipping











Confirmation

other

other

Railway

Dangerous Good



Vibration and Shock

Special Test Certificate

Transport Information

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2122-2XB40-2LA2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2122-2XB40-2LA2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-2XB40-2LA2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2122-2XB40-2LA2&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-2XB40-2LA2/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2122-2XB40-2LA2&objecttype=14&qridview=view1







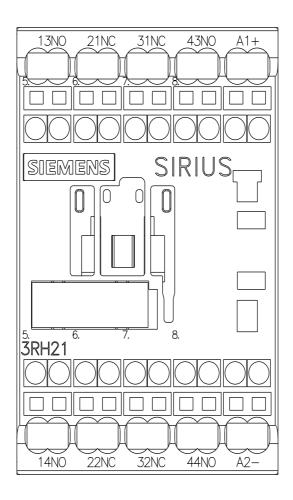

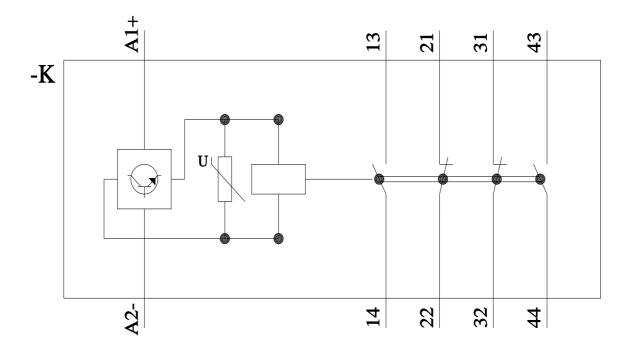

last modified: 12/6/2022 🖸