3RT1054-3AR38-0PR0

Data sheet



power contactor, AC-3e/AC-3 115 A, 55 kW / 400 V, AC (50-60 Hz) / DC Uc: 440-480 V 3-pole, auxiliary switch right 3RH1921-2DE11 drive: conventional main circuit: box terminal control and auxiliary circuit: spring-loaded terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S6
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	21 W
 at AC in hot operating state per pole 	7 W
 without load current share typical 	5.2 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	500 V
surge voltage resistance	
of main circuit rated value	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
operating voltage		
at AC-3 rated value maximum	1 000 V	
at AC-3e rated value maximum	1 000 V	
operational current		
at AC-1 at 400 V at ambient temperature 40 °C rated value	160 A	
• at AC-1		
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	160 A	
— up to 690 V at ambient temperature 60 °C rated value	140 A	
— up to 1000 V at ambient temperature 40 °C rated value	80 A	
— up to 1000 V at ambient temperature 60 °C rated value	80 A	
• at AC-3	445.4	
— at 400 V rated value	115 A	
— at 500 V rated value	115 A	
— at 690 V rated value	115 A	
— at 1000 V rated value	53 A	
• at AC-3e		
— at 400 V rated value	115 A	
— at 500 V rated value	115 A	
— at 690 V rated value	115 A	
— at 1000 V rated value	53 A	
• at AC-4 at 400 V rated value	97 A	
• at AC-5a up to 690 V rated value	140 A	
• at AC-5b up to 400 V rated value	95 A	
• at AC-6a		
— up to 230 V for current peak value n=20 rated value	115 A	
— up to 400 V for current peak value n=20 rated value	115 A	
— up to 500 V for current peak value n=20 rated value	115 A	
— up to 690 V for current peak value n=20 rated value	115 A	
— up to 1000 V for current peak value n=20 rated value	53 A	
• at AC-6a		
— up to 230 V for current peak value n=30 rated value	98 A	
— up to 400 V for current peak value n=30 rated value	98 A	
— up to 500 V for current peak value n=30 rated value	98 A	
— up to 690 V for current peak value n=30 rated value	98 A	
— up to 1000 V for current peak value n=30 rated value	53 A	
minimum cross-section in main circuit at maximum AC-1 rated value	70 mm ²	
operational current for approx. 200000 operating cycles at AC-4		
• at 400 V rated value	54 A	
at 690 V rated value	48 A	
operational current		
at 1 current path at DC-1		
— at 24 V rated value	160 A	
— at 60 V rated value	160 A	
— at 110 V rated value	18 A	
— at 220 V rated value	3.4 A	
— at 440 V rated value	0.8 A	
	0.5 A	
— at 600 V rated value		
— at 600 V rated valuewith 2 current paths in series at DC-1		
	160 A	
• with 2 current paths in series at DC-1	160 A 160 A	

— at 220 V rated value	20 A
— at 440 V rated value	3.2 A
— at 600 V rated value	1.6 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	11.5 A
— at 600 V rated value	4 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	7.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.17 A
— at 600 V rated value	0.12 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	1.4 A
— at 600 V rated value	0.75 A
operating power	
at AC-2 at 400 V rated value	55 kW
• at AC-3	
— at 230 V rated value	37 kW
— at 400 V rated value	55 kW
— at 500 V rated value	75 kW
— at 690 V rated value	110 kW
— at 1000 V rated value	75 kW
• at AC-3e	10 101
— at 230 V rated value	37 kW
— at 400 V rated value	55 kW
— at 500 V rated value	75 kW
— at 690 V rated value	110 kW
— at 1000 V rated value	75 kW
operating power for approx. 200000 operating cycles at AC-	10 MI
4	
at 400 V rated value	29 kW
• at 690 V rated value	48 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	40 000 kVA
• up to 400 V for current peak value n=20 rated value	80 000 VA
 up to 500 V for current peak value n=20 rated value 	100 000 VA
 up to 690 V for current peak value n=20 rated value 	130 000 VA
up to 1000 V for current peak value n=20 rated value	90 000 VA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	30 000 VA
 up to 400 V for current peak value n=30 rated value 	60 000 VA
up to 500 V for current peak value n=30 rated value	80 000 VA
up to 690 V for current peak value n=30 rated value	110 000 VA
up to 1000 V for current peak value n=30 rated value	90 000 VA
short-time withstand current in cold operating state up to	
The state of the s	

40 °C	
 limited to 1 s switching at zero current maximum 	2 565 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	1 654 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	1 170 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	729 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 60 s switching at zero current maximum 	572 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
operating frequency	2 000 1/11
at AC-1 maximum	800 1/h
• at AC-2 maximum	400 1/h
• at AC-3 maximum	1 000 1/h
at AC-3e maximum	1 000 1/h
at AC-4 maximum	130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	440 480 V
at 60 Hz rated value	440 480 V
control supply voltage at DC	
• rated value	440 480 V
operating range factor control supply voltage rated value of	
magnet coil at DC	
• initial value	0.8
full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.8 1.1
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC	
● at 50 Hz	300 VA
• at 60 Hz	300 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.9
• at 60 Hz	0.9
apparent holding power of magnet coil at AC	
• at 50 Hz	5.8 VA
• at 60 Hz	5.8 VA
	0.0 VA
inductive power factor with the holding power of the coil	0.0
• at 50 Hz	0.8
• at 60 Hz	0.8
closing power of magnet coil at DC	360 W
holding power of magnet coil at DC	5.2 W
closing delay	
• at AC	20 95 ms
• at DC	20 95 ms
opening delay	
• at AC	40 60 ms
• at DC	40 60 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	0
number of NO contacts for auxiliary contacts instantaneous contact	0
operational current at AC-15	
•	2 A
at 500 V rated value at 600 V rated value	
at 690 V rated value	1 A
operational current at DC-12	

at 24 V rated value	10 A
at 48 V rated value	6 A
at 125 V rated value	2 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
● at 48 V rated value	2 A
● at 60 V rated value	0.3 A
at 125 V rated value	0.9 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	124 A
at 600 V rated value	125 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 230 V rated value	25 hp
• for 3-phase AC motor	
— at 200/208 V rated value	40 hp
— at 220/230 V rated value	50 hp
— at 460/480 V rated value	100 hp
— at 575/600 V rated value	125 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	7,0007, Q000
design of the fuse link	
for short-circuit protection of the main circuit	
with type of coordination 1 required	gG: 355 A (690 V, 100 kA)
with type of assignment 2 required	gG: 250 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 250 A (415 V, 50
	kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
side-by-side mounting	Yes
height	
height	172 mm
width	172 mm 120 mm
width depth	
width depth required spacing	120 mm
width depth	120 mm 170 mm
width depth required spacing	120 mm
width depth required spacing • with side-by-side mounting	120 mm 170 mm
width depth required spacing • with side-by-side mounting — forwards	120 mm 170 mm 20 mm
width depth required spacing • with side-by-side mounting — forwards — upwards	120 mm 170 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards	120 mm 170 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side	120 mm 170 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards	120 mm 170 mm 20 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • at the side • at the side • at the side	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — of the side — downwards — at the side — forwards — at the side — forwards — forwards	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — downwards • for live parts — forwards — upwards — downwards • for live parts — forwards — upwards — upwards — upwards	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards — at the side	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — downwards • for live parts — forwards — upwards — upwards — at the side — downwards — at the side Connections/ Terminals	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • at the side — downwards — at the side — downwards — at the side Connections/ Terminals type of electrical connection	120 mm 170 mm 20 mm 10 mm 0 mm 0 mm 20 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • downwards — at the side — downwards • for live parts — forwards — upwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit	120 mm 170 mm 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm

type of connectable conductor cross-sections for main contacts	
• stranded	max. 1x 50, 1x 70 mm ²
 solid or stranded 	max. 1x 50, 1x 70 mm ²
 finely stranded with core end processing 	max. 1x 50, 1x 70 mm ²
 finely stranded without core end processing 	max. 1x 50, 1x 70 mm²
connectable conductor cross-section for main contacts	
• stranded	16 70 mm²
 finely stranded with core end processing 	16 70 mm²
 finely stranded without core end processing 	16 70 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.25 2.5 mm²
 finely stranded with core end processing 	0.25 1.5 mm²
 finely stranded without core end processing 	0.25 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid	2x (0.25 2.5 mm²)
— solid or stranded	2x (0,25 2,5 mm²)
 finely stranded with core end processing 	2x (0.25 1.5 mm²)
 finely stranded without core end processing 	2x (0.25 2.5 mm²)
for AWG cables for auxiliary contacts	2x (24 14)
AWG number as coded connectable conductor cross section	
for auxiliary contacts	24 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
B10 value with high demand rate according to SN 31920	1 000 000
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
 safety-related switching on 	Yes
safety-related switching OFF	Yes
Certificates/ approvals	

General Product Approval





Confirmation



<u>KC</u>



Functional Safety/Safety of Ma-chinery **EMC Declaration of Conformity Test Certificates**



Type Examination Cer-<u>tificate</u>





Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report

Marine / Shipping









Miscellaneous

other

Confirmation

other Railway

Further information

Confirmation

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1054-3AR38-0PR0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1054-3AR38-0PR0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-3AR38-0PR0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1054-3AR38-0PR0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-3AR38-0PR0/cha


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1054-3AR38-0PR0&objecttype=14&gridview=view1







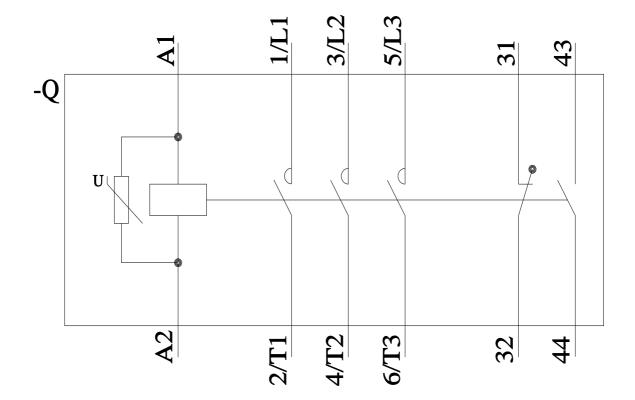

last modified: 2/10/2023 🖸