3RT2035-3AK64-3MA0

## **Data sheet**



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, auxiliary contacts: 2 NO + 2 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, captive auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
• function module for communication	No
auxiliary switch	No
power loss [W] for rated value of the current	
at AC in hot operating state	6.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.2 W
<ul> <li>without load current share typical</li> </ul>	18.5 W
insulation voltage	
• of main circuit with degree of pollution 3 rated value	690 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
• at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	60 A
value	
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	60 A
— up to 690 V at ambient temperature 60 °C rated	55 A
value	
• at AC-3	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	35 A
• at AC-5a up to 690 V rated value	52.8 A
• at AC-5b up to 400 V rated value	33.2 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	36.5 A
— up to 400 V for current peak value n=20 rated value	36.5 A
— up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	24.2 A
— up to 400 V for current peak value n=30 rated value	24.2 A
— up to 500 V for current peak value n=30 rated value	24.2 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm²
operational current for approx. 200000 operating cycles at	
AC-4	00.4
• at 400 V rated value	22 A
at 690 V rated value	18.5 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
<ul><li>with 3 current paths in series at DC-1</li></ul>	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>	

— at 24 V rated value	35 A		
— at 60 V rated value	6 A		
— at 220 V rated value	1 A		
— at 440 V rated value	0.1 A		
— at 600 V rated value	0.06 A		
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>			
— at 24 V rated value	55 A		
— at 60 V rated value	45 A		
— at 110 V rated value	25 A		
— at 220 V rated value	5 A		
— at 440 V rated value	0.27 A		
— at 600 V rated value	0.16 A		
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>			
— at 24 V rated value	55 A		
— at 60 V rated value	55 A		
— at 110 V rated value	55 A		
— at 220 V rated value	25 A		
— at 440 V rated value	0.6 A		
— at 600 V rated value	0.35 A		
operating power			
• at AC-2 at 400 V rated value	18.5 kW		
• at AC-3			
— at 230 V rated value	11 kW		
— at 400 V rated value	18.5 kW		
— at 500 V rated value	22 kW		
— at 690 V rated value	22 kW		
• at AC-3e			
— at 230 V rated value	11 kW		
— at 400 V rated value	18.5 kW		
— at 500 V rated value	22 kW		
— at 690 V rated value	22 kW		
operating power for approx. 200000 operating cycles at AC-			
4			
<ul> <li>at 400 V rated value</li> </ul>	11.6 kW		
at 690 V rated value	16.8 kW		
operating apparent power at AC-6a			
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	14.5 kVA		
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	25.2 kVA		
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	31.6 kVA		
up to 690 V for current peak value n=20 rated value	28.6 kVA		
operating apparent power at AC-6a			
• up to 230 V for current peak value n=30 rated value	9.6 kVA		
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	16.8 kVA		
• up to 500 V for current peak value n=30 rated value	21 kVA		
• up to 690 V for current peak value n=30 rated value	28.6 kVA		
short-time withstand current in cold operating state up to			
40 °C	942 At Line minimum group section and to AC 4 rated value		
Ilimited to 1 s switching at zero current maximum	843 A; Use minimum cross-section acc. to AC-1 rated value		
Ilimited to 5 s switching at zero current maximum	596 A; Use minimum cross-section acc. to AC-1 rated value		
Ilimited to 10 s switching at zero current maximum	400 A; Use minimum cross-section acc. to AC-1 rated value		
Iimited to 30 s switching at zero current maximum	241 A; Use minimum cross-section acc. to AC-1 rated value		
Iimited to 60 s switching at zero current maximum	196 A; Use minimum cross-section acc. to AC-1 rated value		
no-load switching frequency	5 000 4/b		
• at AC	5 000 1/h		
operating frequency	4 200 4/b		
• at AC-1 maximum	1 200 1/h		
• at AC-2 maximum	750 1/h		
• at AC-3 maximum	1 000 1/h		
• at AC-3e maximum	1 000 1/h		
• at AC-4 maximum	300 1/h		
Control circuit/ Control			

type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of	120 V
magnet coil at AC	
● at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	212 VA
● at 60 Hz	188 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
● at 50 Hz	18.5 VA
● at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
● at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	2
contact number of NO contacts for auxiliary contacts instantaneous	2
contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
•	
at 230 V rated value	6 A
<ul><li>at 230 V rated value</li><li>at 400 V rated value</li></ul>	3 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> </ul>	3 A 2 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>	3 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12	3 A 2 A 1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value	3 A 2 A 1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value	3 A 2 A 1 A 10 A 6 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value	3 A 2 A 1 A 10 A 6 A 6 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 24 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 24 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 610 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 110 V rated value at 125 V rated value at 148 V rated value at 150 V rated value at 150 V rated value at 110 V rated value at 110 V rated value at 110 V rated value at 125 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 25 V rated value at 600 V rated value at 25 V rated value at 25 V rated value at 26 V rated value at 27 V rated value at 28 V rated value at 60 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 150 V rated value at 24 V rated value at 250 V rated value at 600 V rated value at 100 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 25 V rated value at 600 V rated value at 25 V rated value at 25 V rated value at 26 V rated value at 27 V rated value at 28 V rated value at 60 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 110 V rated value at 600 V rated value at 125 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A  1 faulty switching per 100 million (17 V, 1 mA)
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 125 V rated value at 126 V rated value at 127 V rated value at 128 V rated value at 129 V rated value at 120 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 25 V rated value at 26 V rated value at 600 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 126 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 480 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

— at 230 V rated value	7.5 hp		
• for 3-phase AC motor			
— at 200/208 V rated value	10 hp		
— at 220/230 V rated value	15 hp		
— at 460/480 V rated value	30 hp		
— at 575/600 V rated value	40 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
design of the fuse link			
<ul> <li>for short-circuit protection of the main circuit</li> </ul>			
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)		
— with type of assignment 2 required	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)		
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions	99. 10 A (300 V, 1 KA)		
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and		
mounting position	backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	114 mm		
width	55 mm		
depth	178 mm		
required spacing			
with side-by-side mounting			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
for grounded parts			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
• for live parts			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
for auxiliary and control circuit	spring-loaded terminals		
at contactor for auxiliary contacts	Spring-type terminals		
of magnet coil	Spring-type terminals		
type of connectable conductor cross-sections for main contacts			
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)		
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)		
connectable conductor cross-section for main contacts	, , , , , , , , , , , , , , , , , , , ,		
finely stranded with core end processing	1 35 mm²		
connectable conductor cross-section for auxiliary contacts			
solid or stranded	0.5 2.5 mm²		
finely stranded with core end processing	0.5 1.5 mm <sup>2</sup>		
finely stranded without core end processing	0.5 2.5 mm <sup>2</sup>		
type of connectable conductor cross-sections			
• for auxiliary contacts			
— solid or stranded	2x (0.5 2.5 mm²)		
finely stranded with core end processing	2x (0.5 1.5 mm²)		
finely stranded with core end processing     finely stranded without core end processing			
Inner stranded without core end processing     for AWG cables for auxiliary contacts	2x (0.5 2.5 mm²) 2x (20 14)		
AWG number as coded connectable conductor cross	£^ (£0 17)		
section			

for main contacts	18 1
<ul> <li>for auxiliary contacts</li> </ul>	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
<ul> <li>safety-related switching on</li> </ul>	Yes
<ul> <li>safety-related switching OFF</li> </ul>	Yes
Certificates/ approvals	

General Product Approval



Confirmation





<u>KC</u>



	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
--	---------------------------------------	---------------------------	-------------------



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

## Marine / Shipping













Marine / Shipping other Railway Dangerous Good Environment



Confirmation

Vibration and Shock

**Transport Information** 

Environmental Confirmations

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AK64-3MA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2035-3AK64-3MA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AK64-3MA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RT2035-3AK64-3MA0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AK64-3


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2035-3AK64-3MA0&objecttype=14&gridview=view1







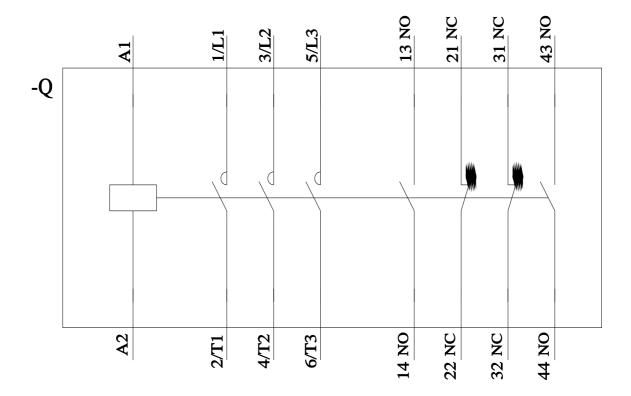

last modified: 2/10/2023 🖸