SIEMENS

Data sheet 3RT2046-1SB30



power contactor, AC-3e/AC-3, 95 A, 45 kW / 400 V, 3-pole, 21-33 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NC, screw terminal, size: S3, F-PLC-IN

Figure similar

| product brand name | SIRIUS |
|--|------------------------------|
| product designation | Power contactor |
| product type designation | 3RT2 |
| General technical data | |
| size of contactor | S3 |
| product extension | |
| function module for communication | No |
| auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| at AC in hot operating state | 19.8 W |
| at AC in hot operating state per pole | 6.6 W |
| without load current share typical | 3.5 W |
| insulation voltage | |
| of main circuit with degree of pollution 3 rated value | 1 000 V |
| of auxiliary circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| of main circuit rated value | 8 kV |
| of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V |
| shock resistance at rectangular impulse | |
| • at AC | 10.3g / 5 ms, 6,.g / 10 ms |
| • at DC | 6.7 g / 5 ms, 4g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 16.3g / 5 ms, 10.g / 10 ms |
| • at DC | 10.6 g / 5 ms, 6.3 g / 10 ms |
| mechanical service life (operating cycles) | |
| of contactor typical | 5 000 000 |
| of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| of the contactor with added auxiliary switch block typical | 5 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 01/29/2021 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| during operation | -25 +60 °C |
| during storage | -55 +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 | 95 % |

| maximum ain circuit | |
|---|--------------------|
| | 3 |
| number of poles for main current circuit number of NO contacts for main contacts | |
| | 3 |
| operating voltage | 4.000.17 |
| at AC-3 rated value maximum | 1 000 V |
| at AC-3e rated value maximum | 1 000 V |
| operational current | 400 4 |
| at AC-1 at 400 V at ambient temperature 40 °C rated value | 130 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated | 130 A |
| value | 10071 |
| — up to 690 V at ambient temperature 60 °C rated | 110 A |
| value | |
| • at AC-3 | |
| — at 400 V rated value | 95 A |
| — at 500 V rated value | 95 A |
| — at 690 V rated value | 78 A |
| — at 1000 V rated value | 30 A |
| • at AC-3e | |
| — at 400 V rated value | 95 A |
| — at 500 V rated value | 95 A |
| — at 690 V rated value | 78 A |
| — at 1000 V rated value | 30 A |
| • at AC-4 at 400 V rated value | 80 A |
| • at AC-5a up to 690 V rated value | 114 A |
| • at AC-5b up to 400 V rated value | 95 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 84.4 A |
| — up to 400 V for current peak value n=20 rated value | 84.4 A |
| — up to 500 V for current peak value n=20 rated value | 84.4 A |
| — up to 690 V for current peak value n=20 rated value | 58 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 56.3 A |
| — up to 400 V for current peak value n=30 rated value | 56.3 A |
| — up to 500 V for current peak value n=30 rated value | 56.3 A |
| — up to 690 V for current peak value n=30 rated value | 56.3 A |
| minimum cross-section in main circuit at maximum AC-1 rated | 50 mm ² |
| value | 30 11111 |
| operational current for approx. 200000 operating cycles at | |
| AC-4 | |
| at 400 V rated value | 42 A |
| at 690 V rated value | 30 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 100 A |
| — at 60 V rated value | 60 A |
| — at 110 V rated value | 9 A |
| — at 220 V rated value | 2 A |
| — at 440 V rated value | 0.6 A |
| — at 600 V rated value | 0.4 A |
| with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 100 A |
| — at 60 V rated value | 100 A |
| — at 110 V rated value | 100 A |
| — at 220 V rated value | 10 A |
| — at 440 V rated value | 1.8 A |
| — at 600 V rated value | 1 A |
| with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 100 A |
| ALE I VIACOA VAINO | 100 A |

| — at 110 V rated value | 100 A |
|---|---|
| — at 220 V rated value | 80 A |
| — at 440 V rated value | 4.5 A |
| — at 600 V rated value | 2.6 A |
| at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 40 A |
| — at 60 V rated value | 6 A |
| — at 110 V rated value | 2.5 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.15 A |
| — at 600 V rated value | 0.06 A |
| with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 100 A |
| — at 60 V rated value | 100 A |
| — at 110 V rated value | 100 A |
| — at 220 V rated value | 7 A |
| — at 440 V rated value | 0.42 A |
| — at 600 V rated value | 0.16 A |
| with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 100 A |
| — at 60 V rated value | 100 A |
| — at 110 V rated value | 100 A |
| — at 220 V rated value | 35 A |
| — at 440 V rated value | 0.8 A |
| — at 600 V rated value | 0.35 A |
| operating power | 0.33 A |
| at AC-2 at 400 V rated value | 45 kW |
| • at AC-3 | 40 ۸۷۷ |
| | 22 kW |
| — at 230 V rated value | |
| — at 400 V rated value | 45 kW |
| — at 500 V rated value | 55 kW |
| — at 690 V rated value | 75 kW |
| — at 1000 V rated value | 37 kW |
| • at AC-3e | 00.144 |
| — at 230 V rated value | 22 kW |
| — at 400 V rated value | 45 kW |
| — at 500 V rated value | 55 kW |
| — at 690 V rated value | 75 kW |
| — at 1000 V rated value | 37 kW |
| operating power for approx. 200000 operating cycles at AC- | |
| at 400 V rated value | 22 kW |
| at 690 V rated value | 27.4 kW |
| operating apparent power at AC-6a | |
| up to 400 V for current peak value n=20 rated value | 58 000 VA |
| up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value | 73 000 VA |
| up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value | 69 000 VA |
| operating apparent power at AC-6a | 55 555 V/ |
| up to 230 V for current peak value n=30 rated value | 22 400 VA |
| | 39 000 VA |
| up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value | 48 700 VA |
| up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value | 67 300 VA |
| up to 690 V for current peak value n=30 rated value Short-time withstand current in cold operating state up to | 07 000 VA |
| short-time withstand current in cold operating state up to 40 °C | |
| limited to 1 s switching at zero current maximum | 1 725 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 5 s switching at zero current maximum | 1 297 A; Use minimum cross-section acc. to AC-1 rated value |
| Iimited to 10 s switching at zero current maximum | 946 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 30 s switching at zero current maximum | 610 A; Use minimum cross-section acc. to AC-1 rated value |
| Iimited to 60 s switching at zero current maximum | 486 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | , |
| • at AC | 1 000 1/h |
| | |

| a at DC | 1 000 1/b |
|---|--------------------------------|
| • at DC | 1 000 1/h |
| operating frequency | 000 4/h |
| • at AC-1 maximum | 900 1/h |
| • at AC-2 maximum | 350 1/h |
| • at AC-3 maximum | 850 1/h |
| at AC-3e maximum | 850 1/h |
| at AC-4 maximum | 250 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| at 50 Hz rated value | 21 33 V |
| at 60 Hz rated value | 21 33 V |
| control supply voltage at DC | |
| • rated value | 21 33 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 1.1 |
| • at 60 Hz | 0.8 1.1 |
| type of PLC-control input according to IEC 60947-1 | Type 1 |
| consumed current at PLC-control input according to IEC 60947-1 maximum | 11 mA |
| voltage at PLC-control input rated value | 24 V |
| operating range factor of the voltage at PLC-control input | 0.8 1.1 |
| design of the surge suppressor | with varistor |
| inrush current peak | 2.2 A |
| duration of inrush current peak | 100 μs |
| locked-rotor current mean value | 4 A |
| locked-rotor current peak | 6.5 A |
| duration of locked-rotor current | 150 ms |
| holding current mean value | 0.09 A |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 130 VA |
| • at 60 Hz | 130 VA |
| apparent holding power of magnet coil at AC | |
| • at 50 Hz | 2.4 VA |
| • at 60 Hz | 2.4 VA |
| closing power of magnet coil at DC | 130 W |
| holding power of magnet coil at DC | 1.8 W |
| closing delay | |
| • at AC | 50 70 ms |
| • at DC | 50 70 ms |
| opening delay | |
| • at AC | 38 57 ms |
| • at DC | 38 57 ms |
| recovery time after power failure typical | 2.1 s |
| arcing time | 10 20 ms |
| control version of the switch operating mechanism | Fail-safe PLC input (F-PLC-IN) |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts instantaneous contact | 0 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| | |

| operational current at DC-12 | |
|--|--|
| at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| at 220 V rated value | 1 A |
| at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| at 24 V rated value | 10 A |
| at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| at 220 V rated value | 0.3 A |
| at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| at 480 V rated value | 96 A |
| at 600 V rated value at 600 V rated value | 77 A |
| yielded mechanical performance [hp] | 1170 |
| for single-phase AC motor | |
| ior single-phase AC motor — at 110/120 V rated value | 10 hp |
| | |
| — at 230 V rated value | 20 hp |
| • for 3-phase AC motor | 00.1 |
| — at 200/208 V rated value | 30 hp |
| — at 220/230 V rated value | 30 hp |
| — at 460/480 V rated value | 75 hp |
| — at 575/600 V rated value | 75 hp |
| contact rating of auxiliary contacts according to UL | A600 / P600 |
| Short-circuit protection | |
| | |
| design of the fuse link | |
| design of the fuse link • for short-circuit protection of the main circuit | |
| | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 |
| for short-circuit protection of the main circuit with type of coordination 1 required | kA) |
| • for short-circuit protection of the main circuit | kA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required | kA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | kA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | KA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | kA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | kA) gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 10 mm 0 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — at the side • for grounded parts — forwards — forwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm 0 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — forwards — upwards — upwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — upwards — upwards — upwards — upwards — at the side • for grounded parts — at the side | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm 10 mm 10 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — at the side • for grounded parts — at the side — at the side — downwards — at the side — downwards — at the side — downwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — upwards — upwards — upwards — upwards — at the side • for grounded parts — at the side | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm 10 mm 10 mm |
| for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — upwards — at the side — at the side — downwards — at the side — downwards | gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 Yes 140 mm 70 mm 152 mm 20 mm 10 mm 0 mm 10 mm 10 mm |

| - downwards |
|--|
| type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-sections • for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-sections • for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-sections • for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-sections • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts • solid or stranded • finely stranded with core end processing 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) • for AWG cables for auxiliary contacts 2x (20 1.5 mm²), 2x (0.75 2.5 mm²) • for auxiliary contacts • for product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 |
| type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing of or auxiliary contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts • for AWG cables for auxiliary contacts • for AWG cables for auxiliary contacts • for awG cables for auxiliary contacts • for for main contacts • for for main contacts • for or auxiliary contacts • for or auxiliary contacts • for for auxiliary contacts • fo |
| of for main current circuit of ra auxiliary and control circuit of ra auxiliary and control circuit of many et coil screw-type terminals of many et coil screw-type terminals cornectable conductor cross-sections for main contacts of innely stranded with core end processing connectable conductor cross-section for main contacts of innely stranded with core end processing connectable conductor cross-section for main contacts of innely stranded with core end processing connectable conductor cross-section for auxiliary contacts of innely stranded with core end processing connectable conductor cross-section for auxiliary contacts of innely stranded with core end processing of for auxiliary contacts of of auxiliary contacts of or auxiliary contacts of or auxiliary contacts of or auxiliary contacts of or AWG cables for auxiliary contacts of or AWG cables for auxiliary contacts of or auxiliary contacts of auxiliary contacts of auxiliary contacts of auxiliary contacts |
| of ra auxiliary and control circuit at a contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts of finely stranded with core end processing of solid or stranded of finely stranded with core end processing of auxiliary contacts of or AWG cables for auxiliary contacts of or auxiliary contacts of or main contacts of or main contacts of or auxiliary contacts of or AWG cables for auxiliary contacts of or main contacts of or auxiliary |
| • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing • finely stranded with core end processing • for auxiliary contacts - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid or stranded - finely stranded with core end processing • for alvid contacts - solid or stranded - finely stranded with core end processing • for alvid contacts - solid or stranded - finely stranded with core end processing • for auxiliary contacts 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14) AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-5-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 1 000 000 Safety Integrity Level (SIL) according to IEC 61508 |
| of magnet coil type of connectable conductor cross-sections for main contacts of finely stranded with core end processing stranded of finely stranded with core end processing of stranded of finely stranded with core end processing of stranded of finely stranded with core end processing of stranded of finely stranded with core end processing oconnectable conductor cross-section for auxiliary contacts osolid or stranded of finely stranded with core end processing of auxiliary contacts of or |
| type of connectable conductor cross-sections for main contacts • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-sections • finely stranded with core end processing • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts • for fawG cables for auxiliary contacts • for fawG number as coded connectable conductor cross section • for main contacts • for main contacts • for auxiliary contacts 10 2 • for auxiliary contacts • for main contacts • for auxiliary contacts 10 2 • for auxiliary contacts • product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 1 000 000 Safety Integrity Level (SIL) according to IEC 61508 2 |
| • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts • for positively contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 • positively driven operation according to IEC 61508-2 B10 value with high demand rate according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 x (2.5 35 mm²) 2.5 50 mm² 2.7 (0.75 2.5 mm²) 2.7 (2.0 1.5, mm²), 2x (0.75 2.5 mm²) 2.7 (2.0 1.5, mm²), 2x (0.75 2.5 mm²) 3.7 (2.0 1.5, mm²) 3.7 (2.0 1.5, mm²), 2x (0.75 2.5 mm²) 4.7 (2.0 1.5, mm²) 4.7 (2.0 1.5, mm²), 2x (0.75 2.5 mm²) 4.7 (2.0 1.5, mm²) 4.7 (2.0 |
| connectable conductor cross-section for main contacts |
| solid stranded finely stranded with core end processing 2.5 70 mm² finely stranded with core end processing 2.5 50 mm² connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing for auxiliary contacts solid or stranded for auxiliary contacts solid or stranded with core end processing for auxiliary contacts solid or stranded 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) for AWG cables for auxiliary contacts 2x (20 1.5 mm²), 2x (0.75 2.5 mm²) for AWG cables for auxiliary contacts 2x (20 16), 2x (18 14) AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts 20 14 Safety related data product function mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 Type B B10 value with high demand rate according to IEC 61508 2 Safety Integrity Level (SIL) according to IEC 61508 2 |
| stranded finely stranded with core end processing 2.5 50 mm² connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing 0.5 2.5 mm² type of connectable conductor cross-sections for auxiliary contacts — solid or stranded for auxiliary contacts — solid or stranded with core end processing 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) for auxiliary contacts for AWG cables for auxiliary contacts 2x (20 16, 2x (18 14) AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts for auxiliary contacts 20 14 Safety related data product function mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 Type B B10 value with high demand rate according to IEC 61508 2 |
| • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts • for AWG cables for auxiliary contacts 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14) AWG number as coded connectable conductor cross section • for main contacts • for main contacts 10 2 • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 Type B B10 value with high demand rate according to IEC 61508 2 Safety Integrity Level (SIL) according to IEC 61508 2 |
| connectable conductor cross-section for auxiliary contacts |
| solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts — solid or stranded — solid or stranded |
| • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts |
| type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts 10 2 • for auxiliary contacts 10 2 • for auxiliary contacts • for or auxiliary contacts • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2 x (20 16), 2x (18 14) When the transfer of the trans |
| • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts • for or auxiliary contacts • for or auxiliary contacts • for auxiliary contacts • for product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 Safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 |
| - solid or stranded - finely stranded with core end processing - finely stranded with core end processing • for AWG cables for auxiliary contacts 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14) AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 |
| — finely stranded with core end processing • for AWG cables for auxiliary contacts 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14) AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (0.75 2.5 mm²) 2x (0.75 2.5 mm²) 2x (0.75 2.5 mm²) 2x (20 14) 10 2 10 . |
| For AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts for auxiliary contacts product function mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2x (20 16), 2x (18 14) 2x (20 14) 10 2 20 14 Yes Positively driven operation according to IEC 60947-5-1 No Safety device type according to IEC 61508-2 Type B B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| AWG number as coded connectable conductor cross section • for main contacts • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to IEC 61508 2 Type B B10 value with Level (SIL) according to IEC 61508 2 |
| section • for main contacts • for auxiliary contacts 20 14 Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| for auxiliary contacts 20 14 Safety related data product function mirror contact according to IEC 60947-4-1 Yes positively driven operation according to IEC 60947-5-1 No safety device type according to IEC 61508-2 Type B B10 value with high demand rate according to SN 31920 1 000 000 Safety Integrity Level (SIL) according to IEC 61508 2 |
| product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| positively driven operation according to IEC 60947-5-1 safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| Safety device type according to IEC 61508-2 B10 value with high demand rate according to SN 31920 Safety Integrity Level (SIL) according to IEC 61508 2 |
| B10 value with high demand rate according to SN 31920 1 000 000 Safety Integrity Level (SIL) according to IEC 61508 2 |
| Safety Integrity Level (SIL) according to IEC 61508 2 |
| , , , , |
| SIL Claim Limit (subsystem) according to EN 62061 |
| |
| performance level (PL) according to EN ISO 13849-1 c |
| category according to EN ISO 13849-1 2 |
| stop category according to EN 60204-1 0 |
| Safe failure fraction (SFF) 96 % |
| diagnostics test interval by internal test function maximum 28 800 s |
| proportion of dangerous failures |
| • with low demand rate according to SN 31920 40 % |
| • with high demand rate according to SN 31920 73 % |
| failure rate [FIT] with low demand rate according to SN 31920 100 FIT |
| PFHD with high demand rate according to EN 62061 7.7E-8 1/h |
| PFDavg with low demand rate according to IEC 61508 0.0067 |
| MTBF 52 a |
| hardware fault tolerance according to IEC 61508 |
| T1 value for proof test interval or service life according to IEC 61508 |
| |
| protection class IP on the front according to IEC 60529 IP20 |
| touch protection on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front |
| · |
| touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front |
| touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front suitability for use |
| touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front suitability for use • safety-related switching on No |





Confirmation



<u>KC</u>



Functional

EMC Safety/Safety of Ma- Declaration of Conformity Test Certificates
chinery



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping other Railway









Confirmation Vibration and Shock

Further informatior

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2046-1SB30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2046-1SB30

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1SB30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2046-1SB30&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1SB30/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2046-1SB30&objecttype=14&gridview=view1

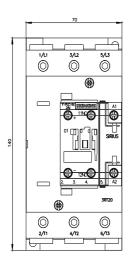

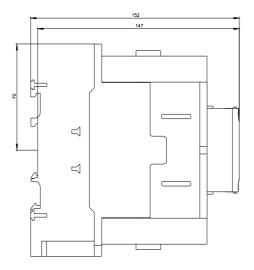

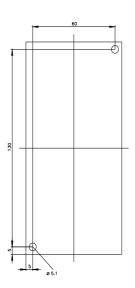

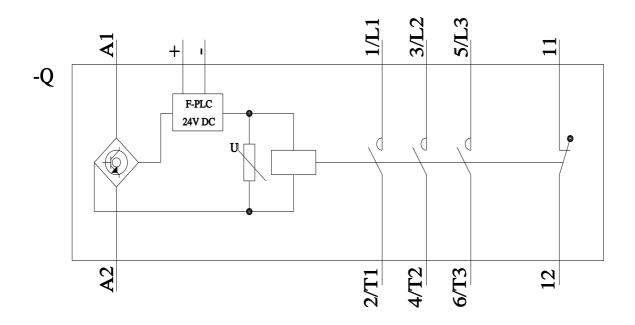

last modified:

2/10/2023

