## **SIEMENS**

Data sheet 3RT2047-1AG20



power contactor, AC-3e/AC-3, 110 A, 55 kW / 400 V, 3-pole, 110 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S3  $\,$ 

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	23.7 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	7.9 W
without load current share typical	25 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	1 000 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/17/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	1 000 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	1 000 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	130 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	130 A
value	
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	110 A
• at AC-3	
— at 400 V rated value	110 A
— at 500 V rated value	110 A
— at 690 V rated value	98 A
— at 1000 V rated value	30 A
• at AC-3e	30 A
	110 A
— at 400 V rated value	110 A
— at 500 V rated value	110 A
— at 690 V rated value	98 A
— at 1000 V rated value	30 A
at AC-4 at 400 V rated value	97 A
at AC-5a up to 690 V rated value	120 A
at AC-5b up to 400 V rated value	110 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	98 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	98 A
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	98 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	98 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	65.3 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	65.3 A
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	65.3 A
— up to 690 V for current peak value n=30 rated value	65.3 A
minimum cross-section in main circuit at maximum AC-1 rated value	50 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	46 A
• at 690 V rated value	36 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	10 A
— at 440 V rated value	1.8 A
— at 600 V rated value	1A
with 3 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A

— at 600 V rated value	2.6 A
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	40 A
— at 60 V rated value	6 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.15 A
— at 600 V rated value	0.06 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	7 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	35 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	55 kW
• at AC-3	
— at 230 V rated value	30 kW
— at 400 V rated value	55 kW
— at 500 V rated value	75 kW
— at 690 V rated value	90 kW
— at 1000 V rated value	37 kW
• at AC-3e	
— at 230 V rated value	30 kW
— at 400 V rated value	55 kW
— at 500 V rated value	75 kW
— at 690 V rated value	90 kW
— at 1000 V rated value	37 kW
operating power for approx. 200000 operating cycles at AC-	
4	
at 400 V rated value	24.3 kW
at 690 V rated value	32.9 kW
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	39 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	67 kVA
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	84 kVA
up to 690 V for current peak value n=20 rated value	117 kVA
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	26 kVA
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	45.2 kVA
• up to 500 V for current peak value n=30 rated value	56.5 kVA
up to 690 V for current peak value n=30 rated value	78 kVA
short-time withstand current in cold operating state up to 40 °C	
limited to 1 s switching at zero current maximum	1 960 A; Use minimum cross-section acc. to AC-1 rated value
limited to 7 s switching at zero current maximum	1 502 A; Use minimum cross-section acc. to AC-1 rated value
limited to 3 3 switching at zero current maximum	1 095 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10's switching at zero current maximum     limited to 30's switching at zero current maximum	707 A; Use minimum cross-section acc. to AC-1 rated value
limited to 50 s switching at zero current maximum     limited to 60 s switching at zero current maximum	562 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	552, 500 minimum 5.000 coolion ado. to 710 mateu value
at AC	5 000 1/h
operating frequency	0 000 1/11
at AC-1 maximum	900 1/h
- at AO T maximall	000 mi

	050.4#
• at AC-2 maximum	350 1/h
• at AC-3 maximum	850 1/h
at AC-3e maximum	850 1/h
• at AC-4 maximum	200 1/h
Control circuit/ Control	**
type of voltage of the control supply voltage	AC
control supply voltage at AC	440.4
at 50 Hz rated value	110 V
at 60 Hz rated value     operating range factor control supply voltage rated value of	110 V
magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	348 VA
● at 60 Hz	296 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.62
• at 60 Hz	0.55
apparent holding power of magnet coil at AC	
● at 50 Hz	25 VA
● at 60 Hz	18 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.35
• at 60 Hz	0.41
closing delay	
• at AC	13 50 ms
opening delay	40 04
• at AC	10 21 ms
arcing time	10 20 ms Standard A1 - A2
control version of the switch operating mechanism	Standard AT - AZ
Auxiliary circuit	
Auxiliary circuit	1
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	1
number of NC contacts for auxiliary contacts instantaneous	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous	
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value	1 10 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value	1 10 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	1 10 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 48 V rated value	1 10 A 6 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 148 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 120 V rated value • at 120 V rated value • at 125 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 10 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 690 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 600 V rated value • at 100 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 10 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A

• at 480 V rated value	96 A
at 600 V rated value	99 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	10 hp
— at 230 V rated value	20 hp
• for 3-phase AC motor	
— at 200/208 V rated value	30 hp
— at 220/230 V rated value	40 hp
— at 460/480 V rated value	75 hp
— at 575/600 V rated value	100 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80
	kA)
— with type of assignment 2 required	gG: 200A (690V,100kA), aM: 100A (690V,100kA), BS88: 160A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	140 mm
width	70 mm
depth	152 mm
required spacing	
with side-by-side mounting	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	0/0.5
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)
connectable conductor cross-section for main contacts	
• solid	2.5 16 mm²
• stranded	6 70 mm²
finely stranded with core end processing	2.5 50 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)

<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
• for main contacts	10 2
<ul> <li>for auxiliary contacts</li> </ul>	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
<ul> <li>safety-related switching on</li> </ul>	Yes
<ul> <li>safety-related switching OFF</li> </ul>	Yes
Certificates/ approvals	

## **General Product Approval**



Confirmation





<u>KC</u>



**Functional EMC Declaration of Conformity Test Certificates** Safety/Safety of Machinery



Type Examination Cer**tificate** 





Type Test Certificates/Test Report

Special Test Certific-

## Marine / Shipping













other Railway **Dangerous Good Environment** 

Confirmation Vibration and Shock **Transport Information Environmental Confirmations** 

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2047-1AG20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2047-1AG20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2047-1AG20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2047-1AG20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2047-1AG20/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2047-1AG20&objecttype=14&gridview=view1







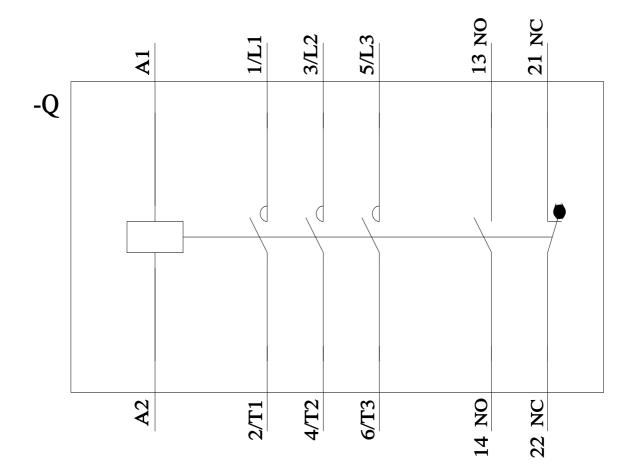

last modified: 2/10/2023 🖸