3RV2411-1GA10-0BA0

## **Data sheet**



CIRCUIT-BREAKER SZ S00, FOR . TRANSFORMER PROT. A-RELEASE4.5...6.3A, N-RELEASE130A, SCREW CONNECTION, STANDARD SW. CAPACITY .

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For transformer protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	500
of auxiliary contacts typical	500
electrical endurance (operating cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
installation dititade at height above sea level maximum	
ambient temperature	
	-50 +60 °C
ambient temperature	-50 +60 °C -50 +80 °C
ambient temperature  ● during operation	
<ul><li>ambient temperature</li><li>during operation</li><li>during storage</li></ul>	-50 +80 °C
<ul> <li>ambient temperature</li> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	-50 +80 °C -50 +80 °C
<ul> <li>ambient temperature</li> <li>during operation</li> <li>during storage</li> <li>during transport</li> <li>relative humidity during operation</li> </ul>	-50 +80 °C -50 +80 °C
ambient temperature	-50 +80 °C -50 +80 °C 10 95 %
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit number of poles for main current circuit adjustable current response value current of the current-	-50 +80 °C -50 +80 °C 10 95 %
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release	-50 +80 °C -50 +80 °C 10 95 %
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release  operating voltage	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release  operating voltage  • rated value	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A 20 690 V 690 V
ambient temperature  • during operation • during storage • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A 20 690 V 690 V 50 60 Hz
ambient temperature  • during operation • during storage • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current rated value	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A 20 690 V 690 V 50 60 Hz
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum  operational current rated value  operational current	-50 +80 °C -50 +80 °C 10 95 % 3 4.5 6.3 A 20 690 V 690 V 50 60 Hz 6.3 A

400014	4.5.111
— at 230 V rated value	1.5 kW
— at 400 V rated value	2.2 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	6 kA
operating short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
at 400 V rated value      at 400 V rated value	100 kA
• at 500 V rated value	100 kA
at 690 V rated value	4 kA
response value current of instantaneous short-circuit trip unit	130 A
	130 A
Short-circuit protection	V
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 400 V	gG 50 A
• at 500 V	gG 40 A
• at 690 V	gG 35 A
Installation/ mounting/ dimensions	30 0071
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm
width	45 mm
	97 mm
depth required spacing	VI IIIII
	0 mm
with side-by-side mounting at the side     for grounded parts at 400 V	0 mm
• for grounded parts at 400 V	
for grounded parts at 400 V     — downwards	30 mm
<ul><li>for grounded parts at 400 V</li><li>— downwards</li><li>— upwards</li></ul>	30 mm 30 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul>	30 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> </ul>	30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> </ul>	30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul>	30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— upwards</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— at the side</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— upwards</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— at the side</li> </ul>	30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 500 V</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— at the side</li> <li>• for live parts at 500 V</li> <li>— downwards</li> <li>• for live parts at 500 V</li> <li>— downwards</li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
<ul> <li>for grounded parts at 400 V <ul> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 400 V <ul> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts at 500 V <ul> <li>downwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 500 V <ul> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 500 V <ul> <li>downwards</li> <li>upwards</li> </ul> </li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 30 mm 9 mm
<ul> <li>for grounded parts at 400 V <ul> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 400 V <ul> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts at 500 V <ul> <li>downwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 500 V <ul> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 500 V <ul> <li>downwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> </ul>	30 mm 30 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 30 mm 9 mm

— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
onnections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals

Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
<ul> <li>for main contacts</li> </ul>	
<ul> <li>solid or stranded</li> </ul>	2x (0,75 2,5 mm²), 2x 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 to 6 mm

design of the thread of the connection screw	
<ul> <li>for main contacts</li> </ul>	M3
Safety related data	
T1 value for proof test interval or service life according to IEC 61508	10 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Pozidriv size 2

Certificates/ approvals

size of the screwdriver tip

General Product Approval Declaration of Conformity Test Certificates

Handle

<u>Confirmation</u> <u>KC</u>

display version for switching status







Type Test Certificates/Test Report

**Test Certificates** 

Marine / Shipping

Special Test Certificate











Marine / Shipping

other

Railway



Confirmation



Confirmation

Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2411-1GA10-0BA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2411-1GA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1GA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2411-1GA10-0BA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1GA10-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2411-1GA10-0BA0&objecttype=14&gridview=view1

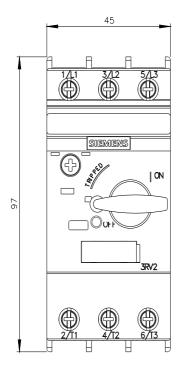

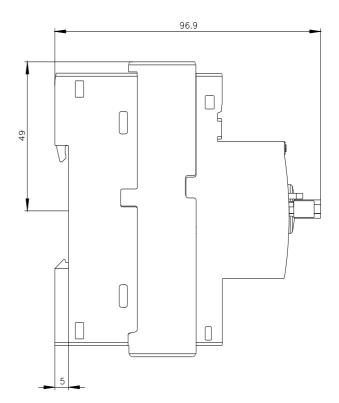

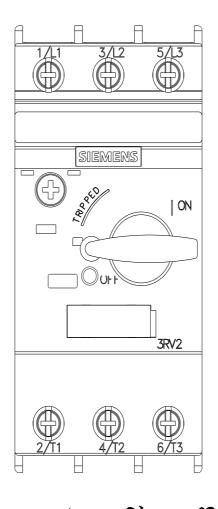

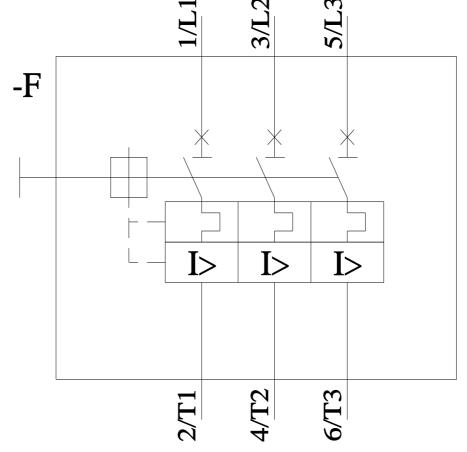

last modified: 11/21/2022 🖸