SIEMENS

Data sheet 3SE6627-2CA01



magnetically-operated switch contact block 25 x 88 mm for door hinge on the right contacts: safety contacts 2 NC, signaling contact 1 NC (31-32), with 8 mm latching connection connector 6-pole, without LED, the matching solenoid 3SE6714-2CA or offset by 90° 3SE6724-2CA

product brand name	SIRIUS		
product designation	Magnetically operated switch		
design of the product	Rectangular sensor unit		
product type designation	3SE66		
suitability for use safety-related circuits	Yes		
General technical data			
product function			
 positive opening 	No		
 control function for downstream devices 	No		
 cross-circuit/short-circuit recognition 	Yes		
type of voltage of the operating voltage	DC		
protection class IP	IP67		
shock resistance according to IEC 60068-2-27	Sinusoidal half-wave 30g / 11 ms		
vibration resistance according to IEC 60068-2-6	10 55 Hz: 1 mm		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	07/01/2006		
height of the sensor	25 mm		
length of the sensor	13 mm		
width of the sensor	88 mm		
material of the active sensor area	Plastic, glass-fiber reinforced thermoplastic		
mechanical installation condition for sensor	can be installed almost flush		
mechanical installation condition for sensor Ambient conditions	can be installed almost flush		
	-25 +70 °C		
Ambient conditions			
Ambient conditions ambient temperature during operation			
Ambient conditions ambient temperature during operation Control circuit/ Control	-25 +70 °C		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage	-25 +70 °C		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value	-25 +70 °C DC 30 V		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value	-25 +70 °C DC 30 V 400 mA		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value	-25 +70 °C DC 30 V 400 mA 10 W		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts	-25 +70 °C DC 30 V 400 mA 10 W 3		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NC contacts safety-related	-25 +70 °C DC 30 V 400 mA 10 W 3 2		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	-25 +70 °C DC 30 V 400 mA 10 W 3 2		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts	-25 +70 °C DC 30 V 400 mA 10 W 3 2		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NC contacts safety-related number of NO contacts for auxiliary contacts number of NO contacts safety-related Enclosure	-25 +70 °C DC 30 V 400 mA 10 W 3 2 0 0		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NC contacts safety-related number of NO contacts for auxiliary contacts number of NO contacts safety-related Enclosure material of the enclosure	-25 +70 °C DC 30 V 400 mA 10 W 3 2 0 0 Plastic, glass-fiber reinforced thermoplastic		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts safety-related Enclosure material of the enclosure opening direction of the door	-25 +70 °C DC 30 V 400 mA 10 W 3 2 0 0 Plastic, glass-fiber reinforced thermoplastic		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NC contacts safety-related number of NO contacts for auxiliary contacts number of NO contacts safety-related Enclosure material of the enclosure opening direction of the door Actuator	-25 +70 °C DC 30 V 400 mA 10 W 3 2 0 0 Plastic, glass-fiber reinforced thermoplastic right		
Ambient conditions ambient temperature during operation Control circuit/ Control type of voltage operating voltage rated value operational current rated value operating power rated value number of NC contacts for auxiliary contacts number of NC contacts safety-related number of NO contacts for auxiliary contacts number of NO contacts safety-related Enclosure material of the enclosure opening direction of the door Actuator design of the actuating element	-25 +70 °C DC 30 V 400 mA 10 W 3 2 0 0 Plastic, glass-fiber reinforced thermoplastic right		

switching frequency	5 Hz				
assured operating distance OFF	17 mr	n			
assured operating distance ON	7 mm				
design of the switching function	NC co	ontact			
number of switching contacts for signaling function	1				
• safety-related	0				
Installation/ mounting/ dimensions					
fastening method	screw	fixing			
Connections/ Terminals					
type of electrical connection	Latch	ing connection 8 mm, 6-p	oole		
Inputs/ Outputs					
number of semiconductor outputs					
 for signaling function 	0				
safety-related	0				
number of outputs as contact-affected switching element					
• as NC contact					
 for signaling function instantaneous contact 	1				
 — safety-related instantaneous contact 	2				
 as NO contact safety-related instantaneous contact 	0				
Safety related data					
B10 value with high demand rate according to SN 31920	12 50	0 000			
Safety Integrity Level (SIL) according to IEC 61508	3				
performance level (PL) according to EN ISO 13849-1	е				
proportion of dangerous failures					
 with low demand rate according to SN 31920 	50 %				
with high demand rate according to SN 31920	50 %				
T1 value for proof test interval or service life according to IEC 61508	20 a				
category according to EN 954-1	4				
Certificates/ approvals					
General Product Approval		ЕМС	Functional Safety/Safety of Ma- chinery	Declaration of Conformity	

Confirmation







Miscellaneous



Declaration of Conformity

other



Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE6627-2CA01

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE6627-2CA01


 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


https://support.industry.siemens.com/cs/ww/en/ps/3SE6627-2CA01

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE6627-2CA01&lang=en

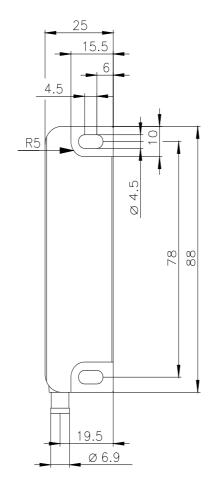


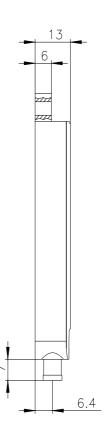



PIN 1	\rightarrow	21
PIN 2	\rightarrow	22
PIN 3	\rightarrow	11
PIN 4	\rightarrow	12
PIN 5	\rightarrow	31
PIN 6	\rightarrow	32



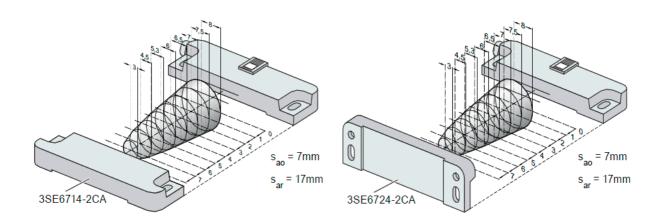

last modified: 10/6/2021 🖸