SIEMENS

Data sheet 3VA9978-0BL31



shunt trip left 48-60V AC 50/60Hz/DC accessory for: 3VA4/5/6

| Model | |
|--|-------------------|
| product brand name | SENTRON |
| product designation | Accessories |
| design of the product | auxiliary release |
| accessories | Auxiliary release |
| General technical data | |
| degree of pollution | 3 |
| overvoltage category | III |
| apparent power consumption / maximum | 30 VA |
| consumed active power / at DC / maximum | 30 W |
| Voltage | |
| surge voltage resistance | 4 kV |
| Mechanical Design | |
| height | 65.1 mm |
| width | 25.7 mm |
| number of slots | 3 |
| depth | 31.2 mm |
| net weight | 91 g |
| tightening torque / with screw-type terminals / minimum | 0.4 N·m |
| tightening torque / with screw-type terminals / maximum | 0.5 N·m |
| Connections according IEC | |
| stripped length | 10 mm |
| AWG number / as coded connectable conductor cross section / for auxiliary contacts | |
| • minimum | 20 |
| • maximum | 16 |
| Connetctions according UL | |
| stripped length [in] | 0.4 in |
| tightening torque [lbf·in] / with screw-type terminals / minimum | 3.5 lbf·in |
| tightening torque [lbf-in] / with screw-type terminals / maximum | 4.4 lbf·in |
| Further information | |

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0BL31

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0BL31


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9978-0BL31


CAx-Online-Generator http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

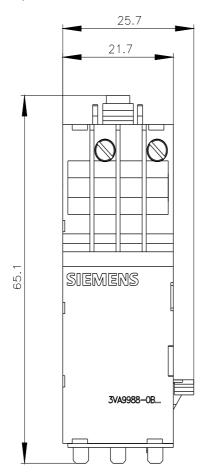

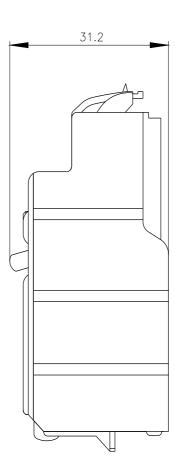

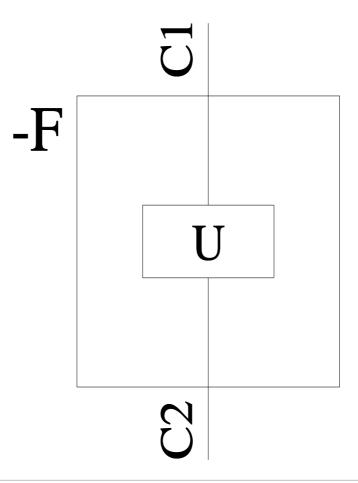

last modified: 4/20/2023 🖸