

# G3VM-63BR/63ER

MOS FET Relays DIP 6-pin, High Current and Low ON-Resistance Type

**MOS FET Relays in DIP 6-pin Packages with SPST-NC Contacts That Achieve Low ON-Resistance and High Switching Capacity of a Mechanical Relay**

- Contact form: 1b
  - Load voltage: 60 V
  - Continuous load current (peak value): 1.2 A (2.4 A) \*
- \* Values in parentheses are for connection C.




**Note:** The actual product is marked differently from the image shown here.

## Application Examples


- Industrial equipment (PLC, Temperature controller, Power supply, etc.)
- Security equipment
- Test & measurement equipment
- Communication equipment

### Package (Unit : mm, average)

DIP 6-pin  
PCB Terminals



Surface-mounting Terminals



**Note:** The actual product is marked differently from the image shown here.

### Model Number Legend

G3VM-□ □ □ □  
1 2 3 4

- |  |  |  |
|--|--|--|
| <b>1. Load voltage</b><br>6 : 60 V                     | <b>2. Contact form</b><br>3 : 1b (SPST-NC) | <b>3. Package</b><br>B : DIP 6-pin with PCB terminals<br>E : DIP 6-pin with surface-mounting terminals |
| <b>4. Additional functions</b><br>R: Low ON resistance |  |  |

## Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *		Stick packaging			Tape packaging	
					Model		Minimum package quantity	Model	
					Connection A, B	Connection C		PCB terminals	Surface-mounting terminals
DIP6	1b	60 V	1.2 A	2.4 A	G3VM-63BR	G3VM-63ER	50 pcs.	G3VM-63ER(TR05)	500 pcs.

\* The AC peak and DC value are given for the load voltage and continuous load current.

**Note:** To order tape packaging for relays with surface-mounting terminals, add "(TR05)" to the end of the model number.


# G3VM-63BR/63ER

## Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-63BR G3VM-63ER	Unit	Measurement conditions	
Input	LED forward current	$I_F$	20	mA		
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3	mA/°C	Ta ≥ 58°C	
	LED reverse voltage	$V_R$	6	V		
	Junction temperature	$T_J$	125	°C		
Output	Load voltage (AC peak/DC)	$V_{OFF}$	60	V		
	Continuous load current	Connection A	$I_o$	1.2	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B				
		Connection C				
	ON current reduction rate	Connection A	$\Delta I_o/^\circ\text{C}$	-12	mA/°C	Ta ≥ 25°C
		Connection B				
		Connection C				
Pulse ON current	$I_{op}$	3	A	t=100 ms, Duty=1/10		
Junction temperature	$T_J$	125	°C			
Dielectric strength between I/O *		$V_{I-O}$	5,000	Vrms	AC for 1 min	
Ambient operating temperature		Ta	-40 to +110	°C	With no icing or condensation	
Ambient storage temperature		Tstg	-55 to +125	°C		
Soldering temperature		—	260	°C	10 s	

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


### Connection Diagram

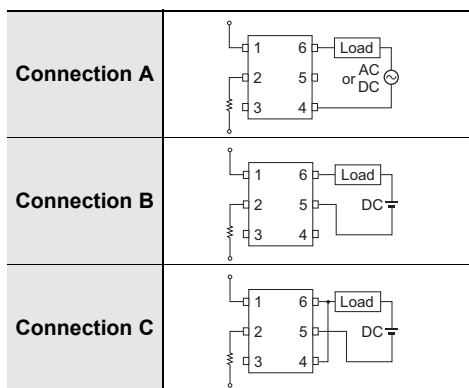

## Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-63BR G3VM-63ER	Unit	Measurement conditions
Input	LED forward voltage	V <sub>F</sub>	Minimum	1.1	V	I <sub>F</sub> =10 mA
			Typical	1.27		
			Maximum	1.4		
	Reverse current	I <sub>R</sub>	Maximum	10	μA	V <sub>R</sub> =6 V
	Capacitance between terminals	C <sub>T</sub>	Typical	70	pF	V=0 V, f=1 MHz
Trigger LED forward current	I <sub>FC</sub>		Typical	0.3	mA	I <sub>OFF</sub> =10 μA
			Maximum	2		
Release LED forward current	I <sub>FT</sub>	Minimum	0.01	mA	I <sub>o</sub> =1.2 A	
Output	Maximum resistance with output ON	R <sub>ON</sub>	Typical	0.3	Ω	I <sub>o</sub> =1.2 A
			Maximum	0.6		
			Typical	0.2		
			Typical	0.1		
Current leakage when the relay is open	I <sub>LEAK</sub>	Maximum	10	μA	V <sub>OFF</sub> =60 V, I <sub>F</sub> =5 mA	
			1		V <sub>OFF</sub> =40 V, I <sub>F</sub> =2 mA	
Capacitance between terminals	C <sub>OFF</sub>	Typical	550	pF	V=0 V, f=1 MHz, I <sub>F</sub> =5 mA	
Capacitance between I/O terminals	C <sub>I-O</sub>	Typical	0.9	pF	V <sub>S</sub> =0 V, f=1 MHz	
Insulation resistance between I/O terminals	R <sub>I-O</sub>		Minimum	1,000	MΩ	V <sub>I-O</sub> =500 VDC, R <sub>oH</sub> ≤ 60%
			Typical	10 <sup>8</sup>		
Turn-ON time	t <sub>ON</sub>		Typical	0.3	ms	I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *
			Maximum	2		
Turn-OFF time	t <sub>OFF</sub>		Typical	2	ms	I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *
			Maximum	3		

\* Turn-ON and Turn-OFF times

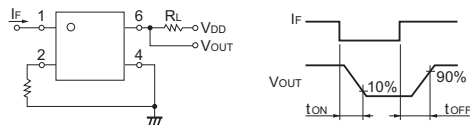

## Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions are measures that take into account the derating of Absolute Maximum Ratings and Electrical Characteristics.


Each item on this list is an independent condition, so they do not simultaneously satisfy several conditions.

Item	Symbol		G3VM-63BR G3VM-63ER	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	48	V
Operating LED forward current	I <sub>F</sub>	Typical	5	mA
		Maximum	10	
Continuous load current (AC peak/DC)	I <sub>o</sub>	Maximum	1.2	A
Ambient operating temperature	T <sub>a</sub>	Minimum	-20	°C
		Maximum	85	


## Spacing and Insulation

Item	Minimum	Unit
Creepage distance	7.0	mm
Clearance distance	7.0	
Internal isolation thickness	0.3	


**LED forward current vs. Ambient temperature**

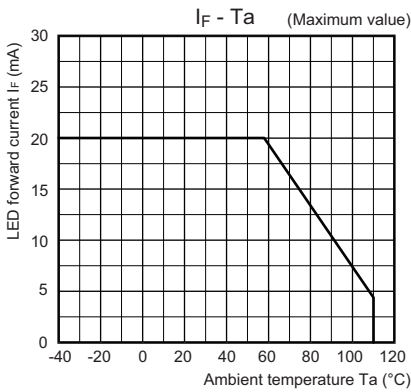


**LED forward current vs. LED forward voltage**

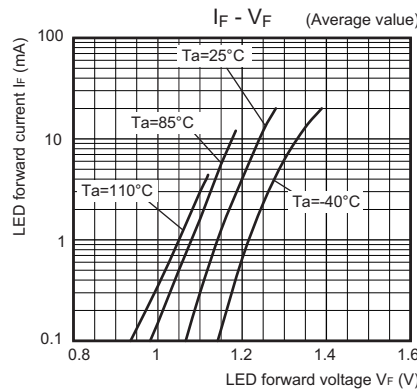


**Continuous load current vs. Ambient temperature**

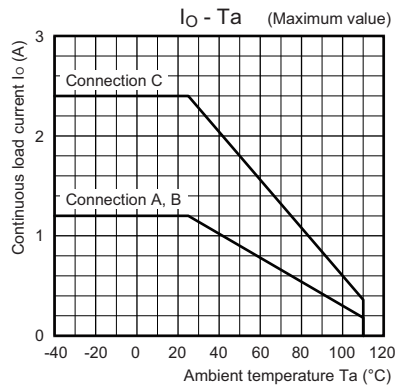


**Continuous load current vs. On-state voltage**

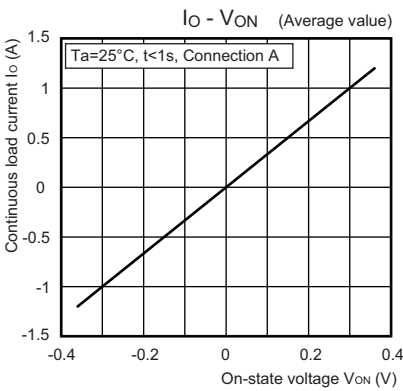


**On-state resistance vs. Ambient temperature**

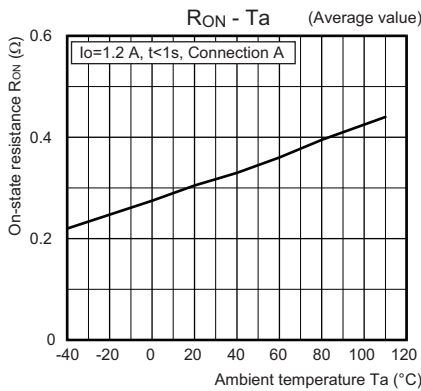


**Trigger LED forward current vs. Ambient temperature**

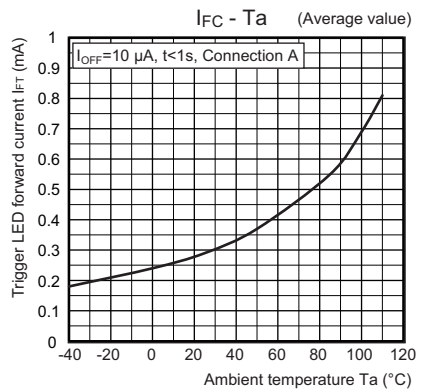


**Turn ON, Turn OFF time vs. LED forward current**

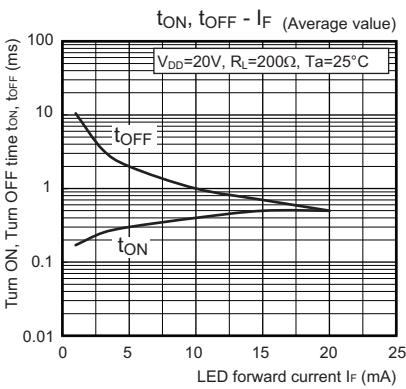


**Turn ON, Turn OFF time vs. Ambient temperature**

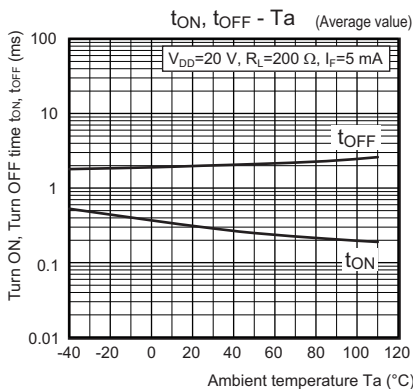


**Current leakage vs. Ambient temperature**

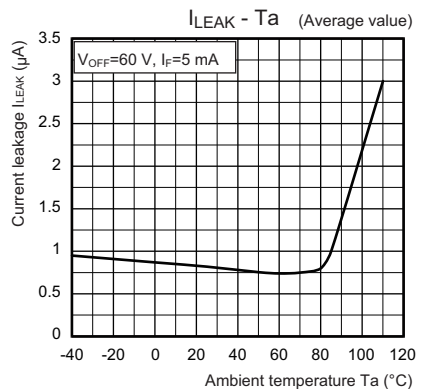

**Current leakage vs. Load voltage**

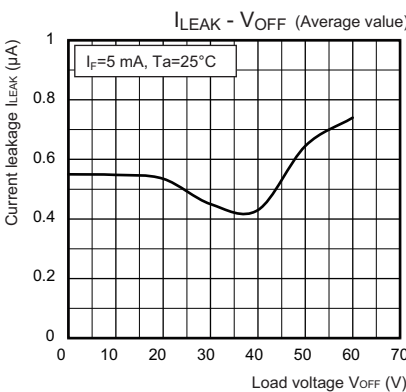

**Current leakage vs. LED forward current**

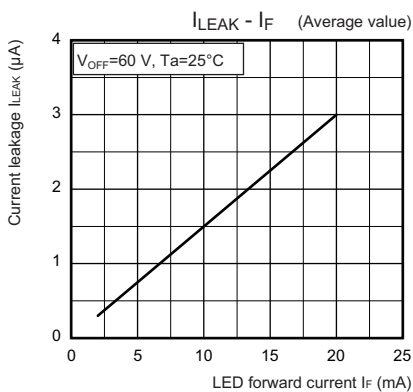


**Note:** About the "Current leakage vs. LED forward current" graph:  
Take note that the current leakage is affected by the LED forward current input due to the internal mechanism of this model.

# Appearance / Terminal Arrangement / Internal Connections


## Appearance

### DIP (Dual Inline Package)

DIP 6-pin

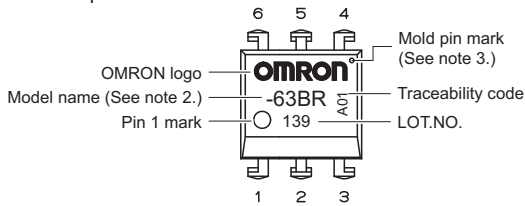

## Terminal Arrangement/Internal Connections (Top View)



**Note 1:** The actual product is marked differently from the image shown here.

**Note 2:** "G3VM" does not appear in the model number on the relay.

**Note 3:** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


## Dimensions

**CAD Data** marked products. 2D drawings and 3D CAD models are available. For CAD information, please visit our website, which is noted on the last page.

(Unit: mm)

### PCB Terminals


Weight: 0.4 g

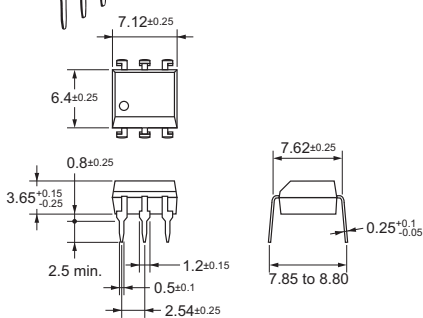

**CAD Data**


### Surface-mounting Terminals

Weight: 0.4 g

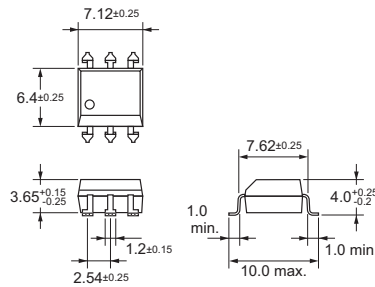


**CAD Data**

### PCB Dimensions (BOTTOM VIEW)



**CAD Data**

### Actual Mounting Pad Dimensions (Recommended Value, Top View)



**CAD Data**

**Note:** The actual product is marked differently from the image shown here.

## Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

---

## **OMRON Corporation**

**Device & Module Solutions Company**

### **Regional Contact**

#### **Americas**

<https://components.omron.com/us>

#### **Asia-Pacific**

<https://components.omron.com/ap>

#### **Korea**

<https://components.omron.com/kr>

#### **Europe**

<https://components.omron.com/eu>

#### **China**

<https://components.omron.com.cn>

#### **Japan**

<https://components.omron.com/jp>