






LED keeps pink flashing

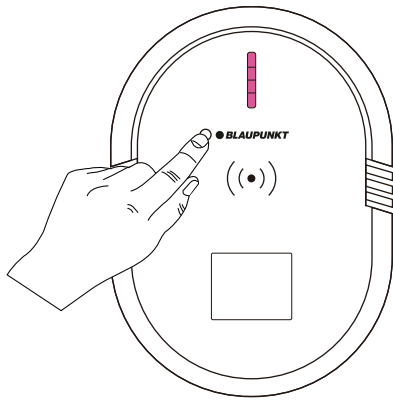


1. Press the black button(8s),
reset WiFi network.

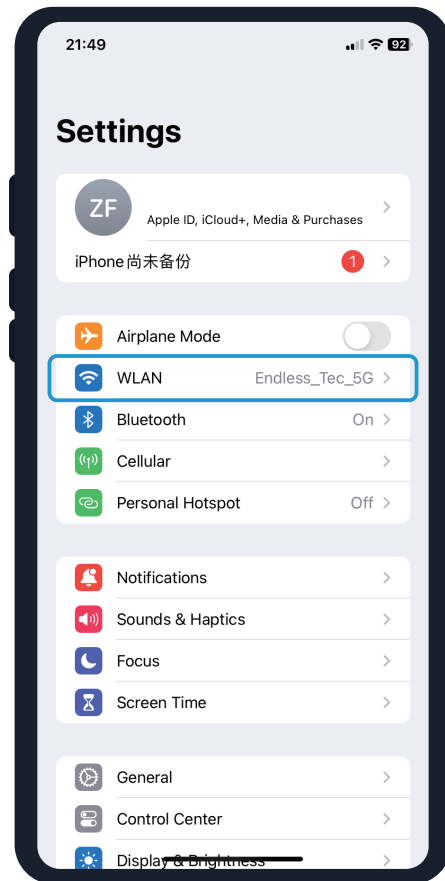

2. Open the WLAN settings
on your phone.

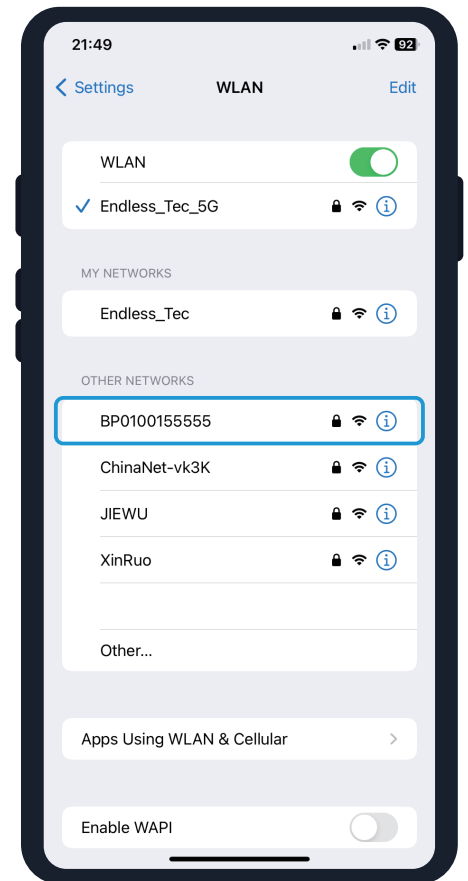


3. Select the WIFI hotspot of the
charger. The WIFI SSID name is
the serial number of it.

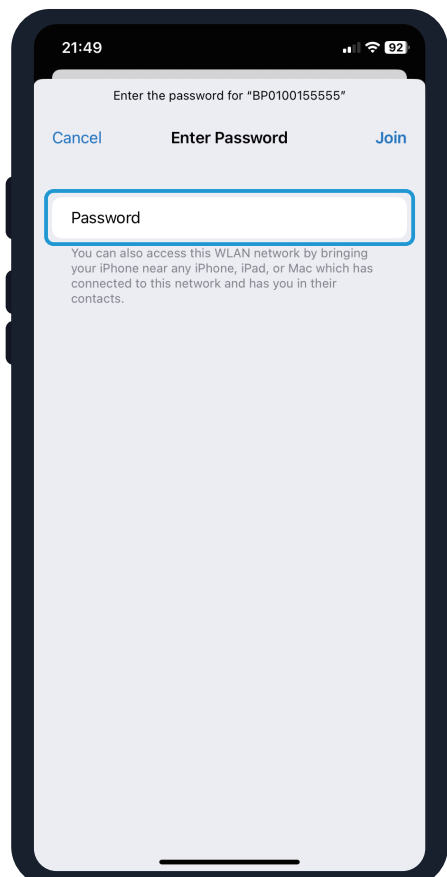


4. Enter the WIFI password to
establish the connection.
The default password is
"12345678".




5. Open your phone's browser,
such as Safari.

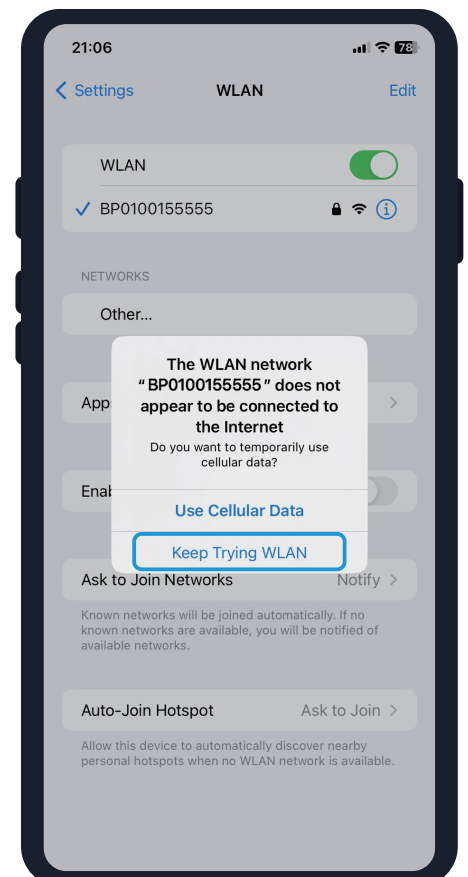


6. If your cell phone pop up a
prompt box like this during
the WIFI configuration,
choose "Keep Trying WLAN".

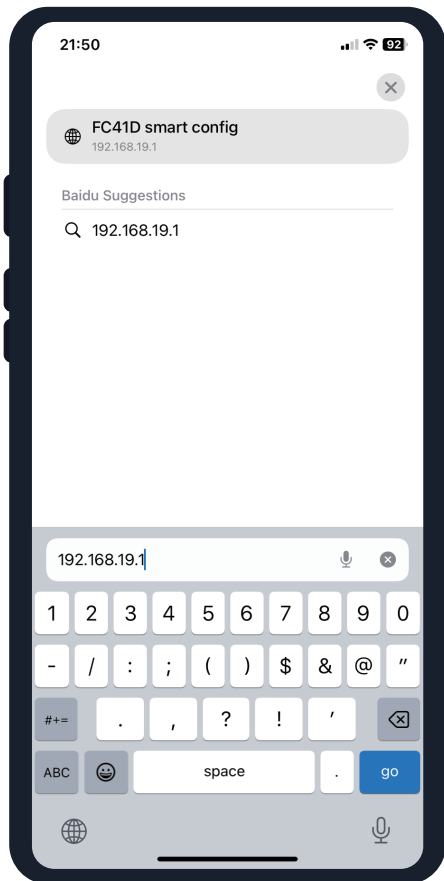

7. Enter the IP address "192.168.19.1" and open the WIFI smartconfig page.

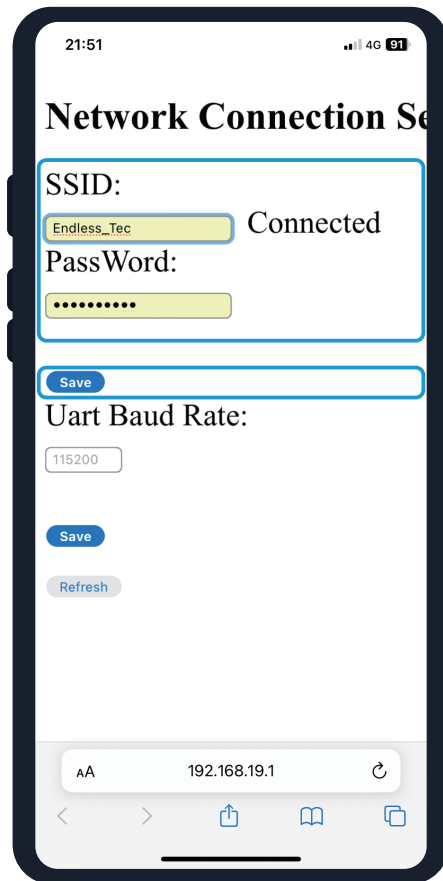

8. Configure the WIFI network your charger will connect to. Enter the WIFI SSID name and password correctly.

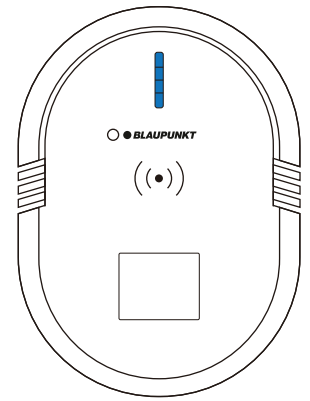

LED turns blue



9. Wait for the charger to finish the connection with Monta server. The led will turn blue when completed.