


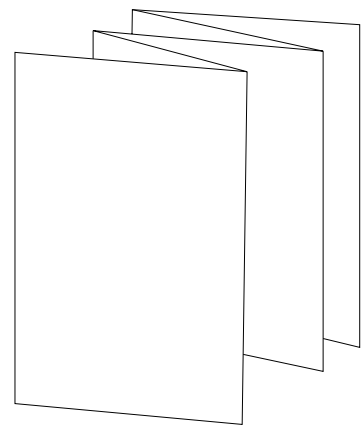

# 折页

## 成品尺寸：100x148mm 材质：70g书纸

100mm

### Panasonic

#### USER'S MANUAL

##### Smart Pet Feeder

Model No. CP-JNF01

#### Table of Contents

|                                                  |    |
|--------------------------------------------------|----|
| Precaution for Use                               | 2  |
| Parts Information                                | 4  |
| Installation Instructions                        | 5  |
| Instructions for Use                             | 8  |
| Washing Instructions                             | 10 |
| Indicator Status Description / Troubleshooting   | 11 |
| Connect to the APP                               | 12 |
| APP - Setting Up Feeding Plan                    | 13 |
| APP - Shared Device                              | 14 |
| APP - Disconnect the Feeder Distribution Network | 15 |
| Important Information                            | 16 |
| Specifications                                   | 18 |
| Package Contents                                 | 19 |

Panasonic reserves the right of final interpretation of the instruction manual.



Thank you for purchasing this product.  
For optimum performance and safety please read these instructions carefully.  
Please keep this manual for future reference.

#### Precaution for Use

Read this product manual carefully before use. Once installed or used, it means that you have carefully read and accepted the following safety instructions. Our company is not responsible for any accidental losses and will not assume any legal responsibility caused by violation operations.

#### WARNING

- If the product is abnormal, please stop using the product immediately and unplug the adaptor.
- Please use in indoor environment and keep away from fire.
- Pets biting wires may cause electricity leakage, please guide your pets do not do so.
- Please stay away from other electrical equipment when using it to prevent damage caused by accidental water splashing.
- The product contains small parts, take care to prevent accidental swallowing.
- AC adaptor
  - To reduce the risk of fire, electric shock or product damage, insert the mains plug fully into the socket outlet.
  - Do not pull, bend, or place heavy items on the lead.
  - Do not handle the plug with wet hands.
  - Hold onto the mains plug body when disconnecting the plug.
  - Do not use a damaged mains plug or socket outlet.
- The mains plug is the disconnecting device. Install this unit so that the mains plug can be unplugged from the socket outlet immediately.
- Unit
  - To reduce the risk of fire, electric shock or product damage, do not let water or other liquids drip or splash inside the unit.
  - Do not expose accessories (battery pack, battery charger, AC adaptor, SD memory card etc.) to rain, moisture, dripping or splashing.
  - Do not place objects filled with liquids, such as vases, on accessories.
  - Use the recommended accessories.
  - Do not remove covers.
  - Do not repair this unit by yourself.
  - Refer servicing to qualified service personnel.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- This appliance must be used only with the AC adaptor supplied with the appliance.

2

#### Precaution for Use

- Do not place this product in a high place to prevent product damage or pet safety issues from falling. At the same time, in order to prevent pets knocking down the product, it is recommended to place it in a corner or against a wall.
- Keep it horizontal, do not overturn the product, otherwise it will cause the product working not properly.
- The inner wall of the bucket is washable with water, but the outer wall of the bucket, buttons, base and other components are not washable with water.
- If you want to stop using it, please unplug the power cord first, pour out the water, wash it and dry it before saving.
- If children use this device, please make sure to use it under the guidance of an adult.
- Except for maintenance personnel, other people are not allowed to repair this product, so as to avoid various accidental injuries.
- The product has been tested at the factory, and it is normal for a little water stains on the parts.
- Battery
  - Do not use rechargeable type batteries.
  - Danger of explosion if battery is incorrectly replaced. Replace only with the type recommended by the manufacturer.
  - Mishandling of batteries can cause electrolyte leakage and may cause a fire.
  - Remove the batteries if you do not intend to use the unit for a long period of time or if the unit is to be powered exclusively by AC power. Store in a cool, dark place.
  - Do not heat or expose to flame.
  - Do not leave the battery(ies) in a car exposed to direct sunlight for a long period of time with doors and windows closed.
  - Do not take apart or short circuit.
  - Do not recharge alkaline or manganese batteries.
  - Do not use batteries if the covering has been peeled off.
  - Do not mix old and new batteries.
  - Do not use different types of batteries at the same time.
  - When disposing of the batteries, please contact your local authorities or dealer and ask for the correct method of disposal.

Disposal of Old Equipment  
Only for European Union and countries with recycling systems

This symbol on the products, packaging, and/or accompanying documents means that used electrical and electronic products must not be mixed with general household waste.

For proper treatment, recovery and recycling of products, please take them to applicable collection points in accordance with your national legislation.


By disposing of them correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment.

For more information about collection and recycling, please contact your local municipality.

Penalties may be applicable for incorrect disposal of this waste, in accordance with national legislation.


3

#### Parts Information

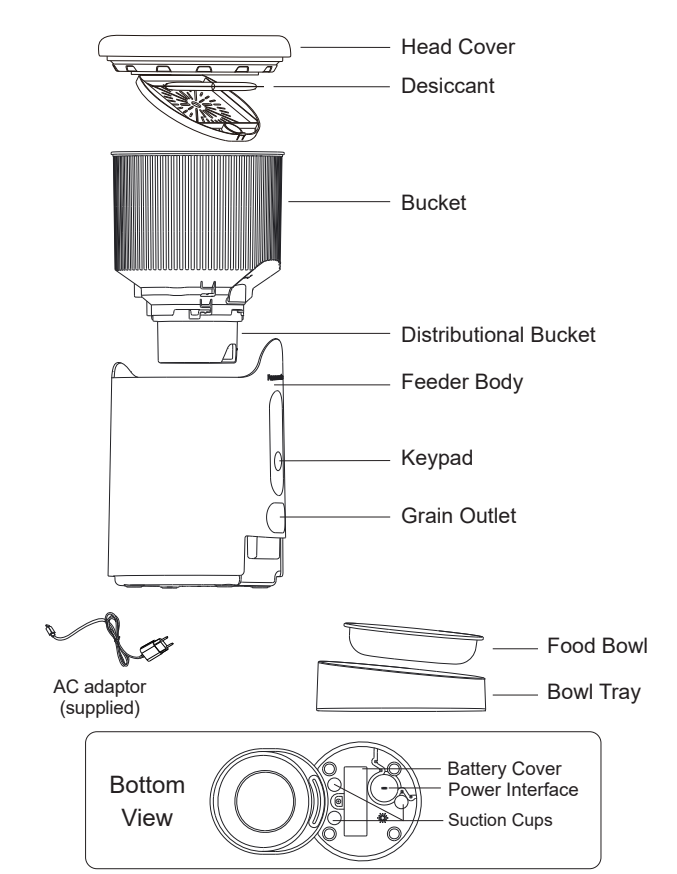


4

#### Installation Instructions

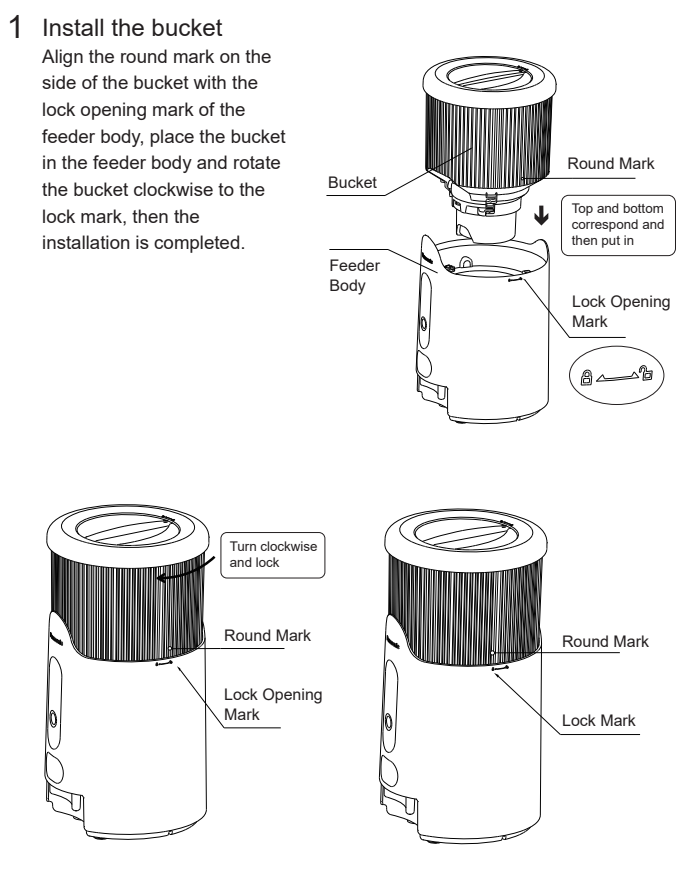


5

#### Installation Instructions

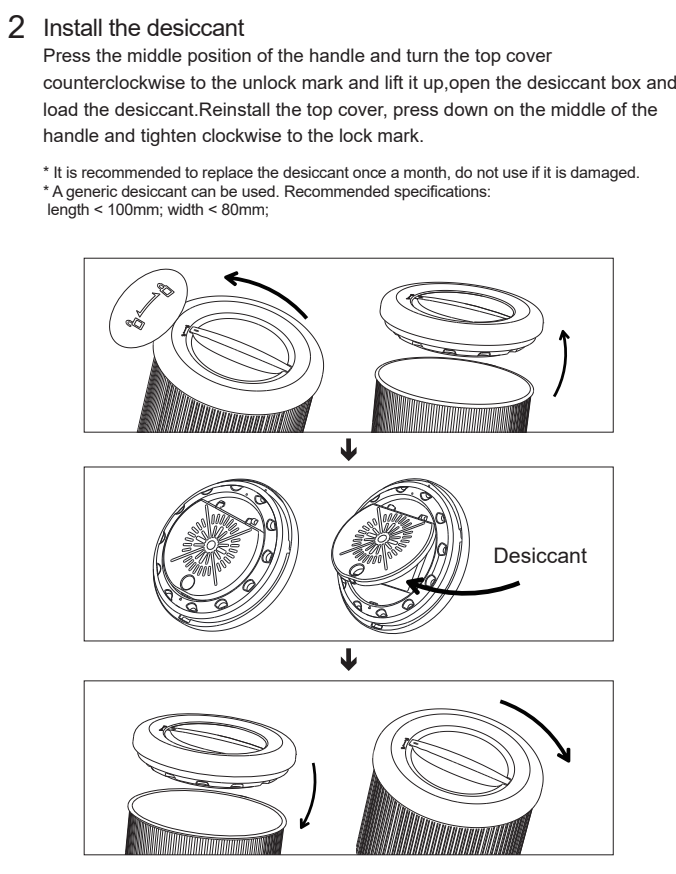


6

#### Installation Instructions

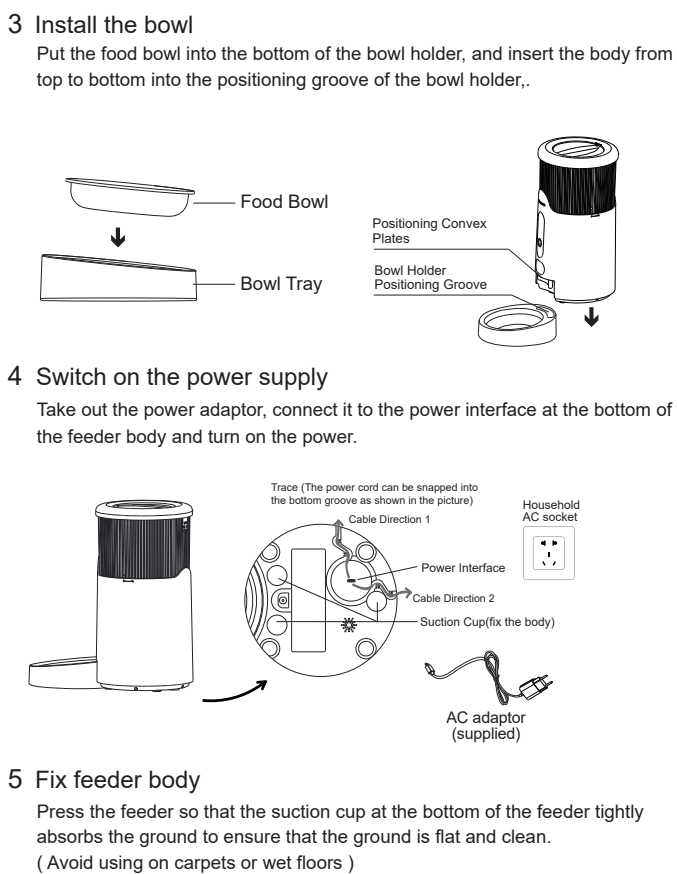


7

#### Instructions for Use

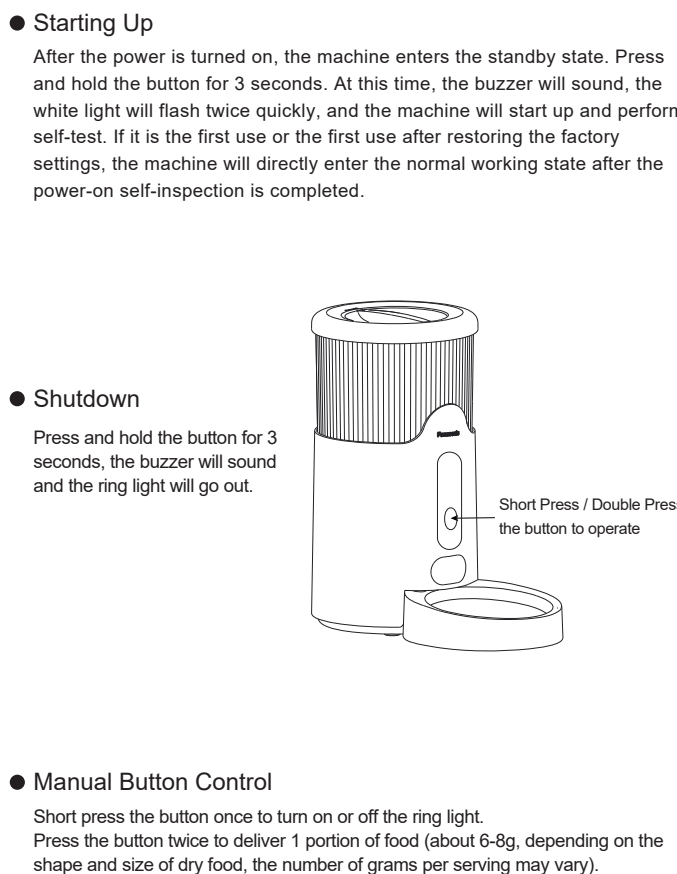


8

#### Instructions for Use

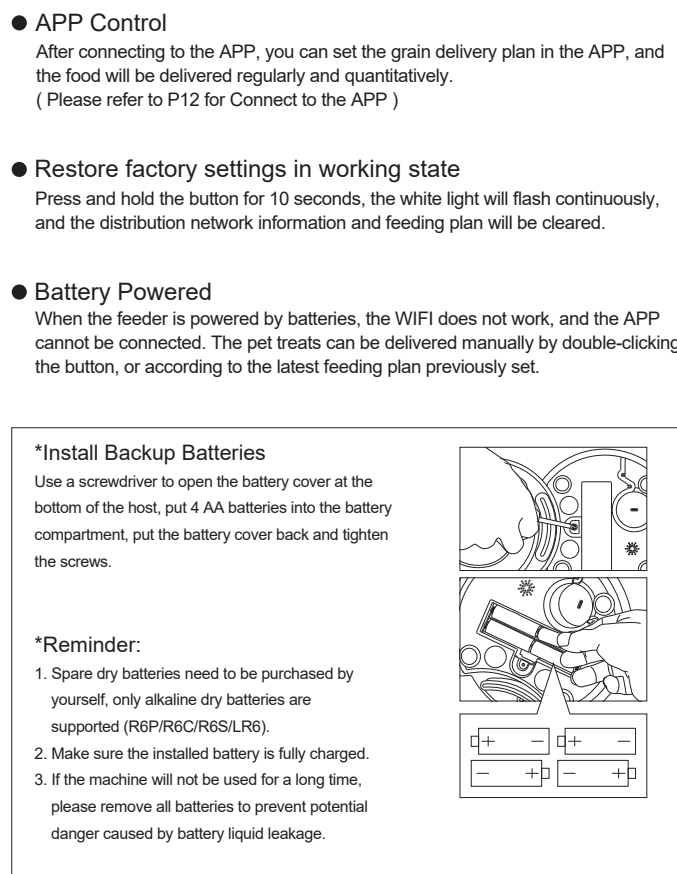

9

#### Washing Instructions

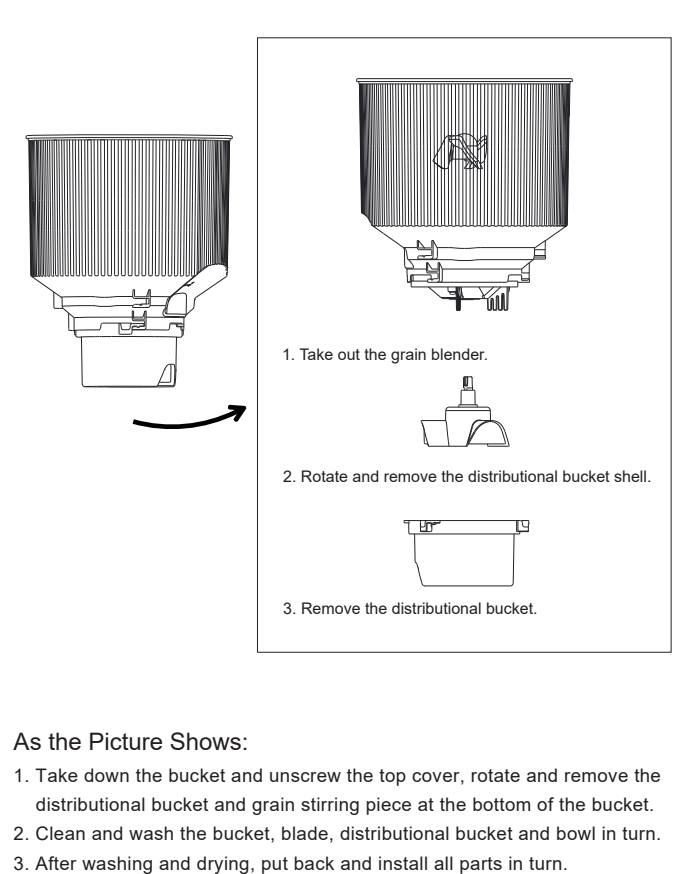

10

#### Indicator Status Description / Troubleshooting

| Indicator Light Status                                         | Working Status                                                                              |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| The indicator light off (power on).                            | Standby                                                                                     |
| The white light flashes twice quickly.                         | Power On Self Test                                                                          |
| The white light continues blink rapidly.                       | Prompt Network distribution                                                                 |
| The white light breathing flicker.                             | Network Distributing                                                                        |
| The white light always on.                                     | Normal working condition.                                                                   |
| The red light always on.                                       | Barrel is not installed correctly.                                                          |
| The red light flashes slowly.                                  | Treats shortage/ Stuck (Please judge according to the amount of left treats in the bucket). |
| The red light flashes quickly for 5 seconds (interval 1 hour). | When the battery is powered) The power is less than 15%.                                    |
| Power On Self Test                                             | The white light flashes twice quickly, and the buzzer sounds.                               |
| Shutdown                                                       | The ring light goes out and the buzzer sounds.                                              |

Before resorting to maintenance service, please kindly check by yourself with the following chart.

| Symptom                                    | Cause(s)                                                                                                                                                                                                                                                                                                                                    | Remedy                                                    |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| No Power                                   | ● The AC adaptor is not connected to the power supply or it is not connected to a power supply securely.                                                                                                                                                                                                                                    | ● Please check that the AC adaptor is connected securely. |
| The ring light is always red.              | Check the bucket is installed correctly.                                                                                                                                                                                                                                                                                                    |                                                           |
| The ring light flashing red quickly.       | Please replace the battery.                                                                                                                                                                                                                                                                                                                 |                                                           |
| The ring light flashing red slowly.        | 1. Check whether the machine is short of treats, if there is a shortage of treats, please replenish it in time.<br>2. If there is enough treats in the machine, please take out the bucket to check whether the treats is stuck. After cleaning the blockage, install the material bucket and power on again.                               |                                                           |
| The ring light flashing white slowly.      | Power on or off press and hold the button again for 10 seconds to enter pairing mode.                                                                                                                                                                                                                                                       |                                                           |
| The feeder cannot connect to the Internet. | 1. Check whether the machine is powered normally;<br>2. Check whether the machine bucket is installed normally;<br>3. Check if the machine is short of treatstock;<br>4. Check whether the WIFI password is correct;<br>5. Check whether the WIFI frequency is 2.4GHz, if the WIFI frequency is 5GHz, please try after changing the router. |                                                           |

11

#### Connect to the APP

- Connect to the APP
- 1 Search the "Smart Life" APP in major mobile application markets or scan the QR code to download and install it.



- 2 After the installation is completed, register an account and log in to the APP.
- 3 Click "Add Device" on the home page, turn on the phone's Bluetooth and WIFI, and ensure that the feeder is in the network distribution state, and bind the device according to the APP prompt.

\*Due to the upgrade and update of the APP, the actual operation may be slightly different from the above description, please operate according to the current guidelines in the APP.

\*A feeder can only be connected to one of the APP or the applet. If you need to switch from the APP to the applet or from the applet to the APP, you need to disconnect the distribution network between the APP and the feeder or the connection between the applet and the feeder distribution network.

\*Panasonic Corporation assumes no responsibility for data and/or information leakage that occurs during wireless transmission.

\*Android phones are recommended to use Android 9.0 or above; Apple phones are recommended to use iOS 10.0 or above; Hongmeng phones are recommended to use Harmony 2.0 or above.


12

#### APP - Setting Up Feeding Plan

The APP allows users to set up a 7 day meal plan and automatically dispense pet food at scheduled intervals by selecting preferred portion size. (1= small portion & 5 = large portion)

The user can also manually dispense food via the APP at any time.

\* The APP user interface may differ from the following visual example due to APP updates.

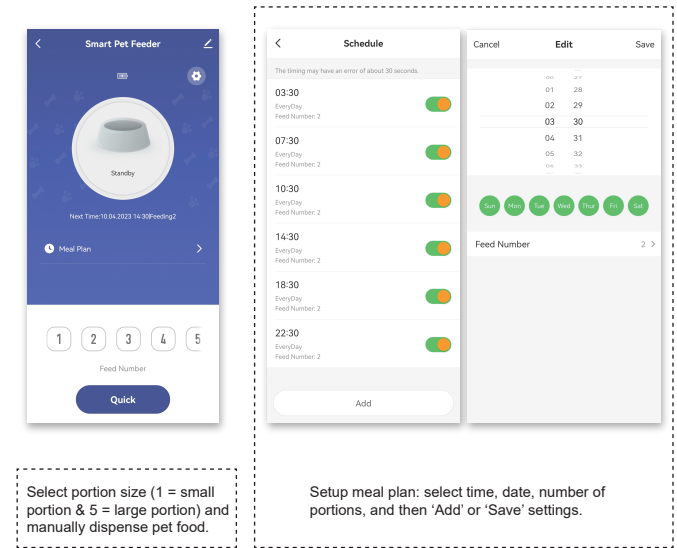


Select portion size (1 = small portion & 5 = large portion) and manually dispense pet food.

13

#### APP - Shared Device

Shared equipment can invite other members to control the feeder through the APP. Select the corresponding feeder on the home page to enter the main feeding interface, click the edit icon in the upper right corner to find the "Shared Device" column, click to enter the shared device page, click "Add Share" to send to other members via SMS, and other members click the invite link Device sharing is now completed.


(Note: The upper limit of sharing is 20 people. If the actual operation does not match the above description, please refer to the actual operation.)

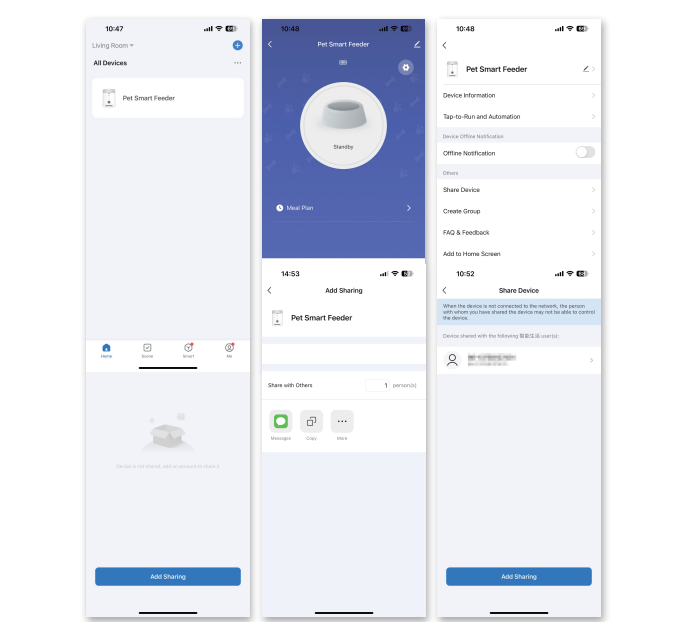

14

#### APP - Disconnect the Feeder Distribution Network

To disconnect the distribution network connection between the feeder and the device, click "Home" in the lower left corner, then click "...". In the upper right corner to select the feeder, click "Remove Device" at the bottom, and confirm that the feeder and the device are disconnected from the distribution network open.

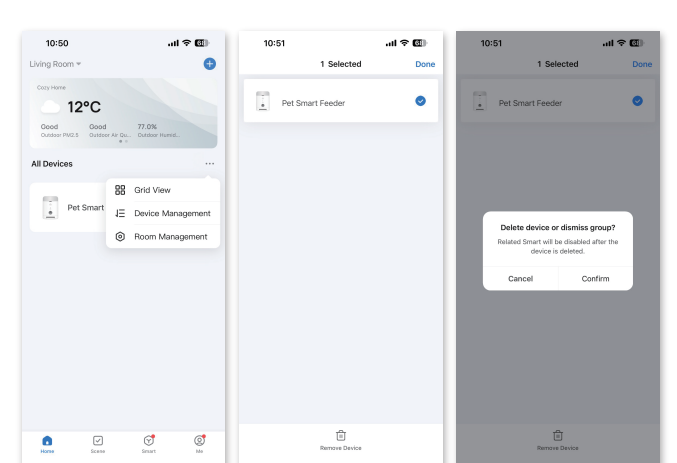


15

#### Important Information

- Recommendation on pet food types and pet food sizes
  - This product is only applicable to dry pet food, do not use with wet food, otherwise it may cause equipment failure.
  - This feeder supports dry pet food up to 12mm in diameter (including freeze dried pet treats).
  - Do not exceed the maximum line indication when replenishing pet food in the bucket.
  - The difference in shape and size of the dry pet food will cause a variation in the amount of food dispensed per serving.
  - When assembling the feeder propeller blade, ensure a click sound is heard when pushing into the base (as shown in the right image).
- Alerts will be displayed in your APP User Interface (UI) under the following scenarios ;
- If your Smart Pet Feeder is :
  - 1) working using AC adaptor power supply.
  - 2) paired to the device.
  - 3) and connected to your network.


Additional warnings include:

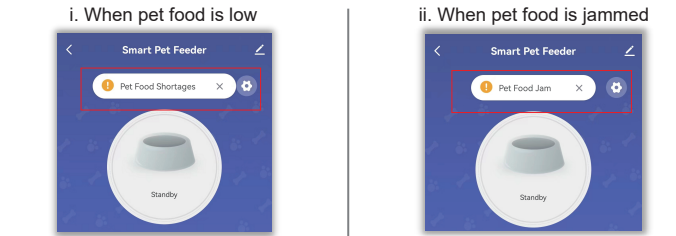

16

#### Important Information

Steps below serve as a guide to change the preferred name of your Smart Pet Feeder. The APP UI may vary depending on your device and APP version.

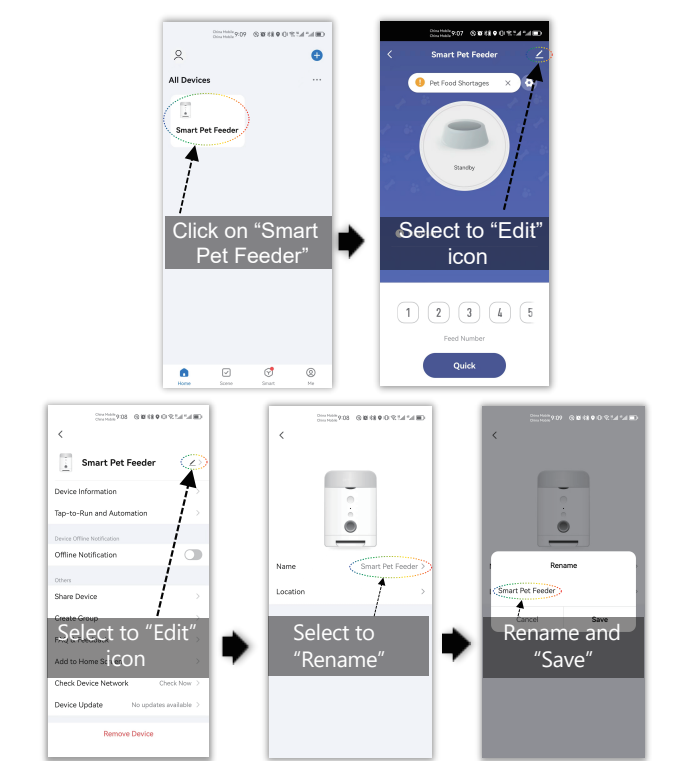

17

#### Specifications


Power Supply for main unit DC 5.0 V= 1.0 A  
Power Supply for adaptor 100-240 V~ 50/60 Hz 0.25 A  
Power Consumption (normal use) 5 W  
Power Consumption in standby modes < 0.5 W  
Dimensions (L x W x H)  
Unit 338 x 190 x 360 (mm)  
Carton Box (individual) 215 x 215 x 440 (mm)  
Net Weight with Adaptor 1.86 kg  
Operation Environment Temperature 5℃~40℃  
Relative Humidity 5%~90%  
Bluetooth version V4.2  
Bluetooth frequency band 2.402~2.4835 GHz  
Bluetooth maximum power 8.9 dBm  
Wlan mode IEEE802.11B/G/N20  
Wlan frequency band 2.40~2.4835 GHz  
Wlan maximum power 18.2 dBm

18

#### Package Contents

| Smart Pet Feeder | AC adaptor | Operating Instructions |
|------------------|------------|------------------------|
| 1                | 1          | 1                      |
| Food Bowl        | Bowl Tray  | Desiccant              |
| 1                | 1          | 1                      |
| Warranty         |            |                        |
| 1                |            |                        |

#### Unique Code of Smart Pet Feeder ( Example )

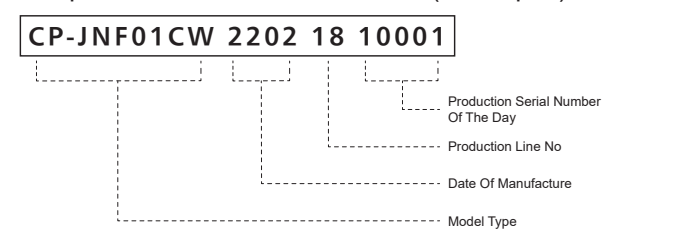

19

#### Declaration of Conformity (DoC)

Hereby, "Panasonic Marketing Europe GmbH" declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:  
<https://www.ptc.panasonic.eu/compliance-documents>

Contact to Authorised Representative:  
Panasonic Marketing Europe GmbH,  
Panasonic Testing Centre,  
Winnberg 15, 22525 Hamburg, Germany

Manufactured by:  
Authorized Representative in Europe:



Web Site: <http://www.panasonic.com>

Version NO.: V1.0