

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	G3G133-RO15-04	
Motor	M3G055-BD	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	5750
Power consumption	W	85
Current draw	A	0.75
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)


Technical description

Weight	1.14 kg
Size	133 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+ = Dry – temperature-controlled indoor spaces + additional load
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	EAC

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Product drawing

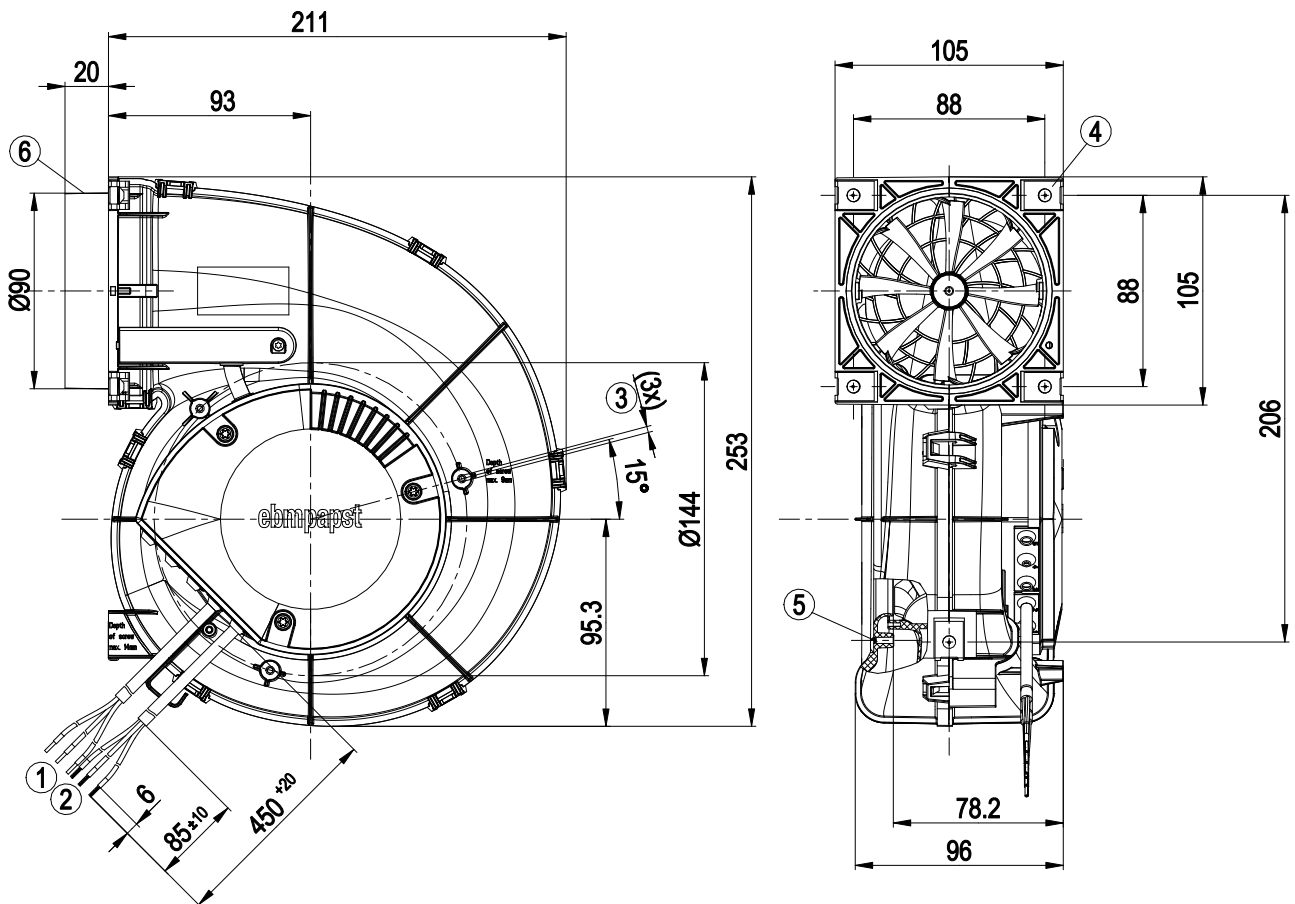


1	Cable PVC AWG22 3x splice
2	Cable PVC AWG20 3x splice
3	Tapping hole prepared for dia. 4 mm self-tapping screw for fastening plastics, max. screw-in depth 9 mm
4	5x sheet metal nut for thread EN ISO 1478-ST4.8 (max. screw length 14 mm plus material thickness of mounting)
5	Screw-on domes are only permissible for Flowgrid!
6	Connecting sleeve not suitable for installation with pipe clamps

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Connection diagram

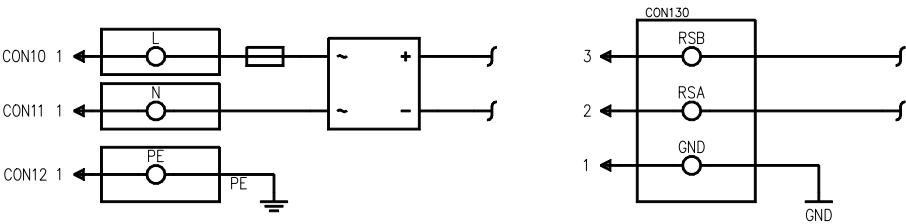


No.	Conn.	Designation	Color	Function/assignment
CON10	1	L	black	Power supply, phase, see nameplate for voltage range
CON11	1	N	blue	Power supply, neutral conductor, see nameplate for voltage range
CON12	1	PE	green/yellow	Protective earth
CON130	3	RSB	brown	RS485 interface for MODBUS, RSB; SELV
CON130	2	RSA	white	RS485 interface for MODBUS, RSA; SELV
CON130	1	GND	blue	Reference ground for control interface, SELV

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Curves: Air performance

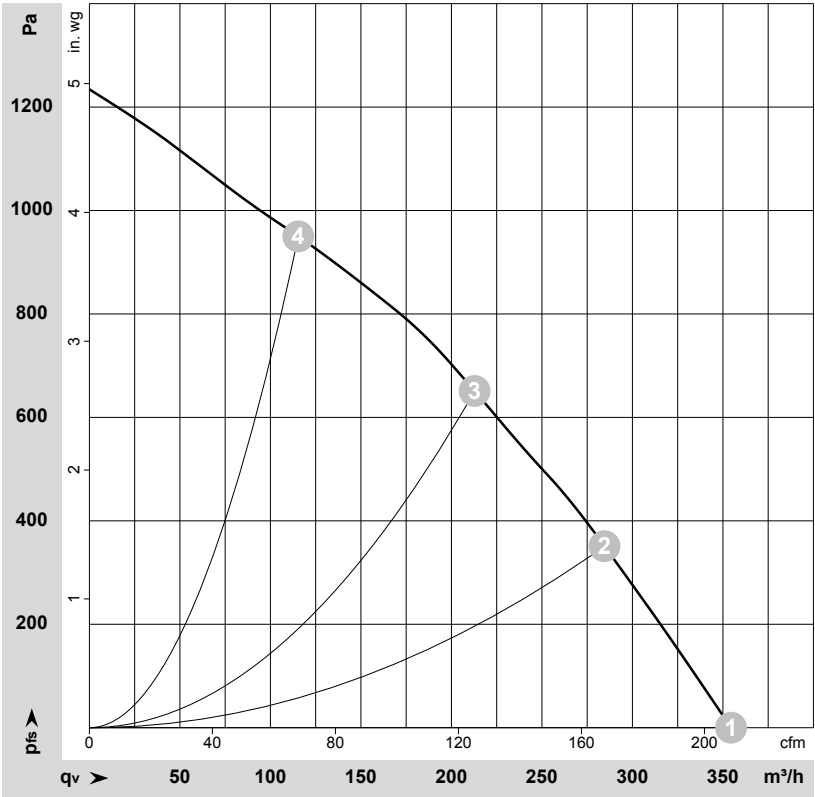

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-196714-1
Date: 2018-12-19
Nozzle: 13300-1-2950

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	5805	83	0.73	75	79	82	355	0	210	0.00
2	1~	230	50	5755	85	0.75	70	75	78	285	350	170	1.41
3	1~	230	50	5750	85	0.75	68	74	75	215	650	125	2.61
4	1~	230	50	6010	77	0.69	69	76	81	115	950	70	3.81


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

Curves: Air performance 50 Hz

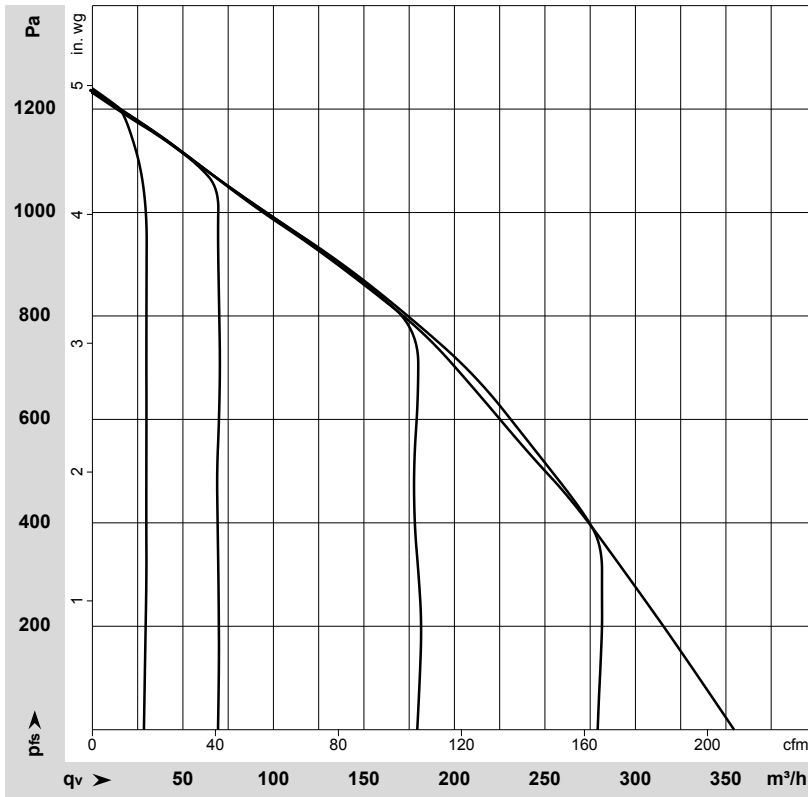

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-196714-1

Date: 2018-12-19

Nozzle: 13300-1-2950

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.