
HE Series Reed Relays

- **Features: High Voltage Relay, Through-Hole / Axial Wire Option, Compact Design, Special Pin-Outs**
- **Applications: High Voltage Test Sets, Cable Testers, Medical Equipment & Others**
- **Markets: Medical, Test and Measurement & Others**

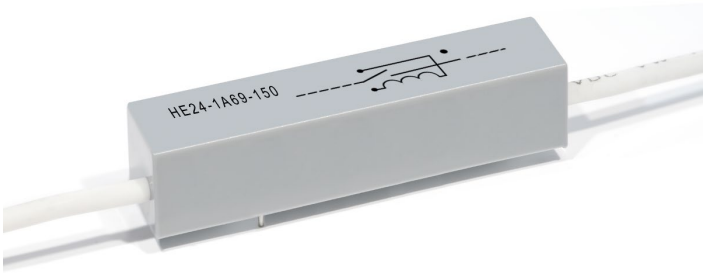

Part Description: HE00-0X00-000

Nominal Voltage	Contact Quantity & Contact Form	Switch Model	Pin Out
05, 06, 12, 24, 48	1A, 1B, 2A	69, 83	02, 03, 150, 300

Customer Options	Switch Model		Unit
Contact Data (@ 20°C)	69 (A-Dry)	83 (A-Dry)	
Contact Material	Rhodium	Rhodium	
Rated Power (max.) Any DC combination of V&A not to exceed max. rated power	50	50	W
Switching Voltage (max.) DC or peak AC	10,000	7,500	V
Switching Current (max.) DC or peak AC	3.0	3.0	A
Carry Current (max.) DC or peak AC	5.0	5.0	A
Contact Resistance (max.) @ 0.5V & 10mA, Measured with 40% Pull-In Overdrive	150	150	mOhm
Breakdown Voltage (min.) (upon request)* According to EN60255-27	15	15	kVDC
Operating Time (max.) Including Bounce, Measured w/40% Pull-In Overdrive	3.0	3.0	ms
Release Time (max.) Measured without Coil Suppression	1.5	1.5	ms
Insulation Resistance (min./typ.) Rh<45%, 100V Test Voltage	10^{12}	10^{12}	OHE
Capacitance (typ.) @ 10kHz across open Switch	1	1	pF


USA: +1 866.782.6339 | info@standexelectronics.com EMEA: +49 (0)7733 9253 200 | salesemea@standexelectronics.com APAC: +86 21/37606000 | salesasia@standexmeder.com

HE Series Reed Relays


Coil Data (at 20°C)		Coil Voltage (VDC)		Coil Resistance (OHE)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Coil Power (mW)	Coil Inductance (mH)
Contact Form	Switch Model	Nominal	Max.	Typical (± 10 %)	Max.	Min.	Nominal	Nominal
1A	69	05						
		12		110	9.0	1.0	1,31	
		24		465	18.0	2.0	1,24	
	83	05						
		12		260	9.0	1.0	554	
		24		1050	18.0	2.0	554	
1B*	69	05						
		12		260	9.0	1.0	554	
		24		1	18.0	2.0	548	
	83	05						
		12		250	9.0	1.0	351	
		24		1	18.0	2.0	378	
2A	83	12		140	9.0	1.0	1	


The Pull-In, Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C
* Re-closure of Form B may occur if the max. coil voltage is exceeded. Coil polarity on Form B must be observed. Pin 2 is positive.

Relay Data (@ 20°C)		Unit
Dielectric Strength Coil/Contact (min.) According to EN60255-27	10	kVDC
Insulation Resistance Coil/Contact (min.) Rh<45%, 200V Test Voltage	10^{12}	OHE
Capacitance Coil/Contact (typ.) @10 kHZ	1.2	pF
Shock Resistance (max.) 1/2 sine wave, 6md, 3-axis	50	g
Vibration Resistance (max.) 10 – 2,000 Hz	20	g
Operating Temperature (max.) Surrounding of the relay's housing	-20 to 70	°C
Storage Temperature (max.) Surrounding of the relay's housing	-35 to 95	°C
Soldering Temperature (max.) 5 sec. max.	260	°C
Washability Aqueous rinse suitable. Proper drying necessary.	Fully Sealed	

Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	

Dimensions (in mm [inch]) Tolerances acc. to ISO 2768-m

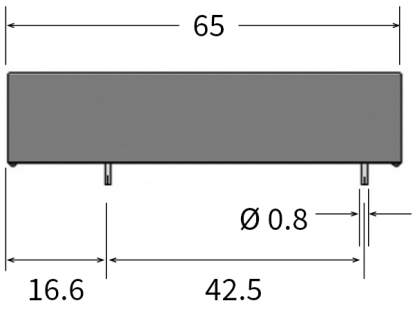





USA: +1 866.782.6339 | info@standexelectronics.com EMEA: +49 (0)7733 9253 200 | salesemea@standexelectronics.com APAC: +86 21/37606000 | salesasia@standexmeder.com

HE Series Reed Relays

Life Test Data (*Load increase reduces life expectancy of Reed Switches)

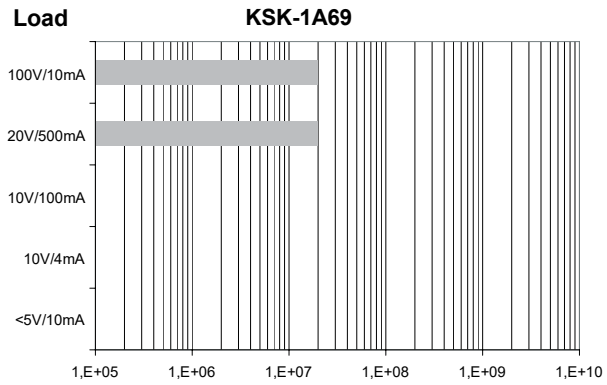

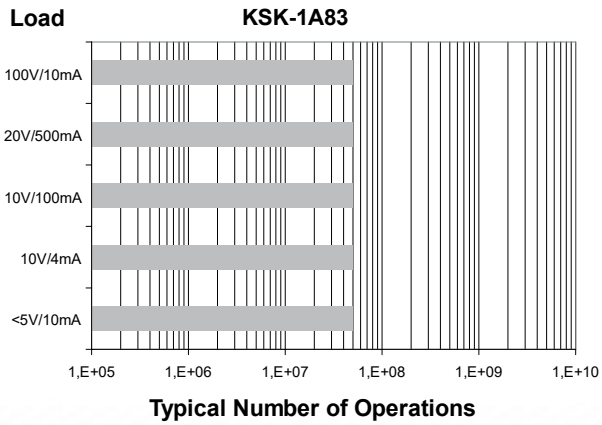


Pin-Out (Top View)


Form A

View from top of component
2,5 mm [0,098"] pitch grid

HExx-1Axx




HExx-1Axx-03




View from top of component
2,54 mm [0,100"] pitch grid

HExx-1Axx-02




HExx-1Axx-150




Form B

View from top of component
2,5 mm [0,098"] pitch grid

HExx-1Bxx



HExx-1Bxx-150



Please note: All technical specifications on this series datasheet refer to the standard product range. Modifications in the sense of technical progress are reserved. For general information only. For more specific information, please consult the product datasheet, available upon request.

This series datasheet could contain technical inaccuracies or typographical errors. Changes are periodically made to the information herein. These change will be incorporated in future revisions.

For deviating values, most current specifications and products please contact your nearest sales office.

Handling & Assembly Instructions

- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.

USA: +1 866.782.6339 | info@standexelectronics.com EMEA: +49 (0)7733 9253 200 | salesemea@standexelectronics.com APAC: +86 21/37606000 | salesasia@standexmeder.com