



Askari

Connection Details


Spezifikation	Flange	Panel
Tonart	Dauerton	Dauerton
Betriebsspannung	12VDC bei 9- 15VDC	12VDC bei 9- 15VDC
	24VDC bei 15- 28VDC	24VDC bei 15- 28VDC
Stromaufnahme	18mA bei 24VDC	18mA bei 24VDC
Lautstärke	Siehe Tabelle	Siehe Tabelle
Töne	32	32
Synchronisierung	Started Synchron	Started Synchron
Betriebstemperatur	-25°C bis +70°C	-25°C bis +70°C
Leitungsüberwachung	Umgekehrte Polarität	Umgekehrte Polarität
Material	ABS Plastik	ABS Plastik
Schutzklasse	IP65	IP65
Gewicht	85g	95g

1=Closed
 0=Open

Max Volume Control

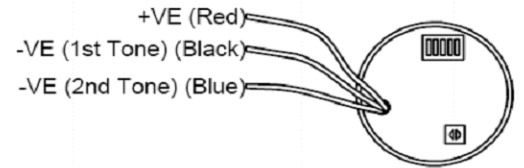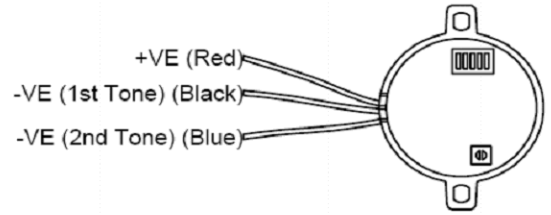

Abmessungen:

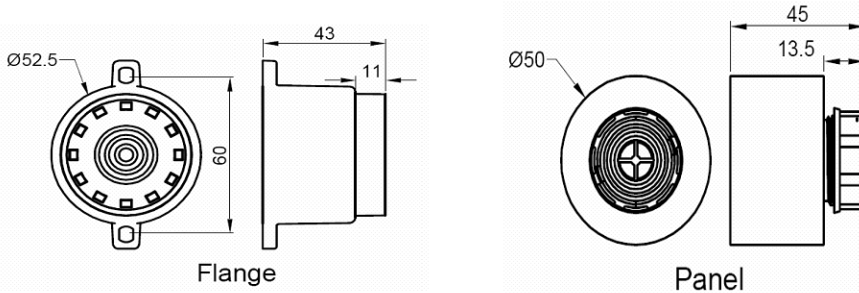

Tones table

No.	Tone		2nd Tone	Code 12345	Description	Typ current (avg mA)		Typ S.P.L ±2dB at 1m	
						12V	24V	12V	24V
1	Alternating	800/970Hz at 2Hz	14	11111	BS5839 Part 1 1988	10	18	91	95
2	Sweeping	800/970Hz at 7Hz	14	11110	Fast sweep (LF) BS5839 Part 1 1988	10	18	94	97
3	Sweeping	800/970Hz at 1Hz	14	11101	Medium sweep (LF) BS5839 Part 1 1988	10	18	94	97
4	Continuous	2850Hz	14	11100		16	32	102	105
5	Sweeping	2400-2850Hz at 7Hz	4	11011	Fast sweep	18	30	101	106
6	Sweeping	2400-2850Hz at 1Hz	4	11010		17	30	101	106
7	Slow Whoop		14	11001	Slow whoop	12	20	92	96
8	Sweep	Sweep 1200-500Hz at 1Hz	14	11000	Din tone	9	16	91	95
9	Alternating	2400/2850Hz at 2Hz	4	10111		19	30	100	105
10	Intermittent	970Hz at 1Hz	14	10110	Back-up Alarm (LF) BS5839 Part 1 1988	9	12	89	93
11	Alternating	800/970Hz at 1Hz	14	10101	BS5839 Part 1 1988	10	18	90	95
12	Intermittent	2850Hz at 1Hz	4	10100	Back-up Alarm (HF)	14	24	101	105
13	Intermittent	970Hz at 1/4s on 1s off	14	10011	BS5839 Part 1 1988	5	8	85	90
14	Continuous	970Hz	14	10010	BS5839 Part 1 1988	11	20	90	94
15	Alternating	554Hz for 100mS and 440Hz for 400mS	14	10001	French Fire sound	7	12	86	91
16	Intermittent	660Hz 150mS On/150mS Off	16	10000	Swedish Alarm tone	6	9	83	88
17	Intermittent	660Hz for 1.8S On/1.8S Off	17	01111	Swedish Alarm tone	7	12	85	90
18	Intermittent	660Hz for 6.5S On/13S Off	18	01110	Swedish Alarm tone	8	14	86	91
19	Continuous	660Hz	19	01101	Swedish Alarm tone	8	14	86	91
20	Alternating	554/440Hz at 1Hz	20	01100	Swedish Alarm tone	7	13	86	91
21	Intermittent	660Hz at 1Hz	21	01011	Swedish Alarm tone	6	10	84	89
22	Intermittent	2850Hz 150mS On/100mS Off	14	01010	Pelican Crossing	13	22	100	105
23	Sweep	800-970Hz at 50Hz	14	01001	Low Frequency Buzz BS5839 Part 1 1988	10	18	92	96
24	Sweep	2400-2850Hz at 50Hz	4	01000	High Frequency Buzz	14	25	100	106
25	Intermittent	970Hz 500mS On/500mS Off	25	00111	ISO 8201 Low Frequency BS5839 Part 1 1988	9	14	88	92
26	Intermittent	2850Hz 500mS On/500mS Off	26	00110	ISO 8201 High Frequency	12	20	100	104
27	Continuous	4kHz	27	00101		18	35	97	101
28	Alternating	800/970 at 2Hz	10	00100	FP1063.1 - Telecom	10	17	91	95
29	Alternating	988/645 at 2Hz	988Hz	00011	Symphoni tones	8	17	90	97
30	Alternating	510/610 at 2Hz	510Hz	00010	Squashni Micro	6	12	91	98
31	Sweeping	300-1200 at 1Hz	31	00001		6	13	89	96
32	Continuous	4kHz	32	00000		18	35	97	101

• Frequency tolerances ±0.15%. Volume control providing up to 20dB attenuation fitted as standard. Figures based on 20°C operating temperature

Tones table

		2 nd	Code		Typical current (avg. mA)		Typical S.P.L. @ 1M	
					12V	24V	12V	24V
1	Alternating tones 800/970Hz at 2Hz	14	11111	BS5839 Part 1 1988	10	18	94	101
2	Sweeping 800/970Hz at 7Hz	14	11110	Fast sweep (LF) BS5839 Part1 1988	10	18	95	102
3	Sweeping 800/900Hz at 1Hz	14	11101	Medium sweep(LF) BS5839 Part 1 1988	10	18	96	102
4	Continuous at 2850Hz	14	11100		16	32	105	111
5	Sweeping 2400-2850Hz at 7Hz	4	11011	Fast sweep	18	30	104	111
6	Sweeping 2400-2850 at 1Hz	4	11010		17	30	104	111
7	Slow Whoop	14	11001	Slow whoop	12	20	93	99
8	Sweep 1200-500Hz at 1Hz	14	11000	Din tone	9	16	92	99
9	Alternating tones 2400/2850 2 Hz	4	10111		19	30	103	110
10	Intermittent tone of 970Hz at 1Hz	14	10110	Back-up Alarm (LF) BS5839 Part 1 1988	9	12	94	101
11	Alternating tones 800/970Hz at 1Hz	14	10101	BS5839 Part 1 1988	10	18	94	101
12	Intermittent tone at 2850Hz at 1Hz	4	10100	Back-up alarm (HF)	14	24	103	110
13	970Hz at 1/8 on / 1S off	14	10011	BS5839 Part 1 1988	5	8	90	97
14	Continuous at 970Hz	14	10010	BS5839 Part 1 1988	11	20	95	102
15	554Hz for 100mS and 440Hz for 400mS	14	10001	French Fire Sound	7	12	88	94
16	Intermittent 660Hz 150mS On/150mS Off	16	10000	Swedish Alarm Tone	6	9	81	87
17	Intermittent 660Hz for 1.8S On/1.8S Off	17	01111	Swedish Alarm Tone	7	12	84	89
18	Intermittent 660Hz for 6.5S On/13S Off	18	01110	Swedish Alarm Tone	8	14	84	89
19	Continuous 660Hz	19	01101	Swedish Alarm Tone	8	14	84	90
20	Alternating 554/440Hz at 1Hz	20	01100	Swedish Alarm Tone	7	13	91	97
21	Intermittent 660Hz at 1Hz	21	01011	Swedish Alarm Tone	6	10	82	88
22	Intermittent 2850Hz 150mS On/100mS Off	14	01010	Pelican Crossing	13	22	102	110
23	Sweep 800-970Hz at 50Hz	14	01001	Low Frequency Buzz BS5839 Part 1 1988	10	18	96	102
24	Sweep 2400-2850Hz at 50Hz	4	01000	High Frequency Buzz	14	25	104	111
25	Intermittent 970Hz 500mS On/500mS Off	25	00111	ISO 8201 Low Frequency BS5839 Pt .1 1988	9	14	93	100
26	Intermittent 2850Hz 500mS On/500mS Off	26	00110	ISO 8201 High Frequency	12	20	102	109
27	Continuous at 4kHz	27	00101		18	35	76	84
28	Alternating tones 800/970 at 2Hz	10	00100	FP1063.1 - telecoms	10	17	94	101

