
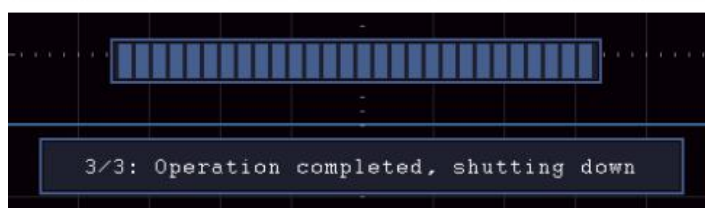
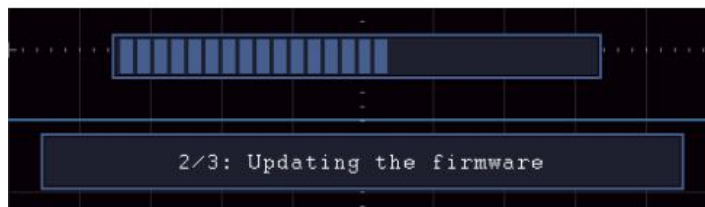



Firmware upgrade steps:

1. The file name of firmware file is fixed as **Scope.update**. Copy this firmware file to the root directory of USB flash disk.
2. Insert the USB flash disk into the USB port on the front panel of the instrument.
3. Push the **Utility** button, select **Function** in the right menu, select **Update** in the left menu.
4. In the right menu, select **Start**, the messages below will be shown.

```
The root directory of the udisk  
must contain Socpe.update.  
Do not power off the instrument.  
The internal data will be cleared.  
Press <start> to execute.  
Press any key to quit.
```

5. In the right menu, select **Start** again, the interfaces below will be displayed in sequence. The update process will take up to three minutes. After completion, the instrument will be shut down automatically.

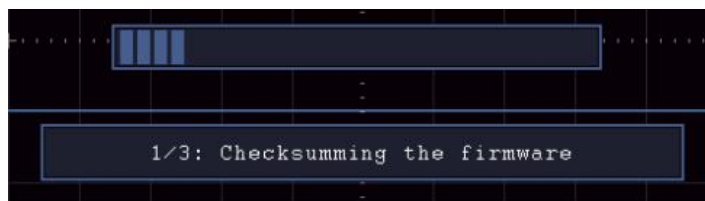

6. Press the  button to power on the instrument.