



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED SOLAR WALL LIGHT

TECHNICAL DATA

MODEL	VT-767-2
SKU	8276, 8277
LUMENS	220 Lm
POWER	1.5W
SOLAR PANEL	0.7Wp, Mono-Crystalline silicon
BATTERY	Li-ion, 1200mAh, 3.7V
CHARGING TIME	6-7 Hours
WORKING TIME	Maximum 24 Hours
WORKING MODE	2 Different Lighting modes
LED TYPE	SMD
DETECTION ANGLE	90°
SENSOR RANGE	2-6 M
COLOR TEMPERATURE	4000K
DIMENSION	144.5x96x79mm
BODY TYPE	ABS+PC
INSTALLATION HEIGHT	2-4 M




02 YEAR
WARRANTY*

IP65
RATING

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.



FR

Cet appareil,
ses accessoires,
cordons et batteries
se recyclent

À DÉPOSER
EN MAGASIN



À DÉPOSER
EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers.
V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should be done by certified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.




This marking indicates that this product should not be disposed of with other household wastes.

INSTALLATION INSTRUCTIONS





1. Hole
2. Expansion Plug
3. Screw
4. Mounting Hole
5. Button

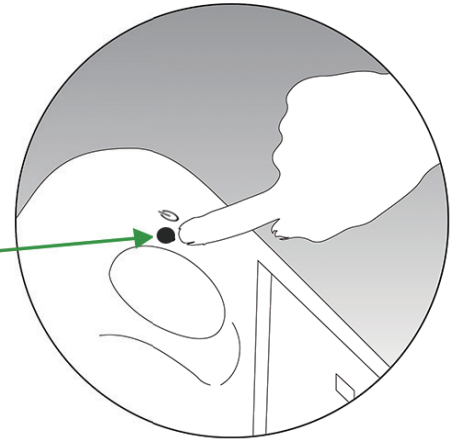


1. Use the card to measure hole position correctly and drill 2 holes.
2. Fix 2 expansion plugs into the holes.
3. Fix a screw to the lower expansion plug with a spare space, insert the notch onto the screw.
4. Straighten the whole lamp and fasten the upper screw.
5. Press the button to adjust to demanded working mode.

WORKING MODES

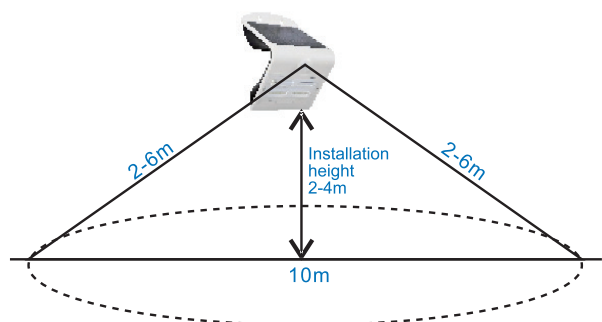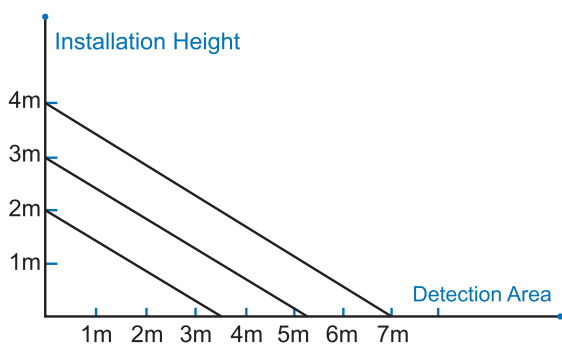

Please press the button to adjust working mode.

- Press 1st time for MODE A
- Press 2nd time for MODE B
- Press 3rd time for OFF

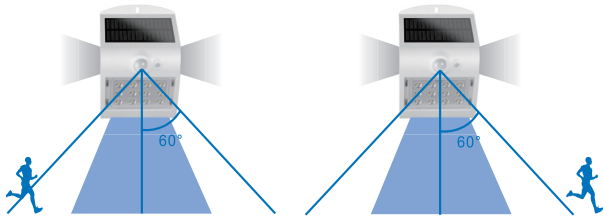

Mode A: Automatically turns on to full brightness (220lm) when motion is detected in the range ≤ 6 mtrs and then turns to weak brightness (front light on & back light on) in 10 seconds of no motion.



Mode B: Automatically turns on to full brightness (220lm) when motion is detected in the range ≤ 6 mtrs and then turns to weak brightness (front light off & back light on) in 10 seconds of no motion.

NOTICE

1. Install this light onto flat surface directionally to get enough solar.
2. The lamp will light up when the environmental brightness is less than 30lux.
3. Inside battery is replaceable, 18650 Li-ion battery, 1200mAh/3.7V.
4. Lamp need to be installed 2-4Mtr from the ground.

MAINTENANCE & WARNING

- Do not use solvents, petrol, etc. Otherwise the light will be damaged.
- Clean the light with a dry, lint-free cloth.
- Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
- Especially during the winter, keep the product free from snow and ice.
- Confirm installation direction is correct (solar panel should be at top)
- Confirm no objects blocking the solar panel to receive sunlight
- Keep away from the fire.
- Don't immerse in the water

RoHS



UK
CA

