


# Moduł łączący piconet do sieci Modbus TCP

## 4 Digital PNP Inputs Filter 3 ms


## 4 Digital Outputs 0.5 A

### SENL-0404D-0003

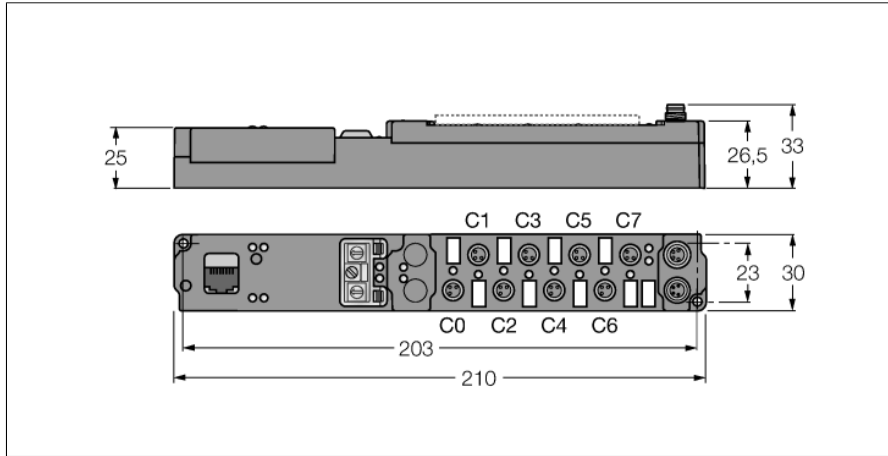


- Configuration interface
- Configurable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Direct connection to the IP link
- Fibre-glass reinforced housing
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


#### Złącze magistrali RJ45




#### Wejście M8 × 1



#### Wyjście M8 × 1



#### Zasilanie M8 × 1



<b>Typ</b>	SENL-0404D-0003
<b>Nr kat.</b>	6824242
<b>Liczba kanałów</b>	8
<b>Napięcie pracy / obciążenia</b>	20...29 VDC
<b>Prąd pracy</b>	≤ 100 mA
<b>Prędkość transmisji ethernetowej</b>	10/100 Mb/s
<b>Tryb adresowania Ethernet:</b>	via coded rotary switches
<b>Interfejs serwisowy</b>	parameterisation via I/O-ASSISTANT
<b>Izolacja elektryczna</b>	Ethernet for operating voltage
<b>Fibre-optic length</b>	≤ 15 m
<b>Liczba kanałów</b>	4 digital inputs acc. to EN 61131-2
<b>Napięcie wejściowe</b>	20...29 VDC via operating voltage
<b>Sygnal napięciowy niskiego poziomu</b>	-3...5 VDC (EN 61131-2, type 2)
<b>Sygnal napięciowy wysokiego poziomu</b>	11...30 VDC (EN 61131-2, type 2)
<b>Opóźnienie wejścia</b>	3 ms
<b>Maks. prąd wejścia</b>	6 mA
<b>Liczba kanałów</b>	4 digital outputs acc. to EN 61131-2
<b>Napięcie wyjścia</b>	Napięcie obciążenia 20...29 V DC
<b>Prąd wyjściowy na kanał</b>	0.5 A, short-circuit proof
<b>Typ obciążenia</b>	resistive, inductive, lamp load
<b>Częstotliwość przełączania</b>	≤ 500 Hz
<b>Współczynnik równoczesności</b>	1
<b>Dimensions (W x L x H)</b>	30 x 210 x 26.5 mm
<b>Test wibracyjny</b>	Zgodnie z normą EN 60068-2-6
<b>Test przeciążeniowy/wstrząsowy</b>	acc. to DIN EN 60068-2-27
<b>Kompatybilność elektromagnetyczna</b>	Zgodnie z normą EN 61000-6-2/EN 61000-6-4
<b>Stopień ochrony</b>	IP67
<b>Certyfikaty</b>	CE, cULus

**Moduł łączący piconet do sieci Modbus TCP**  
**4 Digital PNP Inputs Filter 3 ms**  
**4 Digital Outputs 0.5 A**  
**SENL-0404D-0003**

LEDs

	LINK <sub>green</sub>	ACT <sub>green</sub>	EIP R <sub>green</sub>	EIP E <sub>red</sub>	Function
Ethernet	ON				physical connection present
	OFF				no physical connection present
		flashing			bus traffic present
		OFF			no bus traffic present
EtherNet/IP			ON 0,5 s	OFF	IP address ok
			OFF	OFF	no IP address
			ON	OFF	online
			ON 0,1 s	OFF	offline PLC stop
			OFF	ON 0,5 s	time out
			OFF	ON	IP address conflict

	LED designation	Status <sub>green</sub>	Status <sub>red</sub>	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	0...3	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	4...7	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U <sub>B</sub>	OFF		Operating voltage U <sub>B</sub> < 18 VDC
		ON		Operating voltage U <sub>B</sub> ≥ 18 VDC
	U <sub>L</sub>	OFF		Load voltage U <sub>L</sub> < 18 VDC
		ON		Load voltage U <sub>L</sub> ≥ 18 VDC

Dane z odwzorowania procesu

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Each 4 bit input and 4 bit output data are mapped.	Input	Byte n (M8)	Is used by the physically following bit-oriented extension module connected via the IP Link.			C3P4	C2P4	C1P4	C0P4
		Byte n (M12)				C1P2	C1P4	C0P2	C0P4
	Output	Byte n (M8)				C7P4	C6P4	C5P4	C4P4
		Byte n (M12)				C3P2	C3P4	C2P2	C2P4

C... = Connector no., P... = Pin no.