

Auxiliary current switch can be attached for residual current operated circuit breaker 5SM1 D=55 mm, 2 NO



Figure similar

Versão	
Nome da marca do produto	SETRON
Designação do produto	Interruptor de corrente auxiliar
Execução do produto	incorporável
Tensão de alimentação	
Tensão de serviço	
• valor estipulado	230 V
Detalhes do produto	
Expansão do produto	Contato auxiliar
Número	
Número de comutadores de sinal de erro	0
Número de contactos de abertura	0
Número de contactos de fecho	2
Número de comutadores	0
Projeto mecânico	
Peso líquido	52 g

**Test Certificates**

[Type Test Certificates/Test Report](#)

Outras informações

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/pt/pt/Catalog/product?mlfb=5SW3002>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/pt/ps/5SW3002>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SW3002](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SW3002)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

13 | 23

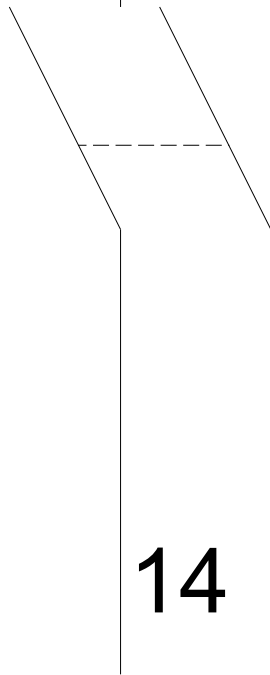

14 | 24