



# Lithium Coin Cell - CR 2032

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

## Technical Data Sheet · CR 2032

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	245785
Nominal Capacity	240 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Continuous Current	3 mA
Max. Pulse Current	15 mA
Operating Temperature	-30°C to +70°C*
Weight	Approx. 2.9 gr.
Chemistry	Li/MnO <sub>2</sub>
UI1642	MH62838

\* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


### DIMENSIONS




### DISCHARGE CHARACTERISTICS

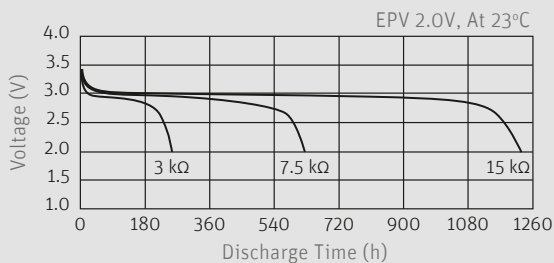


### TEMPERATURE CHARACTERISTICS

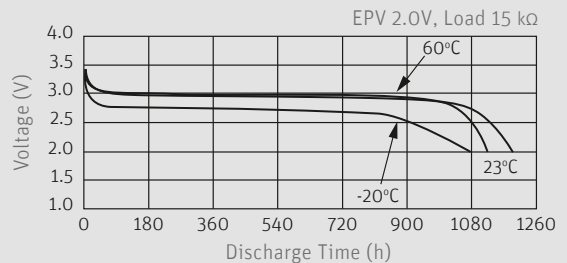

### PULSE DISCHARGE CHARACTERISTICS

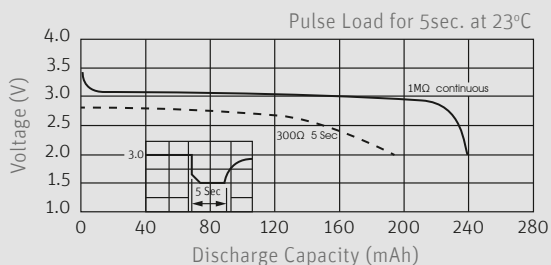

### LOAD VS: CAPACITY

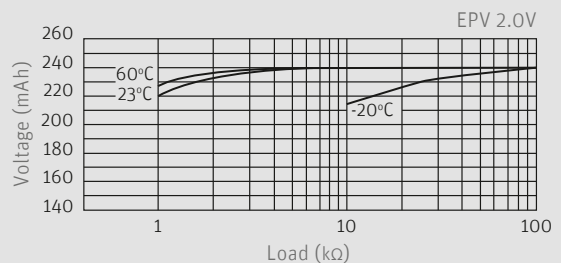

Wide assortment of mounting options, including through hole, surface mount and wire terminals.

Contact Jauch for more information  
[batterytechnology@jauch.com](mailto:batterytechnology@jauch.com)