

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



VARIOFACE front adapters, for Honeywell C300, series C I/O, max. 1 x 16 channels (37-pos. D-SUB connector) can be connected

Product Features

- Pre-assembled system cables are connected directly to I/O modules using the front adapters
- Front adapter with D-SUB connector
- Connection of analog modules

Key commercial data

package_quantity	1
GTIN	4046356518208

Technical data

General

Nominal voltage U_N	< 50 V AC
Nominal voltage U_N	60 V DC
Max. permissible current	1 A (per path)
Connection type, connector	D-SUB pin strip
Number of connectors	1
No. of positions, connector	37
Number of positions	37
Mounting position	Any
Standards/regulations	DIN EN 50178
Standards/regulations	IEC 60664
Standards/regulations	IEC 62103
Pollution degree	2
Surge voltage category	II

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Connection data, power supply

Connection method	Spring-cage conn.
Conductor cross section stranded min.	0.2 mm ²

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622

Technical data

Connection data, power supply

Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Supported controller

Control	HONEYWELL C300
- suitable I/O card	TAIX01 (non-redundant)
- suitable I/O card	TAIX11 (redundant)
- suitable I/O card	TAOX01 (non-redundant)
- suitable I/O card	TAOX11 (redundant)

classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002584


UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622

Circuit diagram

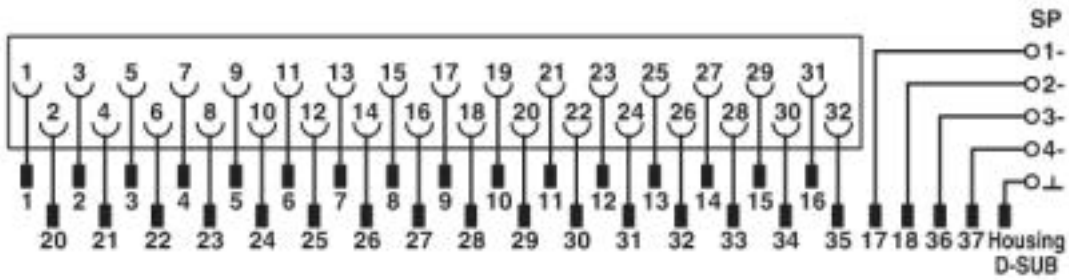

Connection scheme: FLKM-PA-D37/HW/AN/C300

© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>