

4-Channel Analog Input Module 0/4-20 mA

single-ended (S.E.)

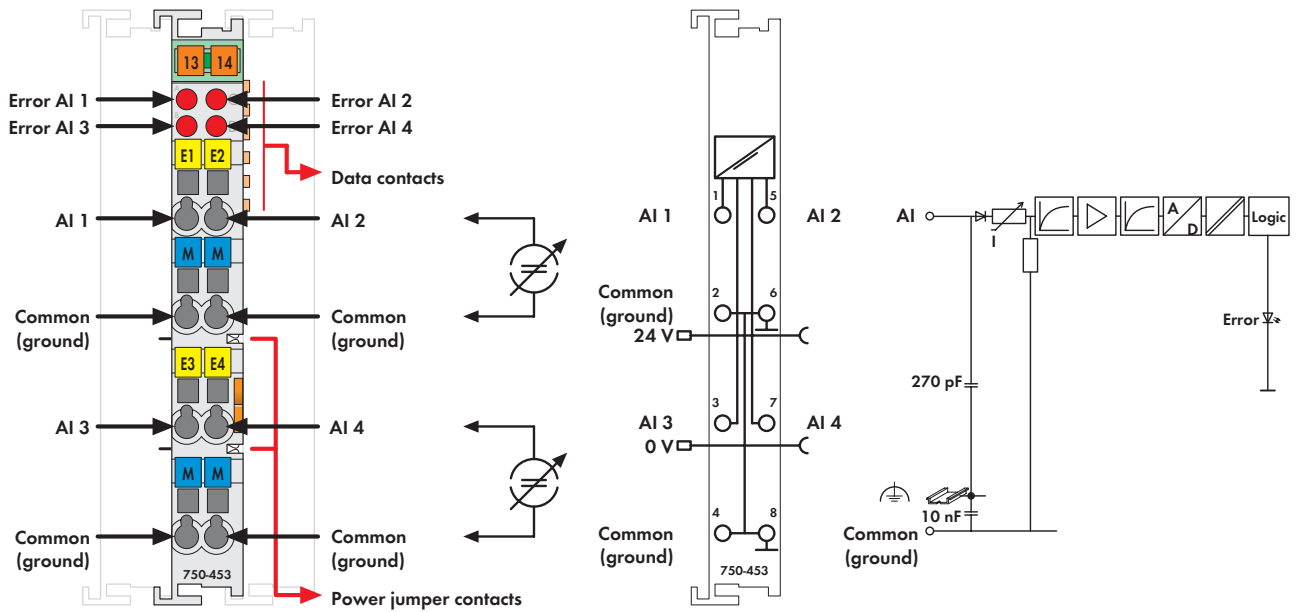


Fig. Series 750 / Technical data see page 30 / Delivery without Mini WSB marker
Series 750 / 753 marking see pages 20 ... 21 / 22 ... 23

The analog input module receives signals with standardized values of 0-20 mA and 4-20 mA.

The input signal is electrically isolated and will be transmitted with a resolution of 12 bits.

The internal system supply is used for the power supply of the module.

The input channels of the module have one common ground potential.

Description	Item no.	Pack. unit
4AI 0-20mA S.E.	750-453	10 ¹⁾
4AI 4-20mA S.E.	750-455	10 ¹⁾
4AI 4-20mA S.E./T	750-455/025-000	1
(Operating temperature -20 °C ... +60 °C)		
4AI 0-20mA S.E. (without connector)	753-453	10 ¹⁾
4AI 4-20mA S.E. (without connector)	753-455	10 ¹⁾
¹⁾ Also available individually		
Accessories	Item no.	Pack. unit
Connectors Series 753	753-110	25
Coding elements	753-150	100
Miniature WSB Quick marking system		
plain	248-501	5
with marking	see pages 214 ... 215	
Approvals		
Series 750 and 753	UL 508	
Conformity marking	CE	
Series 750		
Marine applications	see pages 24 ... 27	
EN 50021	II 3 G EEx nA II T4	
UL 1604	Class I Div2 ABCD T4A	

Technical Data	
No. of inputs	4
Voltage supply	via system voltage DC / DC
Current consumption (internal)	65 mA
Input voltage max.	32 V
Signal current	0 mA ... 20 mA (750-453, 753-453) 4 mA ... 20 mA (750-455, 753-455)
Input resistance	< 100 Ω / 20 mA
Resolution	12 bits
Conversion time typ.	10 ms
Measuring error (25 °C)	< ± 0.2 % of the full scale value
Temperature coefficient	< ± 0.01 % / K of the full scale value
Isolation	500 V system / supply
Bit width	4 x 16 bits data 4 x 8 bits control / status (optional)
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped length series 750 / 753	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	approx. 55 g
EMC CE-Immunity to interference	acc. to EN 50082-2 (1996)
EMC CE-Emission of interference	acc. to EN 50081-1 (1993)
EMC marine applications -	
Immunity to interference	acc. to Germanischer Lloyd (2001)
EMC marine applications -	
Emission of interference	acc. to Germanischer Lloyd (2001)