# FIBOX MNX PC 125/50 LG

Sample photo

**Order symbol:** PC 125/50 LG
**Product nbr:** 6012308

**Description:** Enclosure, PC
**Remarks:** Grey cover

**EAN:** 6418074014009
**El. number:**
Finland 3420324
Denmark 8212022263
Italy 7351043

**Including:** Base with TPE gasket and screws for mounting plate/DIN-rail, cover with polyamide cover screws and wing heads for cover screws.

| Dimensions: | L | W | H |
|---|---|---|---|
| mm: | 130 | 130 | 50 |
| inch: | 5.1 | 5.1 | 2 |

## Materials:

**Material:** PC
**Base colour:** RAL 7035
**Cover colour:** RAL 7035
**Cover screws material:** Polyamide
**Cover screws colour:** Grey
**Gasket material:** TPE

## Temperatures:

**Short term:** -40 … 120 °C
**Continuous:** -40 … 80 °C
**Short term:** -40 … 250 °F
**Continuous:** -40 … 175 °F

## Accessories:

| | |
|---|---|
| MIV 125 | Mounting plate |
| MIN 10 | DIN-15 Mounting rail |
| MIV 10 | DIN-35 Mounting rail |
| FP A 125/130 | Front plate |
| HFP 130 | Front plate hinge series |

## Rating:

**Ingress Protection (EN 60529):** IP 66/67
**Impact Resistance (EN 50102):** IK 08
**Electrical insulation:** Totally insulated
**Halogen free (DIN/VDE 0472, Part 815):** Yes
**UV resistance:** UL 508
**Flammability Rating (UL 746 C 5):** UL 94 5V
**Glow Wire Test (IEC 695-2-1) °C:** 960
**NEMA Class:** NEMA 1, 4, 4X, 6

## Certificates:

**Germanischer Lloyd (GL)**
**Underwriters Laboratories**
**Det Norske Veritas**
**Fimko**
**Europe EN 50298 1998**
**UL Canada**
**Gost R**

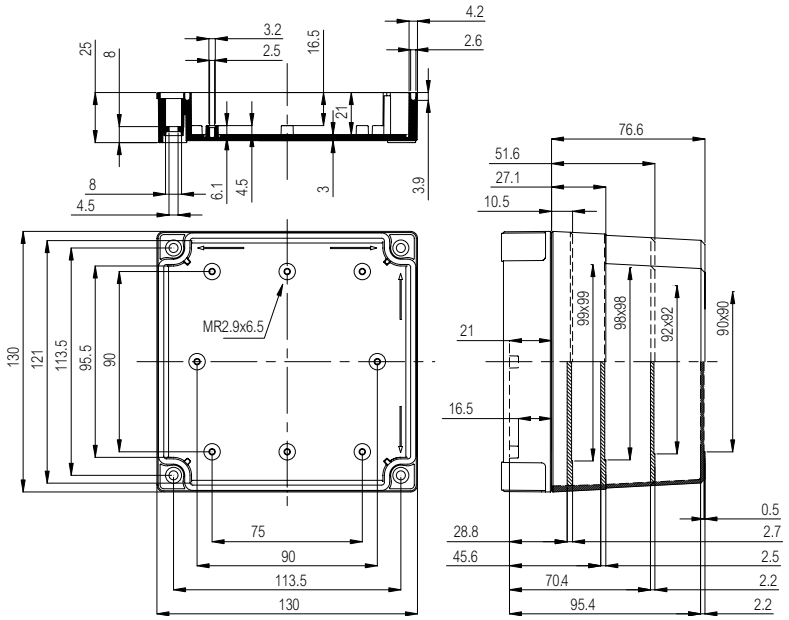


(c) Fibox OY, Data subject to change without notice