Feed-through terminal block - ST 2,5-3L BU - 3038710

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



Feed-through terminal block, Connection method: Spring-cage connection, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Color: blue, Mounting type: NS 35/7,5, NS 35/15

Product Features

- Can be labeled on every level

Key commercial data

package_quantity	50
GTIN	4017918892739

Technical data

General

Number of levels	3
Number of connections	6
Color	blue
Insulating material	PA
Inflammability class according to UL 94	V0

General

Maximum load current	28 A (with 4 mm² conductor cross section)
Rated surge voltage	6 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I_N	20 A
Nominal voltage U_N	500 V
Open side panel	ja

Dimensions

Width	5.2 mm
Length	99.5 mm
Height NS 35/7,5	58 mm
Height NS 35/15	65.5 mm

Connection data

Feed-through terminal block - ST 2,5-3L BU - 3038710

Technical data

Connection data

Conductor cross section solid min.	0.08 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section AWG/kcmil min.	28
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded min.	0.08 mm²
Conductor cross section stranded max.	2.5 mm²
Min. AWG conductor cross section, stranded	28
Max. AWG conductor cross section, stranded	14
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.14 mm²
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.14 mm²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm²
Connection method	Spring-cage connection
Minimum stripping length	8 mm
Maximum stripping length	10 mm
Internal cylindrical gage	A3

classifications

eCl@ss

eCl@ss 4.0	27141128
eCl@ss 4.1	27141128
eCl@ss 5.0	27141128
eCl@ss 5.1	27141128
eCl@ss 6.0	27141128
eCl@ss 7.0	27141128
eCl@ss 8.0	27141128

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410

Feed-through terminal block - ST 2,5-3L BU - 3038710

classifications

UNSPSC

UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / VDE Gutachten mit Fertigungsüberwachung / cULus Recognized /

Approval details

CSA

Usegroups	B	C
Nominal voltage UN	300 V	300 V
Nominal current IN	20 A	20 A
mm²/AWG/kcmil	28-12	28-12

UL Recognized

Usegroups	B	C	D
Nominal voltage UN	300 V	300 V	600 V
Nominal current IN	20 A	20 A	5 A
mm²/AWG/kcmil	28-12	28-12	28-12

cUL Recognized

Usegroups	B	C	D
Nominal voltage UN	300 V	300 V	600 V
Nominal current IN	20 A	20 A	5 A
mm²/AWG/kcmil	28-12	28-12	28-12

GOST

Feed-through terminal block - ST 2,5-3L BU - 3038710

approvals

VDE Gutachten mit Fertigungsüberwachung

Nominal voltage UN	500 V
Nominal current IN	24 A
mm²/AWG/kcmil	0.2-2.5

cULus Recognized

accessories

End cover

D-ST 2,5-3L - 3036660



DP PS-5 - 3036725



Marker carriers

STP 5-3 - 0810562



Labeled terminal marker

Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

WST 2,5 - 3030941



ZBF 5 CUS - 0825025



UC-TMF 5 CUS - 0824638



UCT-TMF 5 CUS - 0829658



Screwdriver tools

SZF 1-0,6X3,5 - 1204517



Documentation

Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

ST-IL - 3039900



Bridge

FBS 2-5 - 3030161



FBS 3-5 - 3030174



FBS 4-5 - 3030187



FBS 5-5 - 3030190



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

FBS 10-5 - 3030213



FBS 20-5 - 3030226



FBS 50-5 - 3038930



Mounting rail

NS 35/ 7,5 PERF 2000MM - 0801733



NS 35/ 7,5 UNPERF 2000MM - 0801681



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

NS 35/ 7,5 WH PERF 2000MM - 1204119



NS 35/ 7,5 WH UNPERF 2000MM - 1204122



NS 35/ 7,5 AL UNPERF 2000MM - 0801704



NS 35/ 7,5 ZN PERF 2000MM - 1206421



NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



NS 35/ 7,5 CU UNPERF 2000MM - 0801762



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

NS 35/ 7,5 CAP - 1206560



Terminal marking

ZBF 5:UNBEDRUCKT - 0808642



UC-TMF 5 - 0818153



UCT-TMF 5 - 0828744



Insulating sleeve

ISH 2,5/0,2 - 3002843



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

ISH 2,5/0,5 - 3002856



ISH 2,5/1,0 - 3002869



Test plug terminal block

PAI-4-FIX-5/6 BU - 3035975



PAI-4-FIX-5/6 OG - 3035974



PAI-4-FIX-5/6 YE - 3035977



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

PAI-4-FIX-5/6 RD - 3035976



PAI-4-FIX-5/6 GN - 3035978



PAI-4-FIX-5/6 BK - 3035980



PAI-4-FIX-5/6 GY - 3035982



PAI-4-FIX-5/6 VT - 3035979



PAI-4-FIX-5/6 BN - 3035981



Feed-through terminal block - ST 2,5-3L BU - 3038710

accessories

PS-5 - 3030983




PS-5/2,3MM RD - 3038723



Drawings

Circuit diagram

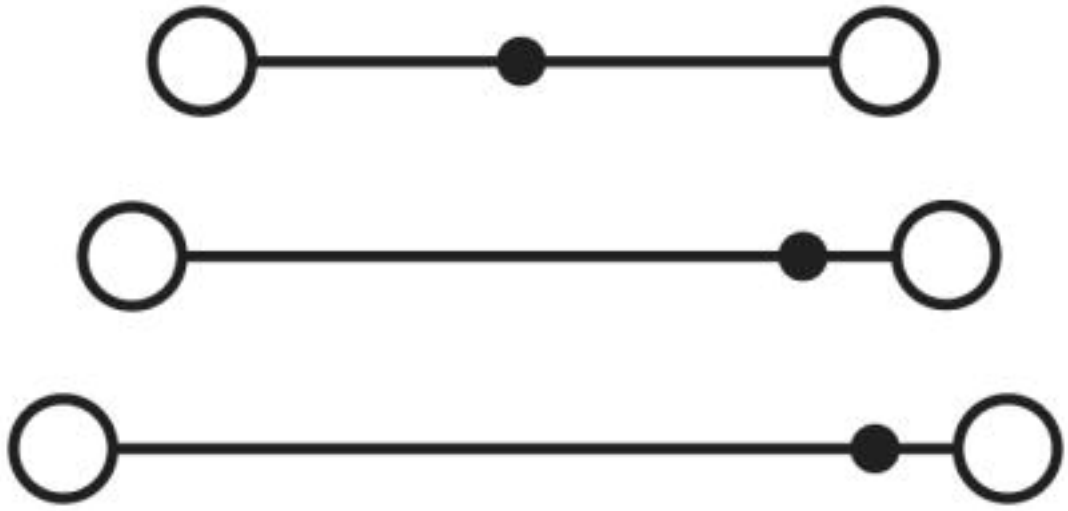

© Phoenix Contact 2013 - all rights reserved
http://www.phoenixcontact.com