

Feed-through terminal block - OTTA 2,5-P/P - 0790543

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Universal terminal block with bolt connection, with test socket screws, cross section: 0.1 - 2.5 mm², width: 9 mm, color: Gray

The illustration shows version
OTTA 2,5

Key commercial data

package_quantity	50
GTIN	4017918005658

Technical data

General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA
Inflammability class according to UL 94	V2

General

Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I _N	24 A
Nominal voltage U _N	800 V (the nominal voltage applies to insulated cable lugs)
Open side panel	ja

Dimensions

Length	43.5 mm
Width	9 mm
Height NS 35/7,5	45.5 mm
Height NS 35/15	53 mm
Height NS 32	50.5 mm

Connection data

Conductor cross section solid min.	0.1 mm ²
------------------------------------	---------------------

Feed-through terminal block - OTTA 2,5-P/P - 0790543

Technical data

Connection data

Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.1 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm
Connection method	Bolt connection
Connection in acc. with standard	DIN 46 234
Min. cross section	0.1 mm ²
Max. cross section	2.5 mm ²
Hole diameter	3.2 mm
Bolt diameter	3 mm
Connection in acc. with standard	DIN 46237
Min. cross section	0.5 mm ²
Max. cross section	2.5 mm ²
Hole diameter	3.2 mm
Bolt diameter	3 mm

classifications

eCl@ss

eCl@ss 4.0	27141120
eCl@ss 4.1	27141120
eCl@ss 5.0	27141120
eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Feed-through terminal block - OTTA 2,5-P/P - 0790543

approvals

CSA / UL Recognized / GOST / GOST /

Approval details

CSA 	
Nominal voltage UN	600 V
Nominal current IN	20 A
mm ² /AWG/kcmil	22-14

UL Recognized 		
Usegroups	B	C
Nominal voltage UN	600 V	600 V
Nominal current IN	20 A	20 A
mm ² /AWG/kcmil		

GOST 
--



accessories

End cover

D-OTTA 2,5 - 0790569



Partition plate

Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

ATP-OTTA 2,5 - 0790572



Screwdriver tools

SZS 0,6X3,5 - 1205053



Bridge

EB 2-OTTA 2,5 - 3026065



EB 3-OTTA 2,5 - 3026078



EB 4-OTTA 2,5 - 3026081



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

EB 5-OTTA 2,5 - 3026094



EB 6-OTTA 2,5 - 3026104



EB 7-OTTA 2,5 - 3026117



EB 10-OTTA 2,5 - 3026120



Mounting rail

NS 32 PERF 2000MM - 1201002



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

NS 32 UNPERF 2000MM - 1201015



NS 35/ 7,5 PERF 2000MM - 0801733



NS 35/ 7,5 UNPERF 2000MM - 0801681



NS 35/ 7,5 WH PERF 2000MM - 1204119



NS 35/ 7,5 WH UNPERF 2000MM - 1204122



NS 35/ 7,5 AL UNPERF 2000MM - 0801704



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

NS 35/ 7,5 ZN PERF 2000MM - 1206421



NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



NS 35/ 7,5 CU UNPERF 2000MM - 0801762



NS 35/ 7,5 CAP - 1206560



NS 35/15 PERF 2000MM - 1201730



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

NS 35/15 UNPERF 2000MM - 1201714



NS 35/15 WH PERF 2000MM - 0806602



NS 35/15 WH UNPERF 2000MM - 1204135



NS 35/15 AL UNPERF 2000MM - 1201756



NS 35/15 ZN PERF 2000MM - 1206599



NS 35/15 ZN UNPERF 2000MM - 1206586



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

NS 35/15 CU UNPERF 2000MM - 1201895



NS 35/15 CAP - 1206573



NS 35/15-2,3 UNPERF 2000MM - 1201798



Terminal marking

ZB 8:UNBEDRUCKT - 1052002



UC-TM 8 - 0818072



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

UCT-TM 8 - 0828740



Labeled terminal marker

ZB 8 CUS - 0825011



UC-TM 8 CUS - 0824597



UCT-TM 8 CUS - 0829616



End block

CLIPFIX 35 - 3022218



Feed-through terminal block - OTTA 2,5-P/P - 0790543

accessories

CLIPFIX 35-5 - 3022276



E/NS 35 N - 0800886



E/UK - 1201442



E/UK 1 - 1201413




Drawings

Circuit diagram



Feed-through terminal block - OTTA 2,5-P/P - 0790543

Circuit diagram

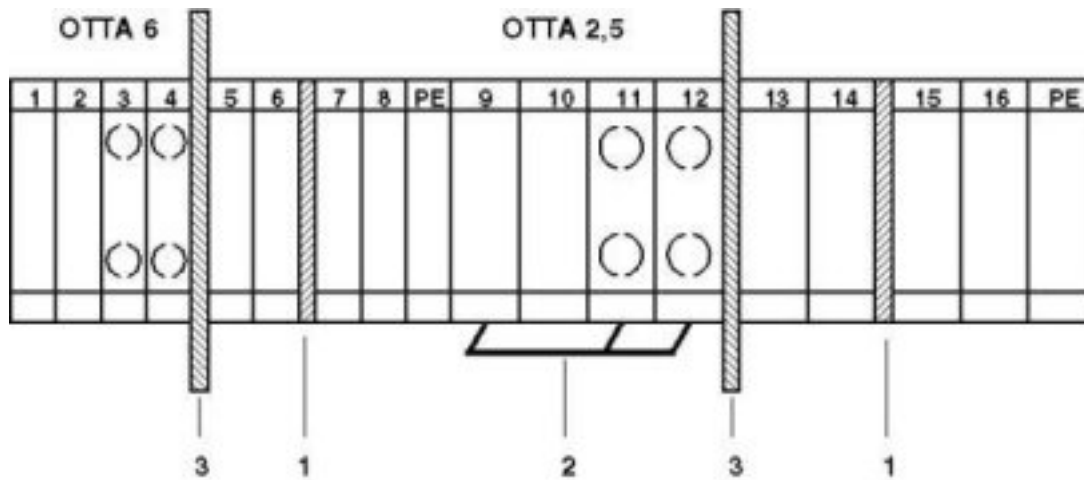

1 = cover
2 = insertion bridge
3 = partition plate

© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>