


- Very compact metal cased power supplies
- High operating temperature up to 70°C
- Low no load power consumption <0.5W
- Screw terminal block
- No internal fan
- Universal AC input, full range
- Withstand 300 VAC surge input for 5 s
- Adjustable output voltage
- 3-year product warranty

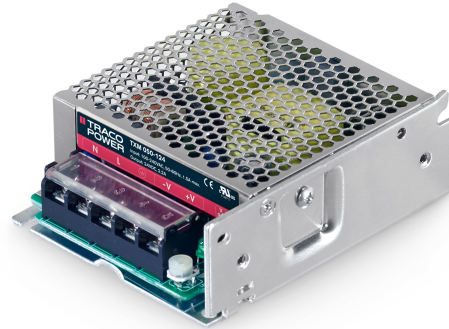

The TXM 050 series of 50 Watt is a family of enclosed AC/DC power supplies designed for cost critical applications. With a low profile metal case and screw terminal block connections, they are easy to install in any equipment. There are five models of single output voltages from 5 VDC to 48 VDC. These power supplies have universal input and comply with European EMC standards and the Low Voltage Directive (LVD).

Models				
Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TXM 050-105	40 W	5 VDC (4.8 - 5.5 VDC)	8'000 mA	80 %
TXM 050-112	50 W	12 VDC (11.4 - 13.2 VDC)	4'200 mA	85 %
TXM 050-115	51 W	15 VDC (14.3 - 15.0 VDC)	3'400 mA	86 %
TXM 050-124	53 W	24 VDC (22.8 - 26.4 VDC)	2'200 mA	87 %
TXM 050-148	54 W	48 VDC (45.6 - 52.8 VDC)	1'100 mA	89 %

### Input Specifications

Input Voltage	- AC Range	Operational Range: <b>85 - 264 VAC</b> (Full Range) Rated Range: <b>100 - 240 VAC</b> (Full Range)
	- DC Range	Operational Range: <b>120 - 375 VDC</b> (Designed for, no certification) Polarity: <b>irrelevant</b> (Surge voltage (5 s max.): 300 VAC max.)
Input Frequency		Operational Range: <b>47 - 63 Hz</b> Certified: <b>50/60 Hz</b>
Input Current	- Full Load & Vin = 115 VAC	<b>1'300 mA max.</b>
Power Consumption	- No load & Vin = 230 VAC	<b>500 mW max.</b>
	- No load & Vin = 115 VAC	<b>500 mW max.</b>
Input Inrush Current	- At 230 VAC	<b>45 A max.</b>
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)

### Output Specifications

Output Voltage Adjustment		<b>-5% to +10%</b> (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy		<b>±3% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	<b>0.5% max.</b>
	- Load Variation (0 - 100%)	<b>1% max.</b>
Ripple and Noise (20 MHz Bandwidth)	5 VDC model:	<b>80 mVp-p max.</b> (w/ 0.1 µF    10 µF)
	12 VDC model:	<b>120 mVp-p max.</b> (w/ 0.1 µF    10 µF)
	15 VDC model:	<b>120 mVp-p max.</b> (w/ 0.1 µF    10 µF)
	24 VDC model:	<b>200 mVp-p max.</b> (w/ 0.1 µF    10 µF)
	48 VDC model:	<b>200 mVp-p max.</b> (w/ 0.1 µF    10 µF)
Minimum Load		Not required
Temperature Coefficient		<b>±0.03 %/K max.</b>
Hold-up Time	- At 230 VAC	<b>50 ms min.</b>
Start-up Time	- At 230 VAC	<b>1'500 ms max.</b>
Start-up Overshoot Voltage		<b>5% max.</b>
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		<b>105 - 150% of Iout max.</b>
Oversvoltage Protection		<b>115 - 150% of Vout nom.</b>
Transient Response	- Response Deviation	<b>9% max.</b> (75% to 100% Load Step)
	- Response Time	<b>400 µs typ.</b> (75% to 100% Load Step)

### Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/txm050">www.tracopower.com/overview/txm050</a>
Protection Class		<b>Class I</b> (Prepared): Connection to PE
Pollution Degree		<b>PD 2</b>
Over Voltage Category		<b>OVC II</b>

### EMC Specifications

EMI Emissions	- Conducted Emissions	<b>EN 55032 class B</b> (internal filter)
	- Radiated Emissions	<b>EN 55032 class B</b> (internal filter)
	- Harmonic Current Emissions	<b>EN 61000-3-2, class A</b>
	- Voltage Fluctuations & Flicker	<b>EN 61000-3-3</b>

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


EMS Immunity	<ul style="list-style-type: none"> <li>- Electrostatic Discharge</li> <li>- RF Electromagnetic Field</li> <li>- EFT (Burst) / Surge</li> <li>- Conducted RF Disturbances</li> <li>- PF Magnetic Field</li> <li>- Voltage Dips &amp; Interruptions</li> </ul>	EN 55024 (IT Equipment) EN 55035 (Multimedia) Air: EN 61000-4-2, ±8 kV, perf. criteria B Contact: EN 61000-4-2, ±4 kV, perf. criteria B EN 61000-4-3, 3 V/m, perf. criteria A EN 61000-4-4, ±1 kV, perf. criteria B L to L: EN 61000-4-5, ±1 kV, perf. criteria B L to PE: EN 61000-4-5, ±2 kV, perf. criteria B EN 61000-4-6, 3 Vrms, perf. criteria A Continuous: EN 61000-4-8, 1 A/m, perf. criteria A 230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria C >95%, 0.5 periods, perf. criteria B >95%, 250 periods, perf. criteria C
--------------	--	---

<b>General Specifications</b>		
Relative Humidity		90% max. (non condensing)
Temperature Ranges	<ul style="list-style-type: none"> <li>- Operating Temperature</li> <li>- Storage Temperature</li> </ul>	-25°C to +70°C -40°C to +85°C
Power Derating	<ul style="list-style-type: none"> <li>- High Temperature</li> <li>- Low Input Voltage</li> </ul>	1.5 %/K above 50°C (5 Vout model) 1 %/K above 50°C (other models) 0.74 %/V below 115 VAC See application note: <a href="http://www.tracopower.com/overview/txm050">www.tracopower.com/overview/txm050</a>
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		65 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		275 VAC
Isolation Test Voltage	<ul style="list-style-type: none"> <li>- Input to Output, 60 s</li> <li>- Input to Case or PE, 60 s</li> <li>- Output to Case or PE, 60 s</li> </ul>	3'000 VDC 1'500 VAC 500 VAC
Creepage	- Input to Output	6.1 mm min.
Clearance	- Input to Output	6.1 mm min.
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Leakage Current	<ul style="list-style-type: none"> <li>- Earth Leakage Current</li> <li>- Touch Current</li> </ul>	3500 µA max. 250 µA max.
Reliability	- Calculated MTBF	200'000 h (MIL-HDBK-21 7F, ground benign)
Housing Material		Aluminum
Housing Type		Metal Case
Mounting Type		Chassis Mount
Connection Type		Screw Terminal
Weight		270 g
Environmental Compliance	<ul style="list-style-type: none"> <li>- REACH Declaration</li> <li>- RoHS Declaration</li> <li>- SCIP Reference Number</li> </ul>	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) 9ca2f776-0a1e-4139-86c0-d553473746ef

<b>Supporting Documents</b>	
Overview Link (for additional Documents)	<a href="http://www.tracopower.com/overview/txm050">www.tracopower.com/overview/txm050</a>

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

### Outline Dimensions

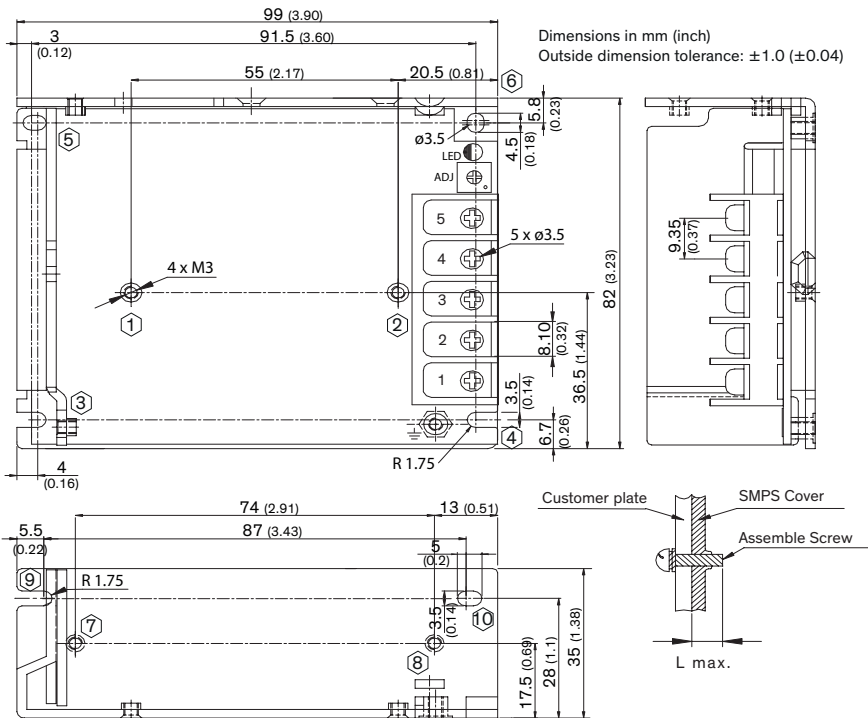

### Pin-Out

Pin	Function
1	AC (N)
2	AC (L)
3	PE
4	- Vout
5	+ Vout

Screw locked torque:  
8.0 kgfcm (0.78 Nm) max.

Screw Definition				
Installation Method	Position No.	Screw Size	L max.	Torque max.
Bottom Installation	1-2	M3	4 (1.6)	6.5 kgfcm
	3-6	M3	4 (1.6)	6.5 kgfcm
Side Installation	7-8	M3	4 (1.6)	6.5 kgfcm
	9-10	M3	4 (1.6)	6.5 kgfcm