

## Red Line Lasermodule

LC650-5-24-F(14x55)

Order Number: 70112580

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		5		mW
Operating Voltage	21.6	24	26.4	V DC
Operating Current	3	7	20	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

### Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	0.4mrad
Fan Angle	90°
Line Thickness	adjustable
Operating Distance	3m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

### Technical Parameters

Lifetime	>5000h
RoHS	yes

### Electrical Parameters

Potential of Housing	isolated
----------------------	----------

### Mechanical Parameters

Size	Ø14x55mm
Material	aluminium
Cable length	100mm
Wire type	Belden, Typ 1007, 26AWG
Output Aperture	3.5mm
Housing Color	black
Weight	18g
Stripping of wire	5mm

(\*) Over the complete operating temperature range

### Features





- Laser Class 1
- Image processing
- Adjustable focus
- Compact size
- Operating Voltage 24V DC


### Picture




### Cable Colors

Ground		black	GND
Positive		red	21.6 - 26.4, typ 24V DC

### Drawing

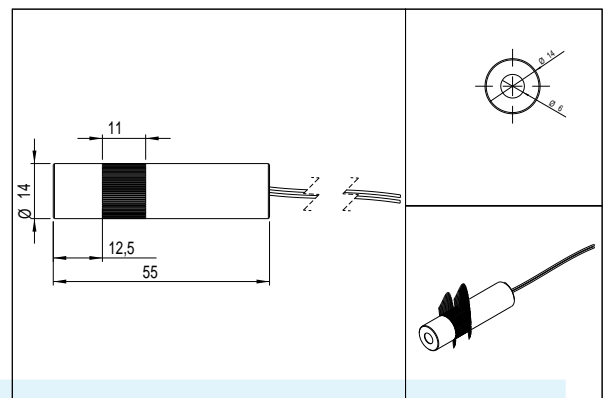

### Safety Label



### Revision

REV 21 | 22-SEP-2014