

Red Dot Lasermodule

DD635-1-3(12x34)

Order Number: 70100488

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		1		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	15	25	40	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Optical Parameters

Beam Shape	Dot
Laser Class	2
Divergence	0.5mrad
Size of Laserdot	adjustable
Operating Distance	10m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

Technical Parameters

Lifetime	>5000h
RoHS	yes

Electrical Parameters

Potential of Housing	isolated
Power Supply	LFNT-3

Mechanical Parameters

Size	Ø12x34mm
Material	Brass
Cable length	100mm
Wire type	Belden, Typ 1007, 26AWG
Output Aperture	5mm
Housing Color	black
Weight	17g
Stripping of wire	5mm


(*) Over the complete operating temperature range

Features




- Operating Voltage 3V DC
- Laser Class 2
- Adjustable focus
- Glas lenses anti reflex coated
- Image processing


Picture

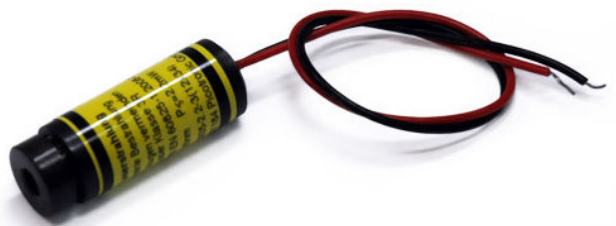


Cable Colors

Ground		black	GND
Positive		red	2.7 - 3.3, typ 3V DC

Drawing

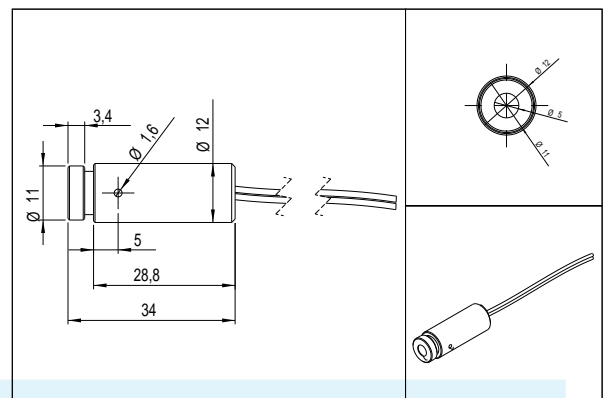

Safety Label



Revision

REV 7 | 13-OCT-2014