



CONTACTOR,AC3:18.5KW/400V, 1NO+1NC, 230V AC 50HZ, 3-POLE, SIZE S2, SCREW TERMINAL

Figure similar

product brand name	SIRIUS
Product designation	3RT2 contactor
General technical data:	
Product expansion function module for communication	No
Insulation voltage	
• Rated value	690 V
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	400 V
Degree of pollution	3
Shock resistance	
• at rectangular impulse	
— with AC	11.8g / 5 ms, 7.4g / 10 ms
• with sine pulse	
— with AC	18.5g / 5 ms, 11.6g / 10 ms
Surge voltage resistance Rated value	6 kV
Mechanical service life (switching cycles)	
• of the contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Thermal short-time current restricted to 10 s	400 A
Protection class IP	
• on the front	IP00

<ul style="list-style-type: none"> • of the terminal 	IP00
Equipment marking	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 	Q
<ul style="list-style-type: none"> • acc. to DIN EN 81346-2 	Q
Main circuit:	
Number of poles for main current circuit	3
Number of NC contacts for main contacts	0
Number of NO contacts for main contacts	3
Operating voltage	
<ul style="list-style-type: none"> • at AC-3 Rated value maximum 	690 V
Operating current	
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — at 400 V at ambient temperature 40 °C Rated value — up to 690 V at ambient temperature 40 °C Rated value — up to 690 V at ambient temperature 60 °C Rated value • at AC-2 at 400 V Rated value • at AC-3 <ul style="list-style-type: none"> — at 400 V Rated value — at 500 V Rated value — at 690 V Rated value • at AC-4 at 400 V Rated value 	60 A 60 A 55 A 40 A 40 A 40 A 24 A 35 A
Operating current with 1 current path	
<ul style="list-style-type: none"> • at DC-1 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value — at 220 V Rated value — at 440 V Rated value — at 600 V Rated value • at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value — at 220 V Rated value — at 440 V Rated value — at 600 V Rated value 	55 A 4.5 A 1 A 0.4 A 0.25 A 35 A 2.5 A 1 A 0.1 A 0.06 A
Operating current with 2 current paths in series	
<ul style="list-style-type: none"> • at DC-1 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value — at 220 V Rated value 	55 A 45 A 5 A

— at 440 V Rated value	1 A
— at 600 V Rated value	0.8 A
• at DC-3 at DC-5	
— at 110 V Rated value	25 A
— at 220 V Rated value	5 A
— at 24 V Rated value	55 A
— at 440 V Rated value	0.27 A
— at 600 V Rated value	0.16 A
Operating current with 3 current paths in series	
• at DC-1	
— at 24 V Rated value	55 A
— at 110 V Rated value	55 A
— at 220 V Rated value	45 A
— at 440 V Rated value	2.9 A
— at 600 V Rated value	1.4 A
• at DC-3 at DC-5	
— at 110 V Rated value	55 A
— at 220 V Rated value	25 A
— at 24 V Rated value	55 A
— at 440 V Rated value	0.6 A
— at 600 V Rated value	0.6 A
Operating power	
• at AC-1	
— at 230 V at 60 °C Rated value	21 kW
— at 400 V at 60 °C Rated value	36 kW
— at 690 V at 60 °C Rated value	62 kW
Operating power for ≥ 200000 operating cycles at AC-4	
• at 400 V Rated value	11.6 kW
• at 690 V Rated value	16.8 kW
Active power loss at AC-3 at 400 V for rated value of the operating current per conductor	
	2.2 W
Operating frequency	
• at AC-1 maximum	1 200 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	1 000 1/h
• at AC-4 maximum	300 1/h
No-load switching frequency	
• with AC	5 000 1/h
Control circuit/ Control:	
Type of voltage of the control supply voltage	AC

Control supply voltage with AC • at 50 Hz Rated value	230 V
Operating range factor control supply voltage rated value of the magnet coil with AC • at 50 Hz	0.8 ... 1.1
Apparent pick-up power of the magnet coil with AC • at 50 Hz	190 V·A
Apparent holding power of the magnet coil with AC • at 50 Hz	16 V·A
Closing delay • with AC	10 ... 80 ms
Opening delay • with AC	10 ... 18 ms
Arcing time	10 ... 20 ms
Auxiliary circuit:	
Number of NC contacts • for auxiliary contacts — instantaneous contact	1
Number of NO contacts • for auxiliary contacts — instantaneous contact	1
Product expansion Auxiliary switch	Yes
Operating current at AC-12 maximum	10 A
Operating current at AC-15 • at 230 V Rated value • at 400 V Rated value • at 690 V Rated value	10 A 3 A 1 A
Operating current at DC-12 • at 60 V Rated value • at 110 V Rated value • at 125 V Rated value • at 220 V Rated value • at 600 V Rated value	6 A 3 A 2 A 1 A 0.15 A
Operating current at DC-13 • at 24 V Rated value • at 60 V Rated value • at 110 V Rated value • at 125 V Rated value • at 220 V Rated value • at 600 V Rated value	10 A 2 A 1 A 0.9 A 0.3 A 0.1 A
Contact reliability of the auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings:

Full-load current (FLA) for three-phase AC motor	
<ul style="list-style-type: none"> • at 480 V Rated value • at 600 V Rated value 	<p>40 A</p> <p>41 A</p>
yielded mechanical performance [hp]	
<ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V Rated value — at 230 V Rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V Rated value — at 220/230 V Rated value — at 460/480 V Rated value — at 575/600 V Rated value 	<p>3 hp</p> <p>7.5 hp</p> <p>10 hp</p> <p>15 hp</p> <p>30 hp</p> <p>40 hp</p>
Contact rating of the auxiliary contacts acc. to UL	A600 / P600

Short-circuit:

Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of assignment 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required 	<p>gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A</p> <p>gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 80 A</p> <p>fuse gL/gG: 10 A</p>

Installation/ mounting/ dimensions:

mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<ul style="list-style-type: none"> • Side-by-side mounting 	Yes
Height	113.4 mm
Width	55 mm
Depth	130 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — Backwards — upwards 	<p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>50 mm</p>

— at the side	6 mm
— downwards	50 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	6 mm

Connections/ Terminals:

Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-section	
• for main contacts	
— single or multi-stranded	2x (1 ... 35 mm ²), 1x (1 ... 50 mm ²)
— finely stranded with core end processing	2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²)
• for AWG conductors for main contacts	2x (18 ... 2), 1x (18 ... 1)
• for auxiliary contacts	
— single or multi-stranded	2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)
• for AWG conductors for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)

Safety related data:

Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	73 %
Product function	
• Mirror contact acc. to IEC 60947-4-1	Yes
• positively driven operation acc. to IEC 60947-5-1	No
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529

Mechanical data:

Size of contactor	S2
--------------------------	----

Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Certificates/ approvals:

[Confirmation](#)[Environmental
Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RT20351AP00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT20351AP00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RT20351AP00&lang=en

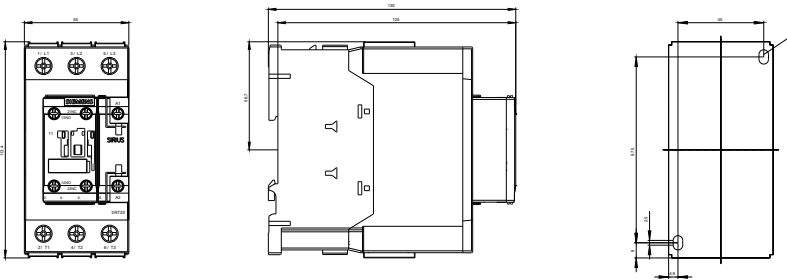

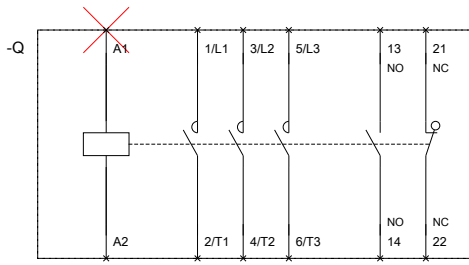

last modified:

14.05.2015