

AT89STK-06 CAN Starter Kit

Software Demonstration Guide





Section 1	
Introduction	1-1
1.1 Abbreviations	1-1

Section 2	
Getting Started.....	2-3
2.1 Hardware Requirements	2-3
2.2 Software Requirements.....	2-3
2.3 FLIP Software	2-3

Section 3	
Software Demonstrations	3-5
3.1 UART Bootloader Demonstration Setup	3-5
3.2 Using FLIP	3-6
3.3 CAN Bootloader Demonstration Setup	3-11
3.4 CAN Bootloader Demonstration Program.....	3-13
3.5 ADC Demonstration	3-15

Section 4	
Conclusion	4-17
4.1 Conclusion	4-17



Section 1

Introduction

The purpose of this section is to acquaint the user with the Atmel CAN Demo Board, the In-System Programming tool (FLIP), the 2 demonstration programs: CAN Generator and CAN Monitor, and finally with the 2 bootloaders (CAN and UART).

-
- 1.1 Abbreviations**
- FLIP: Flexible In-System Programmer
 - ISP: In-System Programming



Section 2

Getting Started

The purpose of this section is to acquaint the user with the Atmel CAN Demo Board, the In-System Programming tool (FLIP), the 2 demonstration programs: CAN Generator and CAN Monitor, and finally with the 2 bootloaders (CAN and UART).

2.1 Hardware Requirements

- CAN Demo board plus either a Second AT89STK-06 ⁽¹⁾ and/or a CAN Dongle⁽¹⁾ (IXXAT, PCAN, CANCARDX, CANPARI, or RMCANVIEW)
- RS-232 Serial Cable (DB9/DB9 Male/Female)
- Serial Cable DB9/DB9 Female/Female⁽¹⁾
- AT89C51CC03U-SLIM or AT89C51CC03U-SLSIM

■ AT89C51CC03C-S3SIM

- Notes:**
1. Not included in CAN Demo Board kit.
 2. The AT89STK-06 can also be used with T89C51CC01 and T89C51CC02 CAN controllers (requires optional adapter for T89C51CC02)
 3. The AT89STK-06 can be used with AT89C51AC3, T89C51AC2, T89C5115 controllers with ADC (requires optional adapter for T89C5115).

2.2 Software Requirements

Several demonstration programs can be found in the accompanying CD-ROM

- CAN generator UART bootloader demonstration program (HEX file)
- CAN monitor UART bootloader demonstration program (HEX file)
- CAN generator CAN bootloader demonstration program (HEX file)
- CAN monitor CAN bootloader demonstration program (HEX file)
- CAN Dongle program (HEX file)
- ADC demonstration program (HEX file)⁽¹⁾
- A self training package is also available on the CAN CD-ROM. It introduces CAN bit timing as well as the CAN Software Library.

Note: 1. The ADC demo is the only demonstration program that can be used with non-CAN products.

2.3 FLIP Software

FLIP software runs on Windows 98[®], ME[®], XP[®], Windows NT[®] and Windows 2000[®]. FLIP supports In-system programming of Flash C51 devices through RS-232 and CAN (with a dongle). The latest version of FLIP software can be found on the Atmel web site. The CAN CD-ROM includes a copy of FLIP 2. The following figures were assembled with Flip 2.2.4.

A Linux version of FLIP is also available.




Section 3

Software Demonstrations

3.1 UART Bootloader Demonstration Setup

The first demonstration (UART Bootloader) will use a PC running FLIP software to program a CAN Demo board through an RS-232 cable as illustrated in Figure 3-1.

Figure 3-1. PC to CAN Demoboard Through RS-232

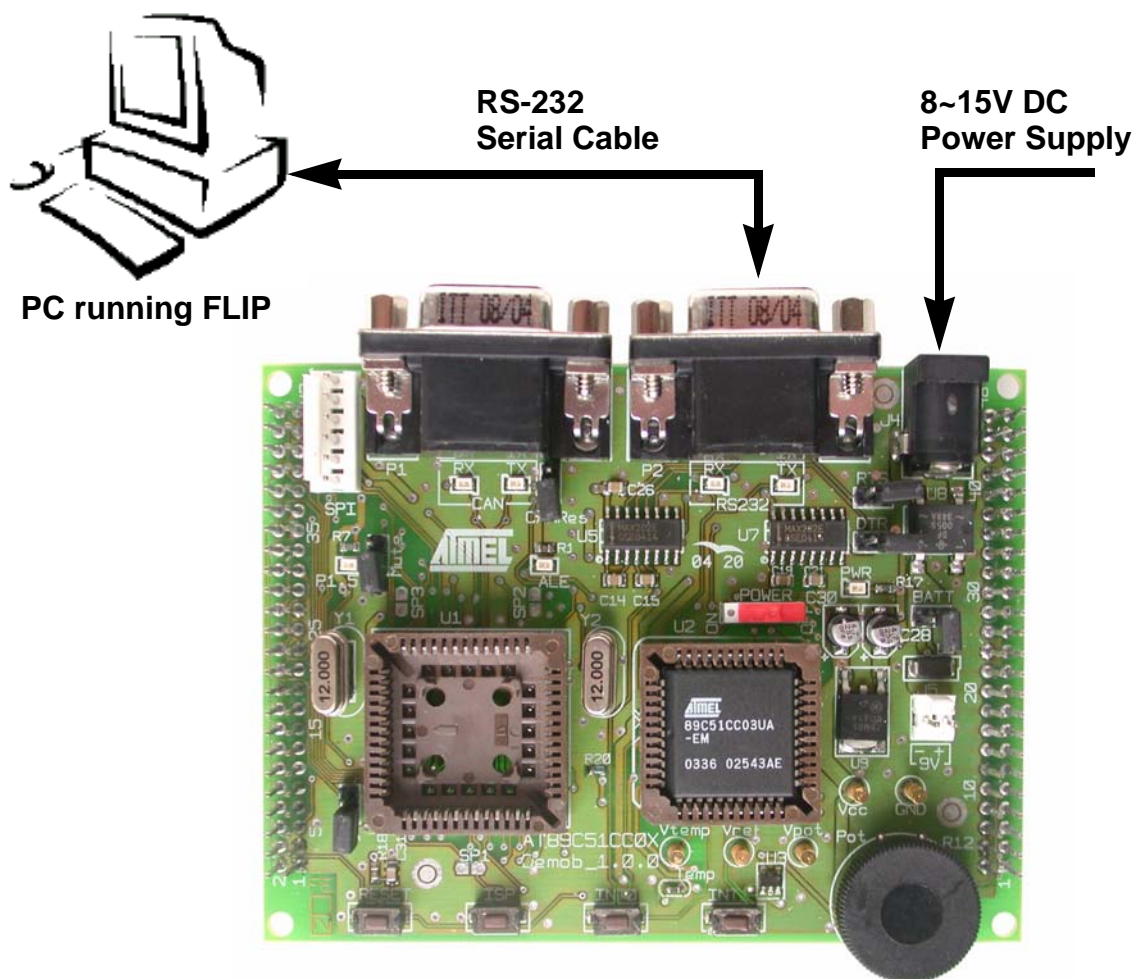

Software Demonstrations

3.1.1 Hardware Connection

1. Connect a 9 volts DC power supply.
2. Connect the AT89STK-06 to the PC through the RS-232 cable.
3. Ensure a AT89C51CC03U-SLSIM is connected to the AT89STK-06.

3.1.2 Setting the Hardware Condition

CAN microcontrollers come pre-programmed to start in Bootloader mode at first power-up. In the first ISP demonstration, the user will need to program the sample microcontroller set to boot in bootloader mode.

To enter in ISP mode with hardware conditions, press both the RESET (SW5) and ISP (SW4) buttons simultaneously. First release the RESET button and then the ISP button.

3.2 Using FLIP

In this section the user will program the AT89C51CC03UA-SLSIM microcontroller through the UART Bootloader using FLIP software. The following procedure will guide you through the programming of the demonstration program.


1. Run FLIP software.

Figure 3-2. Flip default window




- From the Device Menu, choose Select and select the device (AT89C51CC03) that is connected on the AT89STK-06.

Figure 3-3. FLIP Window With Device Selected

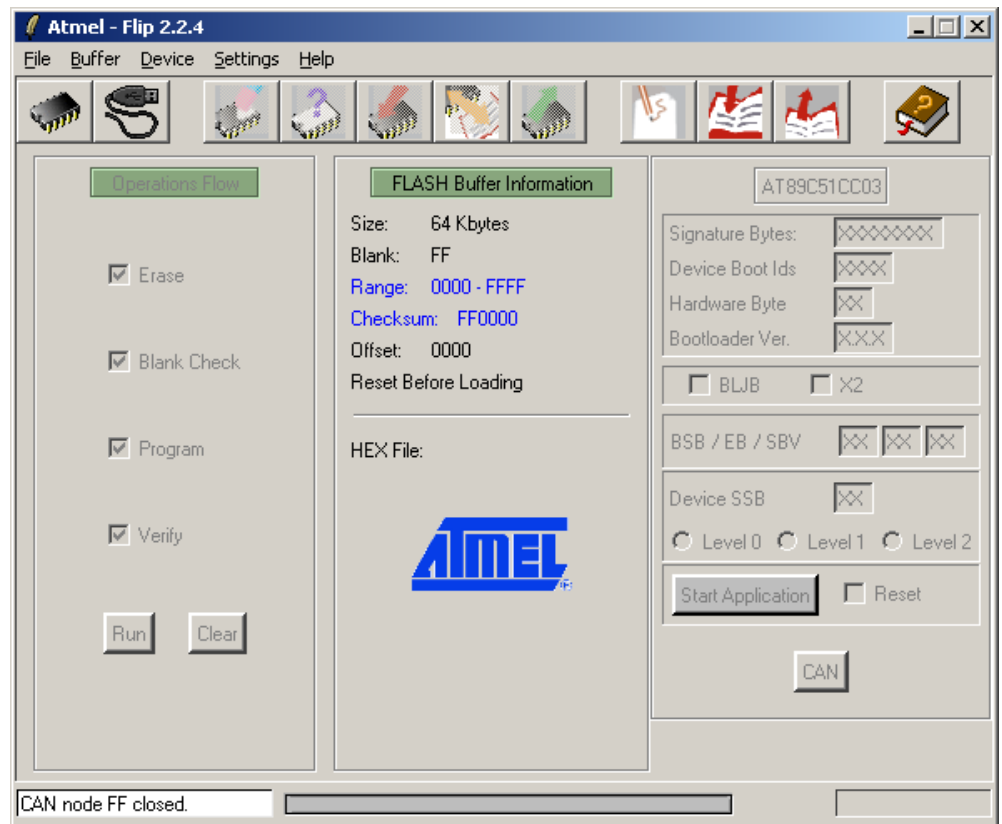

- From the “Settings” menu, select “Communication” and “RS232”. The following pop-up window appears and allows to select the COM port settings and Baud Rate.


Figure 3-4. COM Port Settings

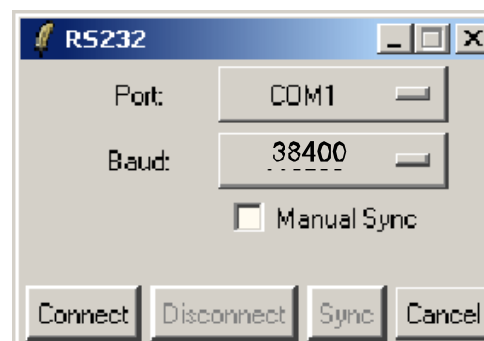

- Initialize the communication by selecting the ‘Connect’ button in the RS-232 pop-up window.
If the connection is successful, the FLIP window should look like Figure 3-5. Detailed explanations of the significance of the fields can be found in the product datasheet on the Atmel site www.atmel.com

Note: On certain laptops, it is necessary to perform the following procedure. Click 'Connect', reset the AT89STK-06, then click 'Sync' (For detail information, see FLIP user's manual).

Figure 3-5. Successful Connection on FLIP

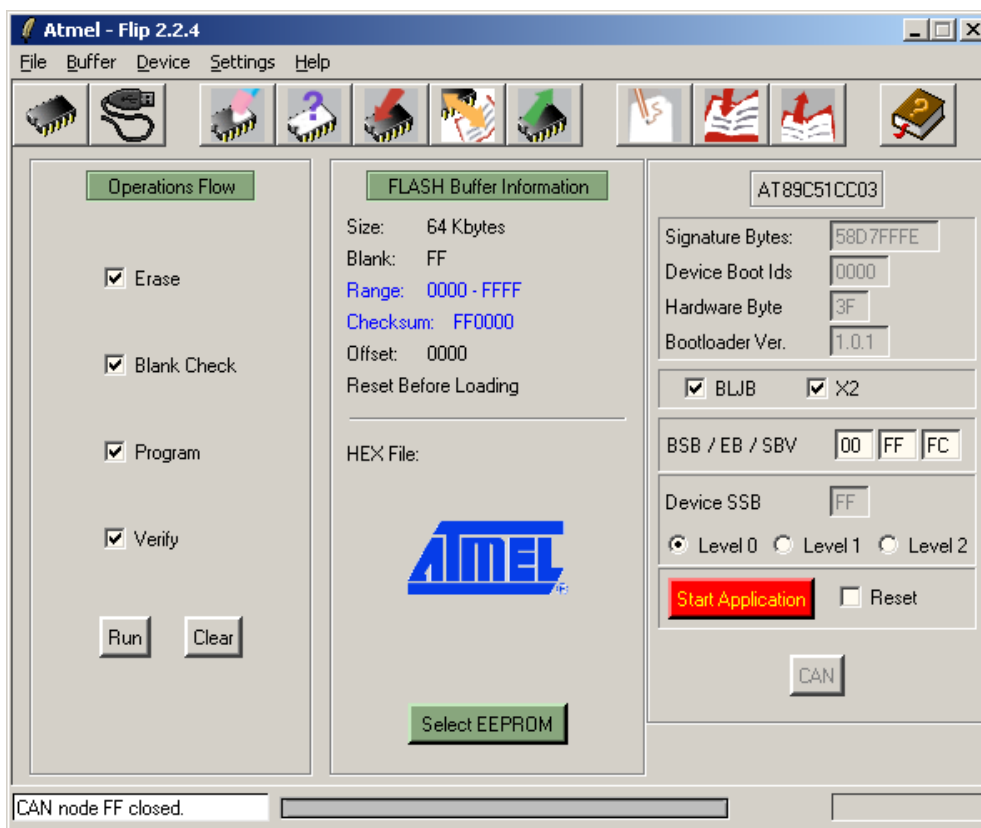

5. In the File menu, select 'Load HEX' and choose the demonstration program 'can_gen.hex'. This is the program that performs the demonstration data exchange.
The message 'HEX file can_gen.hex loading done' is displayed at the bottom of the FLIP window.
6. Ensure the following check boxes are selected in the Operations Flow section of FLIP:
 - Erase
 - Blank Check
 - Program
 - Verify

These are the operations that will be performed on the microcontroller.

7. Press the 'Run' button. Programming is executed.
The "Memory Verify Pass" message confirms programming is successful and that the microcontroller has been programmed.
8. Unchecked the BLJB box in order to execute the demonstration program after the next reset.
9. Ensure the 'Reset' box is checked, then press the 'Start Application' button.


It is possible to connect a CAN monitoring device such as a CANALYZER or equivalent on the CAN DB9 connector to verify that the messages are transmitted on the CAN Bus.



To view the CAN messages transmission, the AT89STK-06 can also be connected to a standard RS232 terminal (like Hyperterminal).

The Hyperterminal should be configured as presented in the following figure.

Figure 3-6. RS232 Configuration

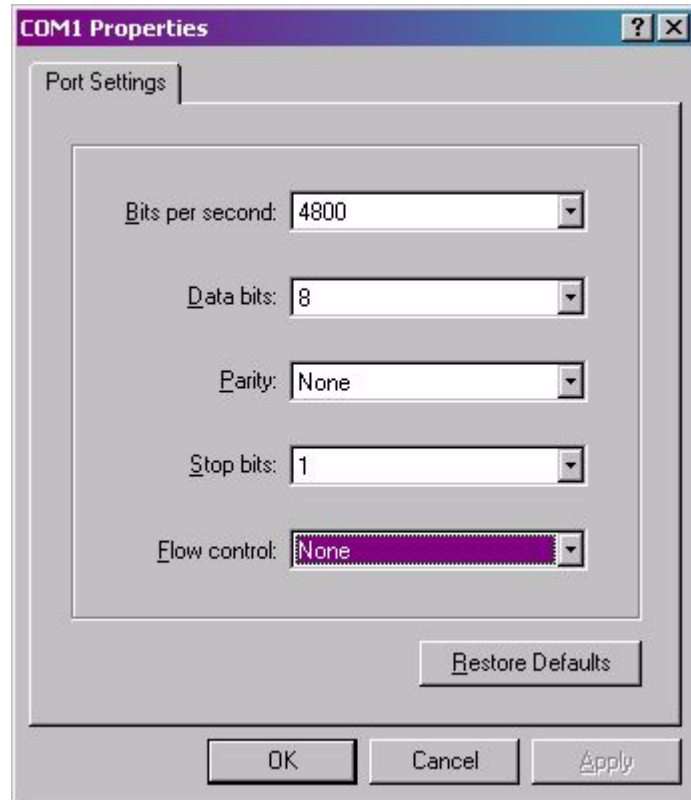

The following messages will appear on the RS232 terminal

Figure 3-7. CAN Generator RS232 output

```
toyo - HyperTerminal
File Edit View Call Transfer Help
[Icons]
AT89C51CC0x
CAN Generator
Tx: ID=0000 DLC=08
Data=1100000000000000
Tx: ID=0001 DLC=08
Data=2211000000000000
Tx: ID=0002 DLC=08
Data=3322110000000000
Tx: ID=0003 DLC=08
Data=4433221100000000
Tx: ID=0004 DLC=08
Data=5544332211000000
Tx: ID=0005 DLC=08
Data=6655443322110000
Tx: ID=0006 DLC=08
Data=7766554433221100
Connected 0:00:08 Auto detect Auto detect SCROLL CAPS NUM Capture Print echo
```

3.2.1 CAN Monitor Demonstration Program

Using a method similar to that discussed in the demonstration program above, it is possible to program the Monitor Demonstration 'can_mon.hex'. The Monitor Demonstration displays the content of any incoming messages on a RS232 Terminal (9600 bauds).

For users with two CAN Demo boards, it is possible to program the CAN generator demonstration 'can_gen.hex' on one board and the CAN Monitor demonstration 'mon_boot_can.hex' on the other. The connection is made using a CAN DB9/DB9 Male/Male cable.

Figure 3-8. CAN Monitor RS232 Output

```

toyo - HyperTerminal
File Edit View Call Transfer Help

ATMELE AT89C51CC0x
CAN Monitor

Rx: ID=0000 DLC=08
Data=1100000000000000

Rx: ID=0001 DLC=08
Data=2211000000000000

Rx: ID=0002 DLC=08
Data=3322110000000000

Rx: ID=0003 DLC=08
Data=4433221100000000

Rx: ID=0004 DLC=08
Data=5544332211000000

Rx: ID=0005 DLC=08
Data=6655443322110000

Connected 0:00:08  Auto detect  Auto detect  SCROLL  CAPS  NUM  Capture  Print echo

```


3.3 CAN Bootloader Demonstration Setup

In this section, 2 demonstration programs will be explained.

First we will program the Atmel Dongle via the UART. Second we will run the demonstration program from the AT89C51CC03CA-SLSIM microcontroller through a CAN bus to a second demoboard that will display the results on the UART.

If you use a CAN Dongle other than Atmel CAN go directly to Section 3.4 "CAN Bootloader Demonstration Program".

Figure 3-9. CAN Dongle for CAN Demo

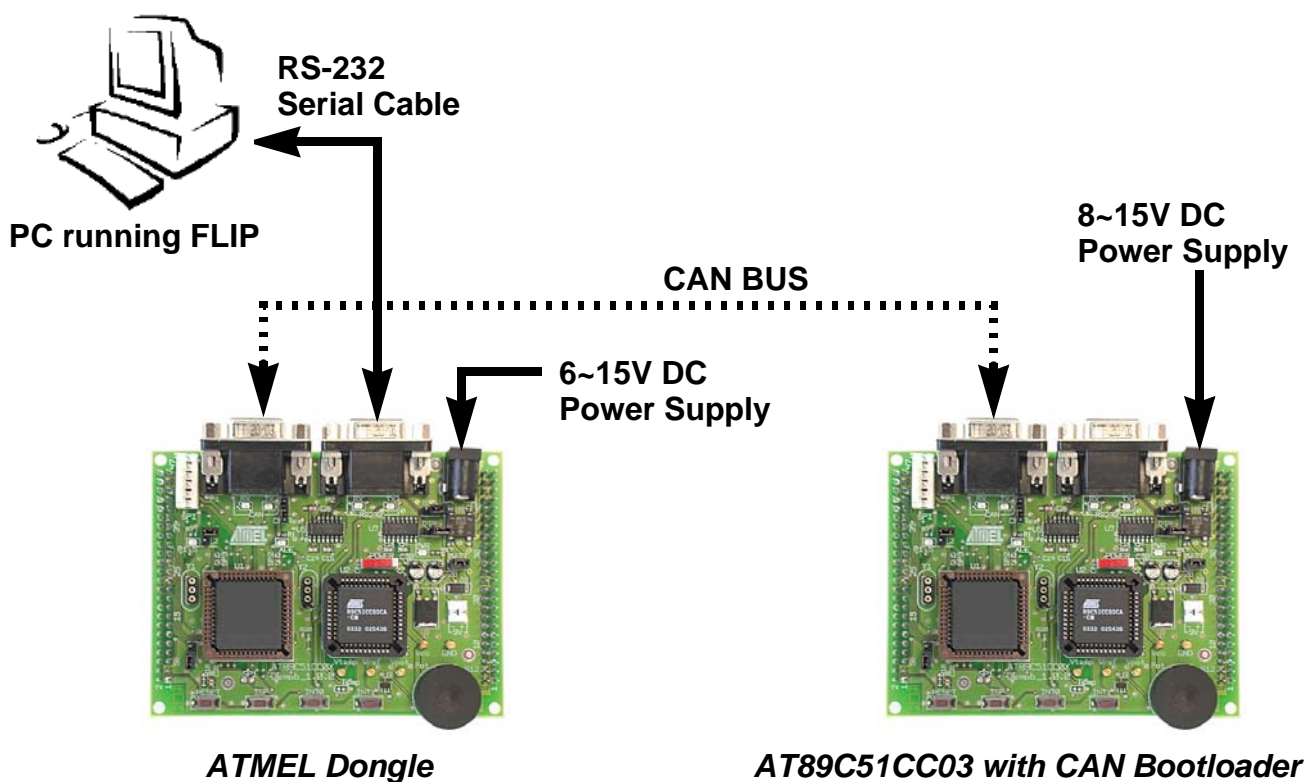


3.3.1 Hardware Connections

1. Connect a C51 Demo board and a CAN Demo board.
2. Connect a 9 volts DC power supply.
3. Ensure a AT89C51CC03CA-SLSIM microcontroller is connected to the CAN board.
4. Connect the RS-232 cable to your PC and to the DB9 female port on the C51 demo board.
5. Connect the CAN bus to the Atmel Dongle on both CAN boards. See Figure 3-9.

- 3.3.2 Programming Using FLIP** This section allows you to program the AT89C51CC03 microcontroller using FLIP software.
1. Run FLIP.
 2. From the Device Menu, choose 'Select' and select the device (AT89C51CC03) that is connected on your demo board.
 3. From the 'Settings' menu, select 'Communications' then 'RS-232'. Click 'Connect'.
 4. In the File menu, select 'Load HEX' and choose the demonstration program 'Atmel_dongle.hex'.
The message 'HEX file Atmel_dongle.hex loading done' is displayed at the bottom of the FLIP window.
 5. Ensure the following check boxes are selected in the Operations Flow section of FLIP:
 - Erase
 - Blank Check
 - Program
 - Verify
- These are the operations that will be performed on the microcontroller.
6. Ensure the BLJB box is unchecked, in order to boot the demonstration program after the next reset.
 7. Ensure the 'Reset' box is checked, then press the 'Start Application' button. The UART displays the CAN messages that the program generates.

-
- 3.4 CAN Bootloader Demonstration Program** The following procedure will guide you through the execution of the demonstration program.
1. From the FLIP window, click 'Device' and select 'AT89C51CC03'.
 2. From the 'Settings' menu select 'Communication' → 'CAN' and choose the type of Dongle you are using. (See FLIP user's manual)

Figure 3-10. Dongle Configuration

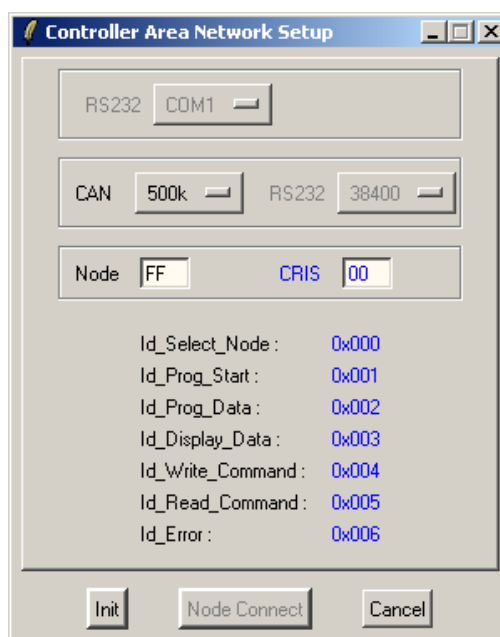


- Click 'Init', then select 'Node Connect'.
The dongle sends a node connect message with the Node Number Byte (NNB). 'NNB = FF' is the default NNB to which all CAN bootloaders will respond. If NNB is different than FF, the CAN microcontroller will respond only if its NNB matches the one specified in FLIP.

The CAN bootloader starts autobaud, and once it is ready, acknowledges the message to FLIP to indicate that the communication is established.

The default CRIS is 00. It is possible to set a different area for the 7 consecutive CAN message identifiers. FLIP and the CAN microcontroller must use the same CRIS to communicate.

- From the 'File' menu, select 'Load HEX' and select the 'can_gen.hex' file.
- Click 'Run' on the FLIP window. The CAN Generator program is successfully programmed. We will now program NNB and CRIS to different values.
- Click the "Set CAN Node" tab. The CAN Node Configuration dialog is displayed.

Figure 3-11. CAN Node Configuration dialog

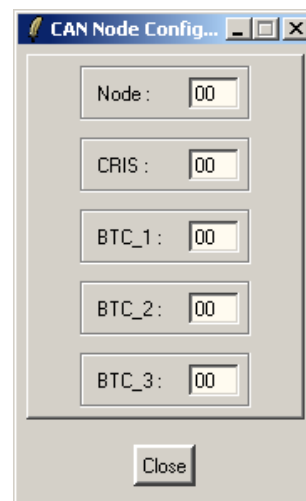

7. Change the Node setting to '0F' and CRIS to '08'. The BTC (Bit Timing Registers) settings remain unchanged. The NNB and CRIS settings are changed in order to give a unique number to the controller and to adapt it to Message Identifier mapping.
8. Click 'Set' to program the settings, then click 'Read' to verify that programming was successful.
9. Ensure the 'Reset' check box is selected.
10. Click 'Start Application'.
The microcontroller has been successfully programmed. The generator program will run (send CAN messages and display on the UART). The chip will now accept In-System Programming when 'NNB = FF' (default) or '0F', and only with 'CRIS = 08'.

3.5 ADC Demonstration


The purpose of this section is to demonstrate the basic functionality of the ADC module of the CAN microcontrollers.

Using the method similar to that discussed in the section above, it is possible to program the ADC Demonstration 'adc.hex'.

The demonstration software acquires an analog input voltage from the potentiometer and displays the converted value to the UART. The UART displays the content of any incoming messages on a RS232 Terminal (2400 bauds for XTAL frequency at 12MHz).

The ADC demonstration program can be used with AT89C51CC03, T89C51CC01, T89C51CC02, and AT89C51AC3, T89C51AC2, T89C5115.

Figure 3-12. ADC Demonstration RS232 output

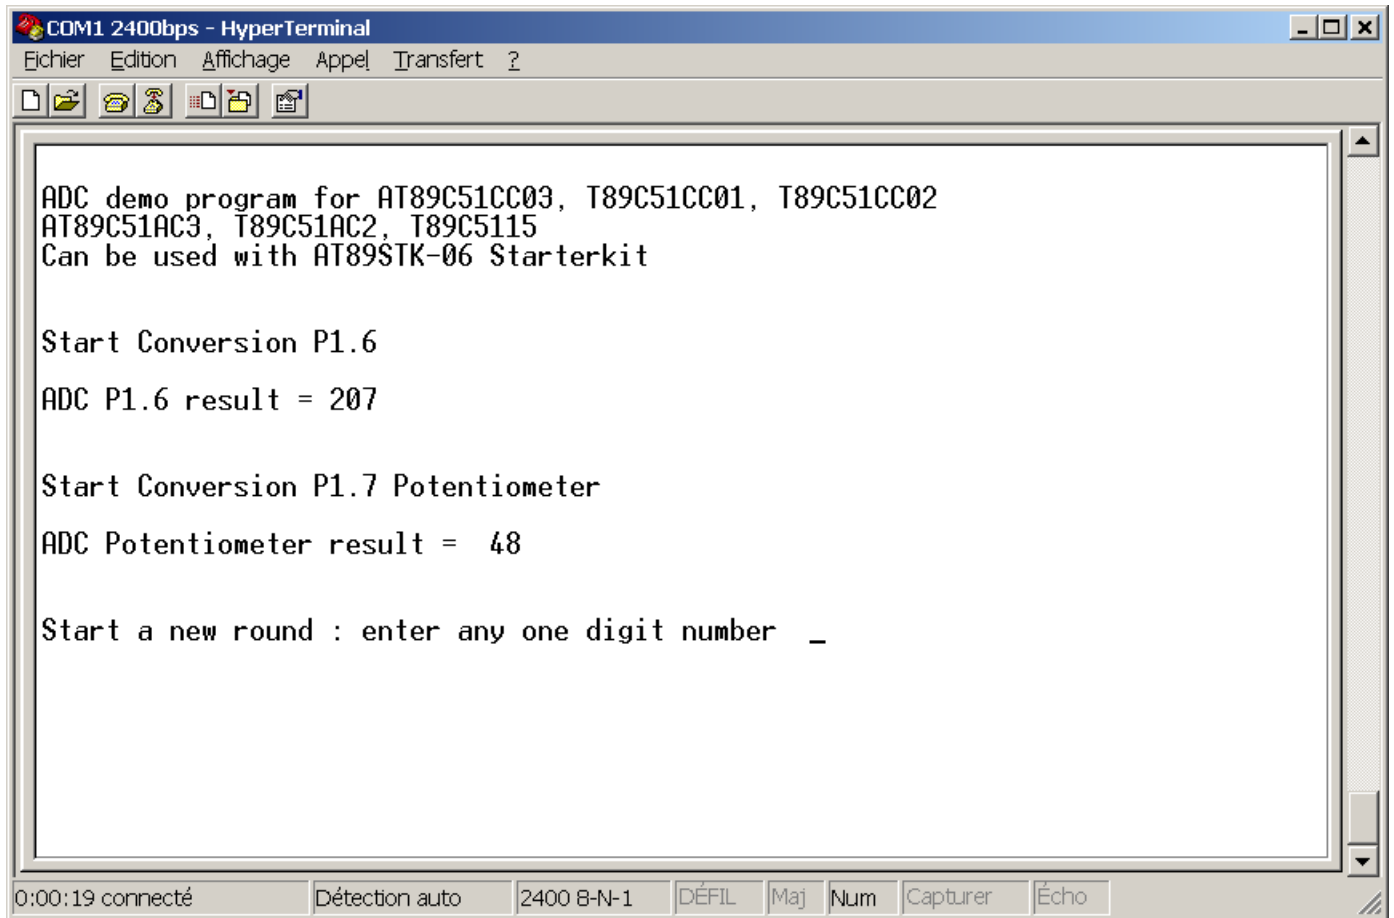

The image shows a HyperTerminal window titled "COM1 2400bps - HyperTerminal". The window contains the following text output from an ADC demo program:

```
ADC demo program for AT89C51CC03, T89C51CC01, T89C51CC02  
AT89C51AC3, T89C51AC2, T89C5115  
Can be used with AT89STK-06 Starterkit  
  
Start Conversion P1.6  
ADC P1.6 result = 207  
  
Start Conversion P1.7 Potentiometer  
ADC Potentiometer result = 48  
  
Start a new round : enter any one digit number _
```

The window also shows a status bar at the bottom with the following information: "0:00:19 connecté", "Détection auto", "2400 8-N-1", "DÉFIL", "Maj", "Num", "Capturer", and "Écho".



Section 4

Conclusion

4.1 Conclusion

We have successfully run 2 demonstration programs on the AT89C51CC03U with UART bootloader and 2 demonstration programs on the AT89C51CC03C with CAN bootloader. In the CAN bootloader demonstrations we also modified the NNB and CRIS in order to assign a unique number to the controller and adapt it to a Message Identifier mapping.

Using AT89C51CC03U with UART bootloader and AT89C51CC03C with CAN bootloader, the same demonstration programs can be run on T89C51CC01. This illustrates the full compatibility between AT89C51CC03 and T89C51CC01.



Atmel Headquarters

Corporate Headquarters

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 487-2600

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
TEL (41) 26-426-5555
FAX (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimhatsui
East Kowloon
Hong Kong
TEL (852) 2721-9778
FAX (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
TEL (81) 3-3523-3551
FAX (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
TEL (33) 2-40-18-18-18
FAX (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
TEL (33) 4-42-53-60-00
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
TEL 1(719) 576-3300
FAX 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
TEL (44) 1355-803-000
FAX (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
TEL (49) 71-31-67-0
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
TEL 1(719) 576-3300
FAX 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Data- com

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
TEL (33) 4-76-58-30-00
FAX (33) 4-76-58-34-80

e-mail

literature@atmel.com

Web Site

<http://www.atmel.com>

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2005. All rights reserved. Atmel®, logo and combinations thereof, Everywhere You Are® and others, are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.