# 3-338168-2 ACTIVE

### AMPLIMITE | AMPLIMITE HDP

TE Internal #: 3-338168-2

AMPLIMITE HDP, PCB D-Sub Connectors, Plug, Cable-to-Board, 9

Position, 2.74mm [.108in] Centerline, 2 Row, Row-to-Row Spacing

2.54 mm [.1 in]

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors >

D-Sub Plug Assembly: Standard, Right Angle, Shell Size 1, 2.74mm











Connector & Housing Type: Plug
Connector System: Cable-to-Board

Number of Positions: 9

Centerline (Pitch): 2.74 mm [ .108 in ]

Number of Rows: 2

All D-Sub Plug Assembly: Standard, Right Angle, Shell Size 1, 2.74mm (53)

### **Features**

### **Product Type Features**

Grounding Indents	With
Grounded	Yes
Grounding Straps	With
Footprint	10.3 mm[.406 in]
Shell Type	Front Metal Shell
Connector & Housing Type	Plug
Connector System	Cable-to-Board
D-Sub Shell Size	1
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Product Type	Connector

## **Configuration Features**



Performance Level	Level 2
Number of Positions	9
Number of Rows	2
PCB Mount Orientation	Right Angle
Preloaded	Yes
Body Features	
Plastic	No
Insert Material	Steel
Connector Profile	Standard
Post Size	.7 mm
Color	Black
Shell Plating Material	Tin
Shell Material	Steel
Contact Features	
Contact Mating Area Plating Material	Gold, Gold Flash
Contact Underplating Material	Palladium Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Shape & Form	Round
Contact Current Rating (Max)	6 A
Contact Mating Area Plating Thickness	.76 µm
Termination Features	
Grounding Clips	Without
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post Length	3.2 mm[.126 in]
Mechanical Attachment	
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention	With
Mating Retention Type	Screw



Connector Mounting Type	Board Mount
Boardlock Plating Material	Tin
Mounting Hole Diameter	3.1 mm
Boardlock Material	Phosphor Bronze
Housing Features	
Centerline (Pitch)	2.74 mm[.108 in]
Housing Material	Glass Filled Polyester
Housing Color	Black
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Approved Standards	DIN 41652
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tray
Packaging Quantity	55
Other	
Installation Height	7.3 mm

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2020 (205)



SVHC > Threshold: Not Yet Reviewed

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



TE Part # CAT-AM7-248H6
IDC D-Sub: Receptacle Kit, Wire to
Wire, Signal, 2.74 mm



TE Part # CAT-AM7-253 IDC D-Sub: Receptacle Assembly, Low Profile, Signal, 2.77 mm



TE Part # CAT-AM7-248H8
IDC D-Sub: Receptacle Assembly,
Wire to Wire, Signal, 2.74 mm




TE Part # CAT-AM7-248H9
IDC D-Sub: Receptacle Kit, Cable to
Cable, Signal, 2.77 mm



Also in the Series | AMPLIMITE HDP



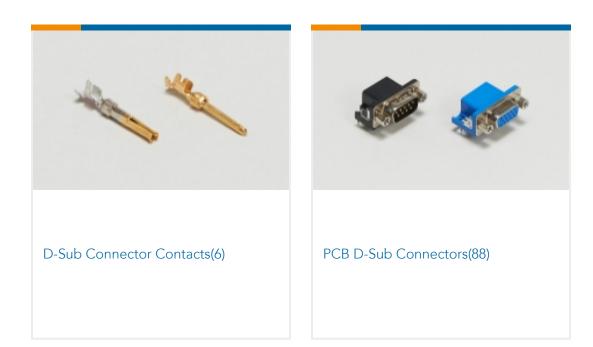

## Customers Also Bought


















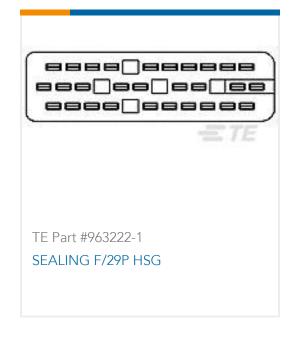



## **Documents**

Product Drawings
9POL HDP20 PLUGASSY

English

**CAD Files** 

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-338168-2\_G.2d\_dxf.zip



English

**Customer View Model** 

ENG\_CVM\_CVM\_3-338168-2\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_3-338168-2\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

AMPLIMITE Subminiature D Connectors - Right-Angle Posted Connectors

English

**Product Environmental Compliance** 

TE Material Declaration

English